


BLUTOP Flanged Duckfoot Bend

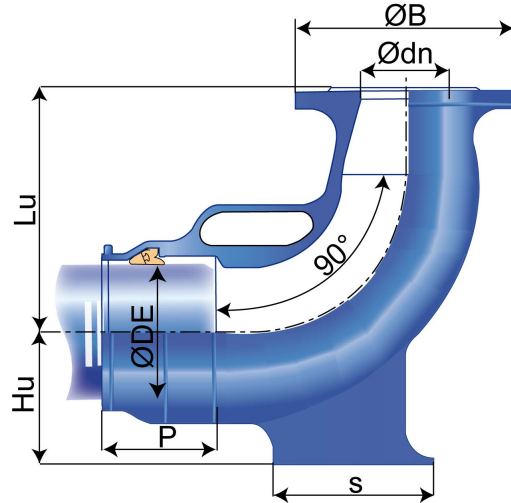

Angle	DN/OD	Ø DE	Ø dn	P	Lu	Hu	Ø B PN10-16	s	Mass	References
degree	mm	mm	mm	mm	mm	mm	mm	mm	kg	
90°	75	75	80	87,0	165	110	200,0	107	8,3	KXL75DF0E
90°	90	90	80	92,5	165	110	200,0	107	8,0	KXL90DF0E
90°	110	110	80	99,0	180	125	200,0	126	11,4	KXM11DF0E
90°	125	125	80	104,0	220	120	200,0	146	13,6	KXM12DF0E
90°	160	160	80	114,0	220	150	200,0	146	16,2	KXM16DF0E
90°	160	160	100	114,0	220	150	220,0	146	16,4	KXM16DF0F

* Fixed Flange DN80 or 100mm. 8 bolts are necessary for the flange.

Field of use:

- For drinking water supply networks
- Manufactured to last more than 100 years
- Total compatibility with drinking water. All the constituent materials have "Attestation de Conformité Sanitaire" in France (ACS), WRAS and DWI agreements in UK, DVGW agreement in Germany

Main characteristics:

- Ductile iron fittings conform to EN 12842-2000, compatible with PVC tubes according to EN 1452-1999 and polyethylene tubes according to EN 12201-2003
- Ductile iron fittings conform to ISO 16631-2016
- Internal and external coating : blue epoxy powder (thickness 250 microns) according to EN 14901-2006
- "Avis technique CSTB", WRC agreement, PAS DVGW