


Gasket ViLoK® (NBR Standard Vi) DN80-600

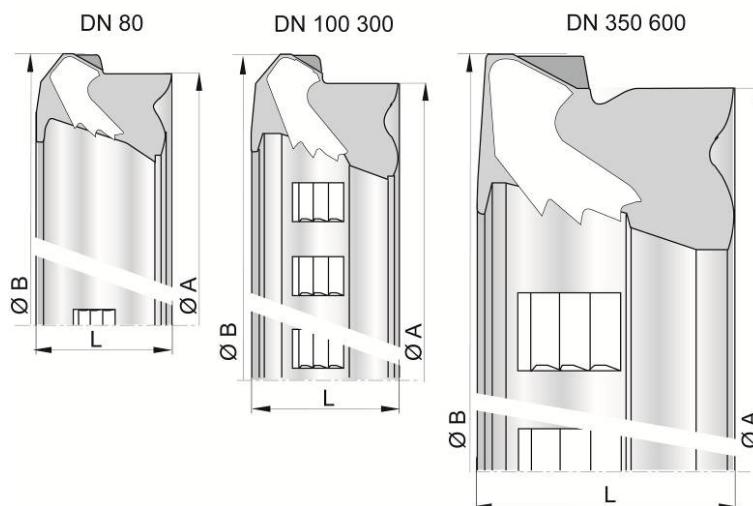

The anchored gasket ViLoK (with inserts) has the same shape than the STANDARD gasket, and fits the same socket. The gasket ViLoK has inserts which anchor the socket joint by hooking into the pipe spigot (or the fitting) after the assembling.

DN	PFA	L	Ø A	Ø outside B	Mass	References
mm	bar	mm	mm	mm	kg	
80	16	27,2	122,9	131,7	0,210	JSA80CW
100	16	27,1	143,8	154,8	0,280	JSB10CW
125	16	28,0	170,7	181,7	0,331	JSB12CW
150	16	27,6	197,7	208,5	0,407	JSB15CW
200	16	28,4	250,5	261,9	0,611	JSB20CW
250	12	31,0	303,5	314,9	0,858	JSB25CW
300	12	35,0	359,5	371,1	1,308	JSB30CW
350	12	34,5	414,0	424,0	1,570	JSB35CW
400	12	35,8	466,5	476,5	1,840	JSB40CW
450	11	37,5	519,8	529,8	2,350	JSB45CW
500	10	38,5	573,4	583,4	2,710	JSB50CW
600	8	41,0	680,2	691,0	3,780	JSB60CW

Field of use:

- For sewage networks under pressure and full pipes
- Waste water, raw water, mixed sanitary and rain water of roadway system
- For mineral acid effluents and base (pH1 to pH13)
- For organic acid effluents and base (pH3 to pH12)
- Hydrocarbon traces accepted
- No industrial water (please consult our Technical Department), no rain water

INTEGRAL
SEWAGE
DN 80 to 600



03/10/2016

AINJTXXSVI004

- In case of polluted grounds, please consult our Technical Department

Main characteristics:

- Standard gasket in Nitrile NBR
- EN 598, EN 681.1 WG
- Designed according to the regulatory texts:
 - NF EN 476: general prescriptions for components used in the networks
 - NF EN 752: Conception of sewage projects
 - NF EN 1610: Reception of the works
 - CCTG: Fascicule 70 (sewage work)