


Hydraulic manhole cover AKSESS 450 to 800 B125 class - Non locked

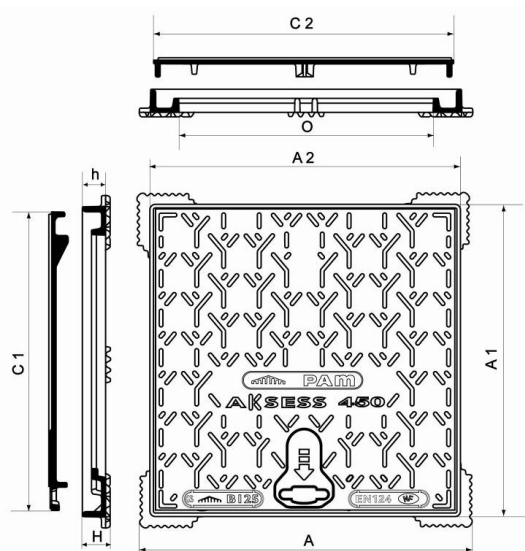

Type	OxO	AxA	A1xA2	C1xC2	H	h	Cover mass	Total mass	Packaging	References
	mm	mm	mm	mm	mm	mm	kg	kg		
450	350x350	460x460	427x427	414x412	38	32	8.4	14,75	10 / 40	CBAK45HF
500	400x400	510x510	477x476	462x461	38	32	11.2	18,4	10 / 40	CBAK50HF
550	450x450	550x580	527x527	512x514	38	32	18.2	26	10	CBAK55HF
550x700	450x600	560x710	527x677	514x662	38	32	24.4	32.9	10	CBAK75HF
600	500x500	610x610	577x575	562x563	38	32	22.5	30.3	10	CBAK60HF
700	600x600	710x710	677x676	662x662	38	32	34.5	43.8	10	CBAK70HF
800	700x700	820x820	785x786	771x771	41	35	44.3	56.4	10	CBAK80HF

Material and coating:

- Frame and cover in Ductile Iron EN GJS 400-15: varnish or bituminous coating

Field of application:

- B125 class (Group 2) according to standard EN124, footways, pedestrian areas and comparable areas, car parks and car parking decks.

Main characteristics:

- Single seal hydraulic manhole cover.
- Non-rock system ensuring the stability of the cover in its frame.
- Frame with notched flange enabling an effective bedding.

<p>AKSESS MUNICIPAL CASTINGS</p>		<p>02/29/2016</p>
		<p>VB12RENAKS400</p>

- Easy and ergonomic handling with hinged or slid opening.
- Locked version being the object of a specific reference.