


BLUTOP Taper

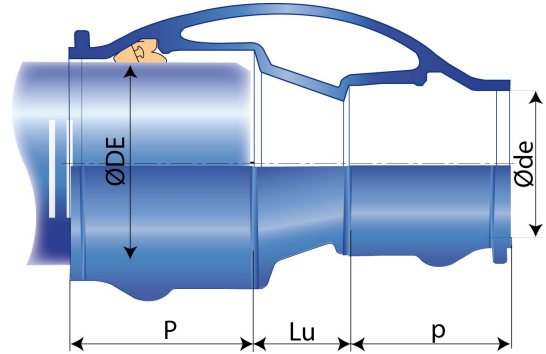

| DN/OD | Ø DE | Ø de | P | p | Lu | Mass | References |
|-------|------|------|-------|-------|------|------|------------|
| mm | mm | mm | mm | mm | mm | kg | |
| 90 | 90 | 75 | 92,5 | 87,0 | 40,0 | 3,70 | KXL90VE0C |
| 110 | 110 | 75 | 99,0 | 87,0 | 50,0 | 4,60 | KXM11VE0C |
| 110 | 110 | 90 | 99,0 | 92,5 | 50,5 | 5,00 | KXM11VE0D |
| 125 | 125 | 75 | 104,0 | 87,0 | 55,0 | 5,10 | KXM12VE0C |
| 125 | 125 | 90 | 104,0 | 92,5 | 50,0 | 5,20 | KXM12VE0D |
| 125 | 125 | 110 | 104,0 | 99,0 | 45,0 | 5,50 | KXM12VE0E |
| 140 | 140 | 90 | 108,0 | 92,5 | 50,0 | 5,51 | KXM14VE0D |
| 140 | 140 | 110 | 108,0 | 99,0 | 45,0 | 5,91 | KXM14VE0E |
| 140 | 140 | 125 | 108,0 | 104,0 | 45,0 | 6,29 | KXM14VE0G |
| 160 | 160 | 75 | 114,0 | 87,0 | 65,0 | 6,50 | KXM16VE0C |
| 160 | 160 | 90 | 114,0 | 92,5 | 60,0 | 7,00 | KXM16VE0D |
| 160 | 160 | 110 | 114,0 | 99,0 | 55,0 | 7,40 | KXM16VE0E |
| 160 | 160 | 125 | 114,0 | 104,0 | 50,0 | 7,80 | KXM16VE0G |
| 160 | 160 | 140 | 114,0 | 108,0 | 50,0 | 7,43 | KXM16VE0H |

Field of use:

- For drinking water supply networks
- Manufactured to last more than 100 years
- Total compatibility with drinking water. All the constituent materials have “Attestation de Conformité Sanitaire” in France (ACS), WRAS and DWI agreements in UK, DVGW agreement in Germany

Main characteristics:

- Ductile iron fittings conform to EN 12842-2000, compatible with PVC tubes according to EN 1452-1999 and polyethylene tubes according to EN 12201-2003
- Ductile iron fittings conform to ISO 16631-2016
- Internal and external coating : blue epoxy powder (thickness 250 microns) according to EN 14901-2006
- “Avis technique CSTB”, WRC agreement, PAS DVGW