


**BLUTOP Flanged Socket**

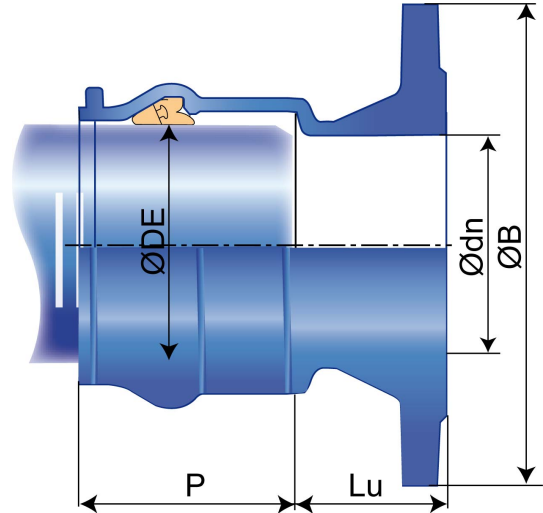

DN/OD	Ø DE	Ø dn	P	Lu	Ø B PN10-16	Ø B PN25	Mass PN10-16	Mass PN25	References PN10-16	References PN25
<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>kg</i>	<i>kg</i>		
75	75	60	87,0	58	175	175	5,0	4,2	KXL75BE1C	KXL75BE3C
75	75	65	87,0	58	185	185	5,3	4,7	KXL75BE1D	KXL75BE3D
90	90	80	92,5	68	200	200	5,5	5,5	KXL90BE1E	KXL90BE1E
110	110	100	99,0	68	220	235	6,7	7,4	KXM11BE1F	KXM11BE3F
125	125	125	104,0	66	250	270	8,2	8,9	KXM12BE1G	KXM12BE3G
140	140	125	108,0	62	250	270	9,1	9,1	KXM14BE1G	KXM14BE3G
160	160	150	114,0	68	285	300	11,0	12,1	KXM16BE1J	KXM16BE3J

**Field of use:**

- For drinking water supply networks
- Manufactured to last more than 100 years
- Total compatibility with drinking water. All the constituent materials have "Attestation de Conformité Sanitaire" in France (ACS), WRAS and DWI agreements in UK, DVGW agreement in Germany

**Main characteristics:**

- Ductile iron fittings conform to EN 12842-2000, compatible with PVC tubes according to EN 1452-1999 and polyethylene tubes according to EN 12201-2003
- Ductile iron fittings conform to ISO 16631-2016
- Internal and external coating : blue epoxy powder (thickness 250 microns) according to EN 14901-2006
- "Avis technique CSTB", WRC agreement, PAS DVGW