


IZIFIT Gasket

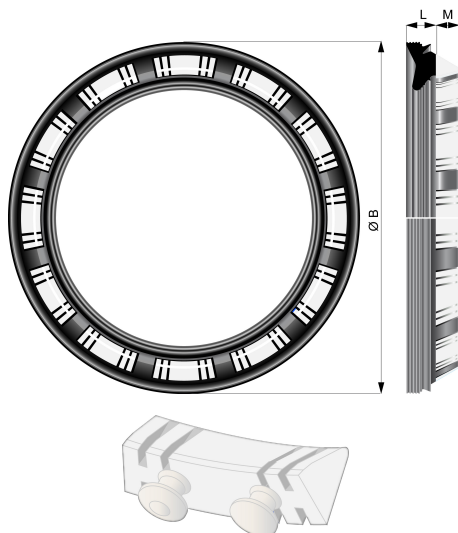

DN/OD	L	M	Ø B	Mass
<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>kg</i>
75	13,8	8,5	100,2	0,059
90	13,7	8,4	116,0	0,067
110	13,7	9,4	136,3	0,081
125	16,5	8,9	153,8	0,108

Field of use:

- For drinking water supply networks and connection with plastics piping systems for water transport under pressure in PVC-U or PVC-O
- EPDM has an "Attestation de Conformité Sanitaire" in France (ACS), WRAS and DWI agreements in UK, DVGW agreement in Germany

Main characteristics:

- Elastomer quality: EPDM
- Plastic sector