


BLUTOP Flanged Spigot

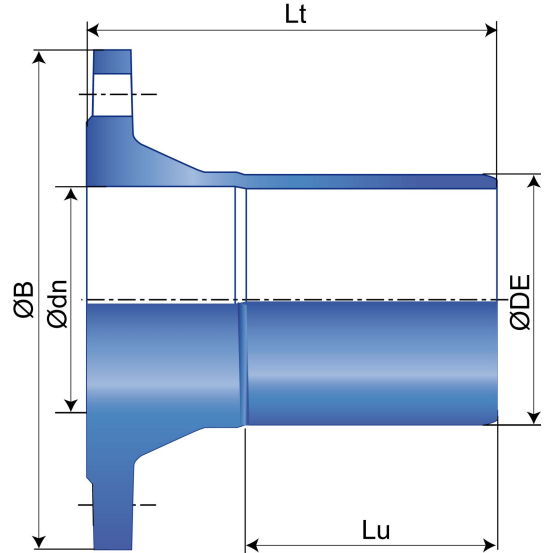

DN/OD	Ø DE	Ø dn	Lu	Lt	Ø B PN10-16	Ø B PN25	Mass PN10-16	Mass PN25	References PN10-16	References PN25
<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>kg</i>	<i>kg</i>		
75	75	60	98	158	175	175	3,85	3,80	KXL75BU1C	KXL75BU3C
75	75	65	98	158	185	185	4,15	4,10	KXL75BU1D	KXL75BU3D
90	90	80	102	167	200	200	4,70	4,70	KXL90BU1E	KXL90BU1E
110	110	100	110	180	220	235	6,00	6,70	KXM11BU1F	KXM11BU3F
125	125	125	114	188	250	270	7,90	8,90	KXM12BU1G	KXM12BU3G
140	140	125	119	190	250	270	8,56	8,56	KXM14BU1G	KXM14BU3G
160	160	150	127	197	285	300	12,10	12,10	KXM16BU1J	KXM16BU3J

Field of use:

- For drinking water supply networks
- Manufactured to last more than 100 years
- Total compatibility with drinking water. All the constituent materials have “Attestation de Conformité Sanitaire” in France (ACS), WRAS and DWI agreements in UK, DVGW agreement in Germany

Main characteristics:

- Ductile iron fittings conform to EN 12842-2000, compatible with PVC tubes according to EN 1452-1999 and polyethylene tubes according to EN 12201-2003
- Ductile iron fittings conform to ISO 16631-2016
- Internal and external coating : blue epoxy powder (thickness 250 microns) according to EN 14901-2006
- “Avis technique CSTB”, WRC agreement, PAS DVGW