


BLUTOP semi-sliding Collar with embossing for drilling

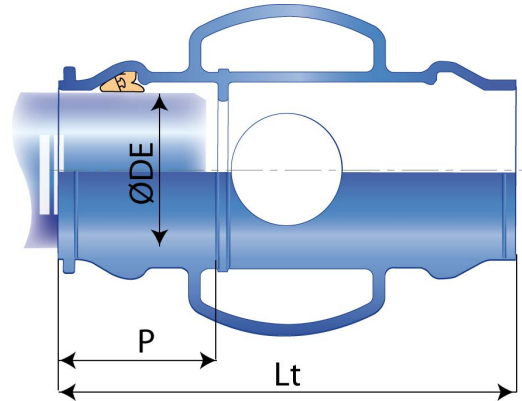

| DN/OD | Ø DE | P | Lt | Mass | References |
|-----------|-----------|-----------|-----------|-----------|------------|
| <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>kg</i> | |
| 75 | 75 | 87,0 | 254 | 5,3 | KXL75MM |
| 90 | 90 | 92,5 | 265 | 6,3 | KXL90MM |
| 110 | 110 | 99,0 | 275 | 7,3 | KXM11MM |
| 125 | 125 | 104,0 | 295 | 8,8 | KXM12MM |
| 140 | 140 | 108,0 | 305 | 9,0 | KXM14MM |
| 160 | 160 | 114,0 | 315 | 10,7 | KXM16MM |

(*) Embossing adapted and planned for:

- **"Metric drilling" M40X3 or M55X3 - Collar delivered without drilling**
- **"Gas drilling" ¾", 1", 1 ¼", 1 ½", 2" - Collar delivered without drilling**

Field of use:

- For drinking water supply networks
- Manufactured to last more than 100 years
- Total compatibility with drinking water. All the constituent materials have "Attestation de Conformité Sanitaire" in France (ACS), WRAS and DWI agreements in UK, DVGW agreement in Germany

Main characteristics:

- Ductile iron fittings conform to EN 12842-2000, compatible with PVC tubes according to EN 1452-1999 and polyethylene tubes according to EN 12201-2003
- Ductile iron fittings conform to ISO 16631-2016
- Internal and external coating : blue epoxy powder (thickness 250 microns) according to EN 14901-2006
- "Avis technique CSTB", WRC agreement, PAS DVGW

Note: Semi-sliding collar with embossing for drilling at time of connection