
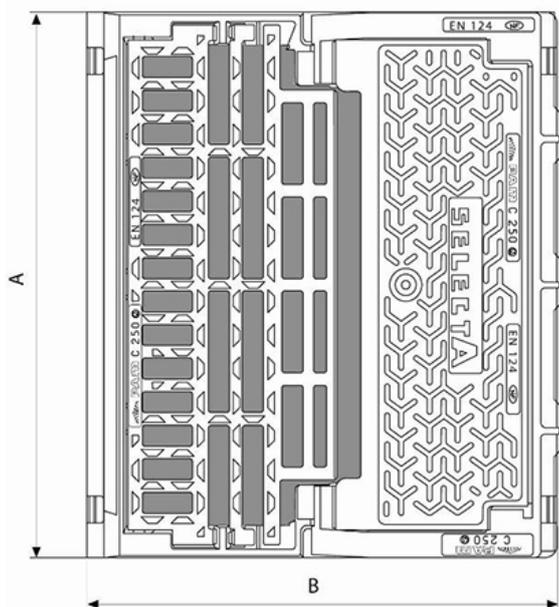


**SELECTA MAXI Gully unit A profile - C250 class**

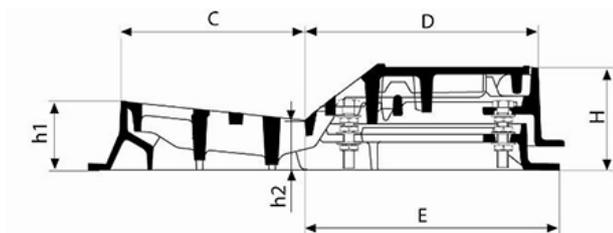

AxB	Grating mass	Cover mass	Mass of frame + extension	Total mass	Waterway area	Packaging	References
mm	kg	kg	kg	kg	dm <sup>2</sup>		
750x640	25.0	22.0	35.5	82.5	9.4 → 10.7	6	ECSE75SFX11

AxB	C	D	E	H	h1	h2	Depth adjustment
mm	mm	mm	mm	mm	mm	mm	mm
750x640	250	310	347	155	100	75	20

Measurements of extension: (compared to the water wire) - Low position= 69 mm - High position = 89 mm

**Material and coating:**

- Frame, grating and cover in Ductile Iron EN GJS 400-15: water base

<b>SELECTA</b> <b>MUNICIPAL CASTINGS</b>		01/04/2017
		<b>VC25BENSEL207</b>

### **Field of application:**

- C250 class (Group 3) according to standard EN 124, destined to the circulated pavements and similar locations exposed to the access of vehicles.
- Compatible with the A1 and A2 kerbs and CS2, CS3 and CS4 gutters according standard to NF P 98-340.

### **Main characteristics:**

- Grating and cover:
  - Hinged separately and can be easily dismantled
  - Secured by spring-bar lock requiring a tool for the opening.
- Grating:
  - With raised selector bar allowing the screening of debris
  - Optimized design for absorption and safety.
- Total opening offering a wide surface of access: 540 x 450 mm.
- Frame in 2 parts adjustable in height and slope.