

## Technical Manual



The technical data are not binding and not expressly warranted characteristics of the goods. They are subject to change.  
Please consult our general conditions of supply.

Version 2.60

# TABLE OF CONTENTS

<b>General information</b>	4
Connect pipes better, quicker and safer in various applications	5
High flexibility and safety margins	6
Features and unique patented solutions	7
Countless benefits	8
Approvals	10
In-house testing facilities	11
Type overview	14
<b>Technical data</b>	15
Technical data overview	16
Fitting instructions	18
Pipe dimensions and minimum pipe wall thickness at nominal pressure PN	26
Installation time	27
Accessories	28
Angular deflection	29
Axial misalignment	30
Retrofitting pipe sections and fittings	31
Axial movement / change in length	32
Bending / torsion	34
Underground pipelines	35
Freely installed pipelines	36
Installation of vertical pipelines	37
Electrical conductivity UNI-Flex / UNI-Rep	38
Electrical conductivity UNI-Grip	39
<b>Product range</b>	41
UNI-Grip L Ø 21 - 172 mm / PN 16	42
UNI-Grip S Ø 21 - 172 mm / PN 16	44
UNI-Grip S Ø 188 - 290 mm / PN 16	46
UNI-Grip LE Ø 64 - 172 mm / PN 10	48
UNI-Grip SE Ø 64 - 172 mm / PN 10	50
UNI-Grip S Ø 213 - 374 mm / PN 10	52
UNI-Grip S Ø 188 - 516 mm / PN 6	54
UNI-Grip S Ø 291 - 745 mm / PN 2.5	56
UNI-Plastgrip L Ø 39 - 172 mm / PN 10	58
UNI-Plastgrip S Ø 39 - 172 mm / PN 10	60
UNI-Plastgrip S Ø 175 - 363 mm / PN 10	62
UNI-Plastgrip LE Ø 72 - 172 mm / PN 6	64
UNI-Plastgrip SE Ø 72 - 172 mm / PN 6	66
UNI-Plastgrip S Ø 175 - 515 mm / PN 6	68
UNI-Plastgrip S Ø 315 - 640 mm / PN 2.5	70
UNI-Combigrip L Ø 39 - 172 mm / PN 10	72
UNI-Combigrip S Ø 39 - 172 mm / PN 10	74
UNI-Combigrip S Ø 175 - 363 mm / PN 10	76
UNI-Combigrip LE Ø 72 - 172 mm / PN 6	78
UNI-Combigrip SE Ø 72 - 172 mm / PN 6	80
UNI-Combigrip S Ø 175 - 515 mm / PN 6	82
UNI-Combigrip S Ø 315 - 640 mm / PN 2.5	84
UNI-Flex L Ø 21 - 172 mm / PN 16	86
UNI-Flex S Ø 21 - 172 mm / PN 16	88
UNI-Flex S Ø 188 - 745 mm / PN 16	90
UNI-Flex S Ø 762 - 930 mm / PN 16	92
UNI-Flex S Ø 188 - 745 mm / PN 10	94
UNI-Flex S Ø 762 - 1452 mm / PN 10	96
UNI-Flex S Ø 280 - 745 mm / PN 6	98
UNI-Flex S Ø 762 - 1471 mm / PN 6	100
UNI-Flex S Ø 523 - 745 mm / PN 2.5	102
UNI-Flex S Ø 762 - 2090 mm / PN 2.5	104
UNI-Rep L Ø 36 - 172 mm / PN 16	106
UNI-Rep S Ø 36 - 172 mm / PN 16	108
UNI-Rep S Ø 188 - 745 mm / PN 16	110
UNI-Rep S Ø 188 - 745 mm / PN 10	112
UNI-Rep S Ø 280 - 745 mm / PN 6	114
Inserts	116
UNI-Fire Ø 21 - 425 mm	118
Checklist for information request	119

# UNI-COUPLING



*Left: Twan van Heesch and right: Piet van de Warenburg*

## Dear customers,

We are very proud to present you our new company, UNI-Coupling. After 3 years of development we have succeeded in producing an improved stainless steel flexible grip coupling for connecting pipes.

Of course, we have passed all the tests necessary to get the approvals for the shipping industry (ABS, DNV-GL, LR, RINA, KS).

### **Beyond that we have also improved the following:**

1. Patented gasket, no strip needed to cover the gap between 2 pipes.
2. Standard W5, 316 Ti stainless steel.
3. Wider range, means 25% less stock.

As the holding company United Pipeline Products, we have invested in all the latest new technology such as;

- geothermal installation, ultrasonic stain bath,
- automation systems (ERP, EXACT, bar code printers, VOIP),
- production technologies (MIG/MAG/TIG welding robots),
- PLC-controlled automated cutting and punching line,
- NEN-EN-ISO 9001:2008 and NEN-EN-ISO 14001:2004.

Many thanks for your interest in our products. If there are still any questions, please let us know. Our technical support team will be happy to help you.

A handwritten signature in black ink, appearing to read 'Piet van de Warenburg'.

Piet van de Warenburg

A handwritten signature in black ink, appearing to read 'Twan van Heesch'.

Twan van Heesch

# CONNECT PIPES BETTER, QUICKER AND SAFER IN VARIOUS APPLICATIONS

**With the UNI-Coupling you connect pipes the easy way. Better than a threaded connection, quicker than a welded connection and safer than a flanged connection.**

The stainless steel UNI-Coupling has a number of advantages compared to similar couplers. The UNI-Coupling has two specific parts making this coupler unique. A patented seal that eliminates the risk of leakage and a special shaped anchoring grip ring, which ensures a reliable, restraint connection.

Moreover the UNI-Coupling can be installed fast and thanks to the wide range, it can effortlessly connect different types of pipes with various outside diameters. Better, quicker and safer than you are used to. The UNI-Coupling offers you an easy to install, time saving and money saving solution.

**The UNI-Coupling has approvals for several applications such as shipbuilding, offshore, water treatment, chemical process industry, commercial buildings and infrastructure.**

## **Applications:**

- + Reverse osmosis
- + Process water
- + Oil pipelines
- + Gas turbines
- + Cooling water
- + Compressed air
- + Rinse water
- + Emergency showers
- + Extinguishing lines
- + Tank storage
- + Bilge water
- + Ballast water
- + Sprinkler lines
- + Drinking water
- + District heating
- + Air conditioning
- + Wastewater
- + Water distribution
- + Gas distribution



# HIGH FLEXIBILITY AND SAFETY MARGINS


## The basic principle of UNI-Coupling.

### Two types of UNI-Coupling

UNI-Coupling applies one unique technical principle in two basic types of products and is available for any type of pipe combination to be connected. Based on the well proven coupling technology, we combine various pipe materials for different applications.

Safety and reliability has been proven and certified by public authorities, insurance companies, technical inspectors and licensing institutes for all the major industrial sectors. You can rely on the UNI-Coupling.


### UNI-Grip / UNI-Plastgrip / UNI-Combigrp

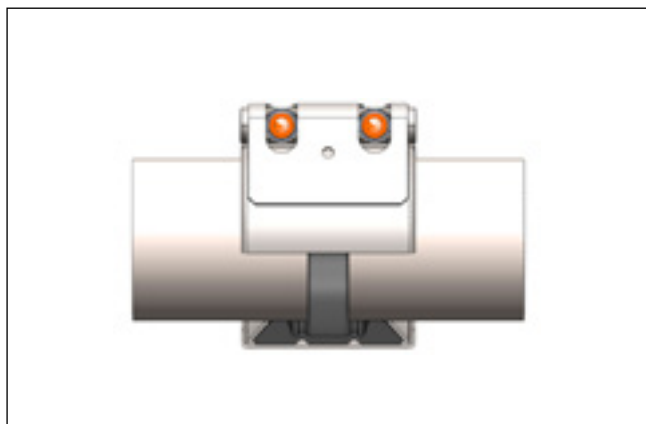

Axially restrained



### UNI-Flex / UNI-Rep

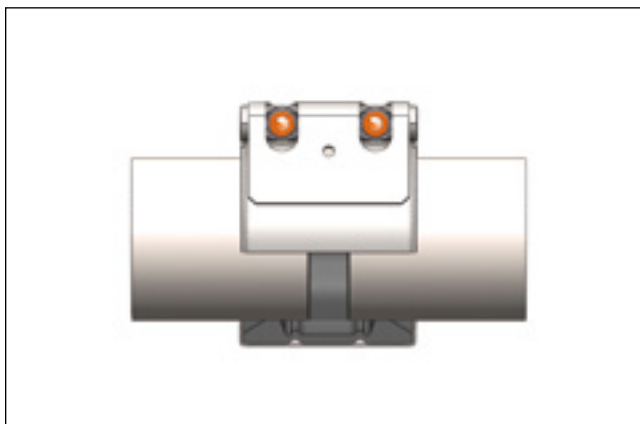

Axially flexible





# FEATURES AND UNIQUE PATENTED SOLUTIONS

## Patented seal with an integrated compensation solution

Once installed, the unique seal with coupling compensation beads makes the use of stainless steel inserts superfluous in most applications. This actively prevents potential corrosion problems.

There will be a progressive sealing effect due to the wedged shaped structure. This ensures a watertight sealing even at high pressures. Due to the solid seal design (without thin lips) robustness of the seal guarantees durability even under harsh conditions.

## Fire protection for your safety

For applications in which a fire protection must be guaranteed we meet the high demands of the shipbuilding industry according to ISO 19921/19922. These high requirements are ensured by our additional fire protective housing named UNI-Fire.

## Progressive anchoring with spherical profile

Internal pressure or axial forces cause tensile loads which is absorbed by the progressive anchoring ring.

The teeth show a spherical profile which ensures a high tip hardness and therefore a solid grip even on the toughest pipe surfaces. Especially important when it comes to thin walled stainless steel or cast iron pipes.

Thanks to the simultaneous cuts of the teeth a firm grip on other surfaces like metallic coated pipes is also guaranteed. This because the teeth penetrate the outer surface and anchor into the pipe wall.

### Patented seal



### Axially flexible



### Progressive anchoring



### Axially restrained



# COUNTLESS BENEFITS

## Universal use

- + Suitable for any pipe material
- + Compatible with any traditional jointing system
- + Joins pipes of similar or dissimilar materials
- + Leakproof joint for liquids, gas and solids
- + Quick and simple repairs of damaged pipes without service interruptions
- + Installation and sealing principle consistent throughout the range
- + Axially restrained or axially flexible (compensator) versions available

## Economical

- + Pre-assembled design ensures simple and quick installation
- + For use on plain end pipes without the need for costly pipe end preparation
- + Simply cut pipes to length, center coupling and tighten bolts
- + Suitable for thick and thin wall pipes
- + No expensive installation tools required

## Reliable

- + Stress free, flexible pipe joint
- + Compensates axial movement and angular deflection
- + Pressure resistant and leak tight even with inaccurate pipe assembly
- + Dampens water hammer, vibration and structure-borne noise

## Easy handling

- + Detachable and reusable
- + Maintenance free and trouble free
- + No time consuming alignment and fitting work
- + Easy installation technology
- + No heat or fire hazard: can be fitted in fire risk or confined spaces without special equipment


## Durable

- + Progressive sealing effect
- + Progressive anchoring effect
- + Corrosion resistant and temperature resistant
- + Good resistance to chemicals
- + Long service life


## Space saving

- + Compact design for space saving installation of pipes
- + Needs little space
- + Choice of mounting position
- + Lightweight
- + Increases the payload


## Universal use

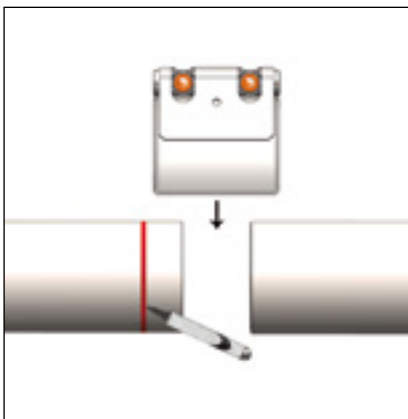

## Reliable

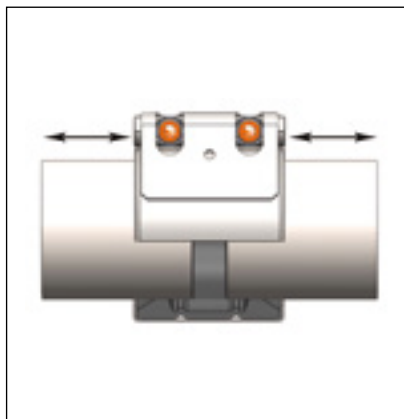

## Space saving

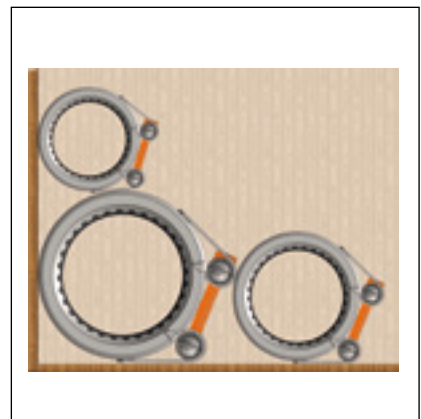



### Safe

- + Absorbs vibrations/oscillations
- + Reduces pressure surges
- + Reduces fatigue fractures
- + No fire or explosion hazard during installation
- + No cost for protective measures
- + Quadruple safety
- + Absorbs overloading through flexibility

### Damping


- + Increases the life of valves and systems
- + Compensates axial offset and angles
- + Coupler and compensator in one

### Long-lasting stress free

- + Corrosion resistant
- + Good resistance to temperature and chemicals
- + Low torque guarantees long service life

PN16; Ø 114,3 mm


UNI-Coupling Connection (2 x DN80) 8,7 kg

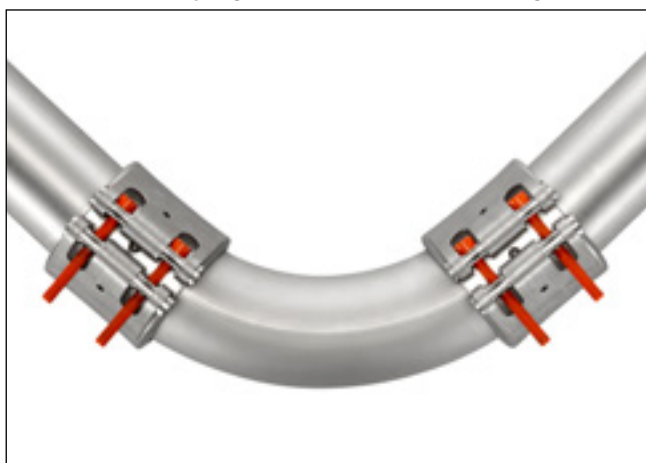


Flange Connection (2 x 2 pieces) 21,9 kg




### Safe

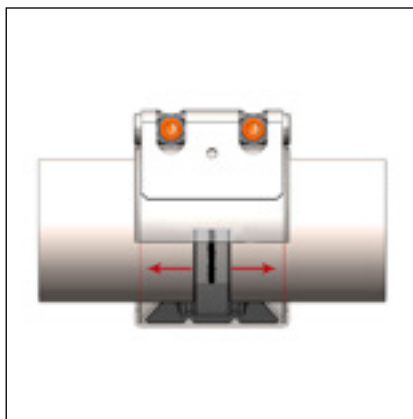

### Damping

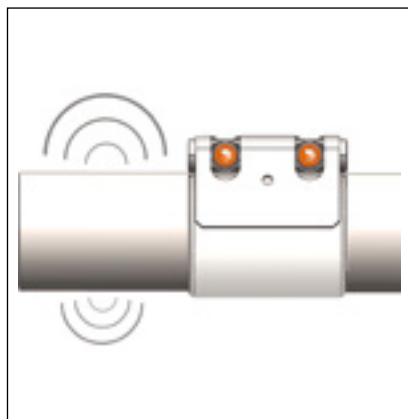

### Long lasting stress free

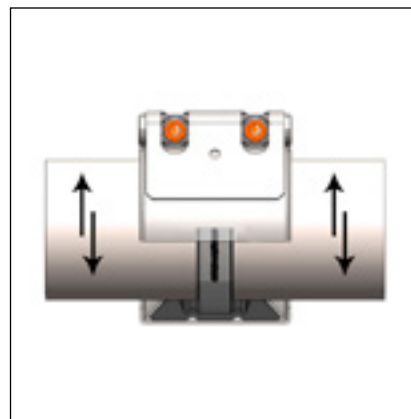

# APPROVALS


UNI-Coupling has several approvals, more approvals are pending. Certificates available on request.

DVGW



- + DIN EN 681
  - + DIN EN 682
  - + KTW 1.3.13
  - + W270
- ISO: 9001:2008 +  
ISO: 14001:2004 +

TÜV NORD

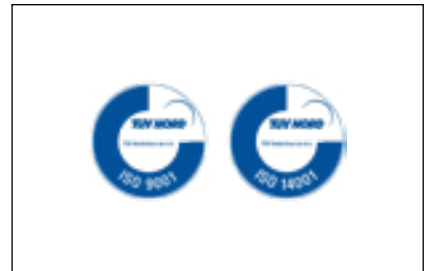

IACS



- + According to IACS Standard P2 Rules for piping design, construction and testing


Bureau Veritas



Class NK



Lloyd's Register

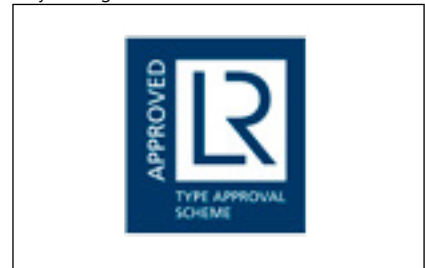

DET Norske Veritas / Germanischer Lloyd's




RINA Services



Korean Register



American Bureau of Shipping

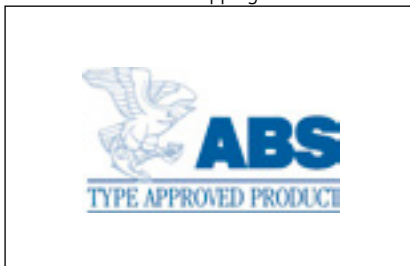

Russian Maritime Register of Shipping



China Classification Society



# IN-HOUSE TESTING FACILITIES

## Corrosion test

264 hours salt spray corrosion test. Tested according to ASTM B117, DIN-EN-ISO 9227.

- + Test results and detailed specifications available on request



## Fire test

Certified custom build fire test bench. Capable of testing under conditions up to 850°C and to a maximum of 24 bar pressure.

- + Test results and detailed specifications available on request



## Vacuum test

Custom build vacuum test capable of testing up to a vacuum of 0,1 bar absolute pressure.

- + Test results and detailed specifications available on request



## Youtube Channel

Check our UNI-Coupling Youtube Channel for Testing video's / Fitting instructions and more...

### Vibration test

Custom build vibration bench capable of testing diameters up to DN600 under 3 different frequencies and 3 different RPM's.

- + Test results and detailed specifications available on request



### Gasket test


- + No pressure on gasket centre
- + No strip insert
- + No corrosion



### Anchoring test

- + Results: hardening from: 1450 N/mm<sup>2</sup> (460 HV1) to 1850 N/mm<sup>2</sup> (565 HV1 = 53 HRC)
- + Ring 1 = UNI-Coupling (green), ring 2 (red) and 3 (blue) = competitors
- + Test results and detailed specifications available on request

Table 1. Results of the Micro Vickers hardness tests about the cross-sections of the rings

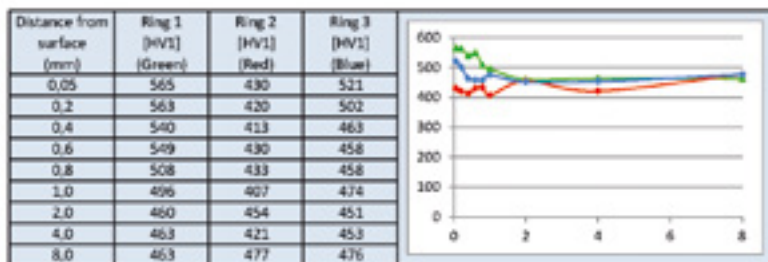

### Tightness and burstpressure test

Custom build pressure bench capable of testing all diameters, pipe materials and pressure ratings.

- + Test results and detailed specifications available on request



### Pullout test

Custom build pullout bench capable of testing diameters up to DN750 under maximum pullout force up to 50 tons.

- + Test results and detailed specifications available on request



# TYPE OVERVIEW

The UNI-Coupling is available in various types.

## UNI-Grip

- + To connect metal - metal
- + For restraint jointing
- + Patented wedge shaped seal
- + 2 grip rings for metal pipes
- + Stainless steel 1.4571 (W5) quality

## UNI-Plastgrip

- + To connect plastic - plastic
- + For restraint jointing
- + Patented wedge shaped seal
- + 2 grip rings for plastic pipes
- + Stainless steel 1.4571 (W5) quality

## UNI-Combigrp

- + To connect metal - plastic
- + For restraint jointing
- + Patented wedge shaped seal
- + 1 grip ring for metal pipes
- + 1 grip ring for plastic pipes
- + Stainless steel 1.4571 (W5) quality

## UNI-Flex

- + To connect metal - plastic
- + To connect metal - metal
- + To connect plastic - plastic
- + For flexible jointing
- + Patented wedge shaped seal
- + Stainless steel 1.4571 (W5) quality

## UNI-Rep

- + To connect metal - plastic
- + To connect metal - metal
- + To connect plastic - plastic
- + For flexible jointing
- + Patented wedge shaped seal
- + Clamp mechanism for repairing under pressure
- + Stainless steel 1.4571 (W5) quality

## UNI-Fire

- + Fire protective housing
- + Transforms regular couplings into fire protective couplings
- + Stainless steel 1.4571 (W5) quality

UNI-Grip



UNI-Plastgrip



UNI-Combigrp



UNI-Flex



UNI-Rep



UNI-Fire





# Technical Data

# TECHNICAL DATA OVERVIEW

Type	Ø (mm)	Width (mm)	Pressure PN	Pressure WP
 <b>UNI-Grip</b>	21 - 172	45 - 110	16	32 to 70
	188 - 745	138 - 146	2.5 to 16	6 to 25
 <b>UNI-Plastgrip</b>	39 - 172	60 - 110	10	16
	175 - 640	140 - 146	2.5 to 10	6 to 16
 <b>UNI-Combigrip</b>	39 - 172	60 - 110	10	16
	175 - 640	140 - 146	2.5 to 10	6 to 16
 <b>UNI-Flex</b>	21 - 172	45 - 110	16	25
	188 - 2090 Bigger on request	140 - 206 280 - 420	2.5 to 16	6 to 25
 <b>UNI-Rep</b>	36 - 172	60 - 110	16	25
	188 - 745 Bigger on request	140 - 206 280 - 420	6 to 16	10 to 25

Wider range	OD (mm)	Number of couplers	Material quality	Material thickness
UNI-Coupling	21 - 47.5 47.5 - 172	7 15	standard W5 standard W5	to 5 mm thickness to 5 mm thickness

Connecting	Metal - Metal	Plastic - Plastic	Metal - Plastic	Restrained / Flexible
UNI-Grip	X			restrained
UNI-Plastgrip		X		restrained
UNI-Combigrp			X	restrained
UNI-Flex	X	X	X	flexible
UNI-Rep	X	X	X	flexible

Sealing material	EPDM > 21 - 172 mm	EPDM > 172 mm	NBR	Viton
Temperature range	-30 °C - +125 °C	-30 °C - +80 °C	-20 °C - +80 °C	-20 °C - +180 °C
Medium	drinking water, wastewater, compressed air, alcohol and solids	drinking water, wastewater, compressed air, alcohol and solids	water, gas, oil, fuel, and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)

Quality	Housing	Lock bars	Bolts	Anchoring
W5	1.4571 / 316 Ti	1.4571 / 316 Ti	A4 – 80 / 316 Ti	1.4404 / 316 L & 1.4310 / 301

# FITTING INSTRUCTIONS UNI-GRIP / UNI-PLASTGRIP / UNI-COMBIGRIP / UNI-FLEX

Fitting instructions			
Installatie-instructie Montageanleitung Instructions de montage		Instrucciones de montaje Инструкции по установке Instrukcije za montažu	
<b>UNI-Grip (G)</b>  metal/metal 	<b>UNI-Plastgrip (PG)</b>  plastic/plastic 	<b>UNI-Combigrip (CG)</b>  plastic/metal 	<b>UNI-Flex (F)</b>  all 

**UNICOUPLING**

DIN 86128-1  
86128-2

The contents of these installation instructions are not legally binding. UNI-Coupling B.V. makes no claim, promise or guarantee about the completeness, accuracy, recency or adequacy of information and is not responsible for misprints, out-of-date information, or errors.

De inhoud van deze installatie-instructies zijn niet juridisch bindend. UNI-Coupling B.V. maakt geen aanspraak, belofte of garantie over de volledigheid, nauwkeurigheid, recentheid of geschiktheid van de informatie en is niet verantwoordelijk voor drukfouten, verlopen informatie, of fouten.

Der Inhalt dieser Einbauanleitung ist nicht rechtsverbindlich. UNI-Coupling B.V. erhebt nicht den Anspruch und übernimmt keine Garantie/Gewährleistung für die, auf Vollständigkeit, Richtigkeit, Aktualität und Eignung der Informationen und ist nicht für Druckfehler verantwortlich.

Le contenu de ces instructions d'installation ne sont pas juridiquement contraignant. UNI-Coupling B.V. n'a pas la prétention, promesse d'une garantie quant à l'exhaustivité, l'exactitude, la récence ou la pertinence des informations et ne sont pas responsables de toute erreur typographique, de l'information sur-of-date, ou erreurs.

El contenido de estas instrucciones de instalación no es jurídicamente vinculante. UNI-Coupling B.V. no declara, promete o garantiza la integridad, exactitud, actualidad o suficiencia de la información y no es responsable de errores de imprenta, información anticuada, o equivocaciones.

Содержащаяся в настоящей брошюре информация носит рекомендательно-информационный характер и не является законодательно-нормативной. UNI-Coupling B.V. оставляет за собой право на внесение изменений в содержащуюся информацию в случаях модернизации или улучшения представленной в каталоге продукции без предварительного уведомления кого-либо и не несёт ответственности за использование устаревших данных или ошибки, возникшие в результате опечаток или неточности прочтения. Все права на представленную в каталоге информацию защищены, включая копирование самого каталога или любой его части.

Sadržaj ovih uputa za ugradnju-montažu nisu pravno obvezujuće. UNI-Coupling B.V. zadržava pravo izmjene podataka sadržanih u ovoj brošuri u slučaju modernizacije i poboljšanja bez prethodne najave. UNI-Coupling B.V. nije nikome odgovorna za korištenje zastarjelih podataka ili tipografske greške i netačnosti.



## Youtube Channel

Check our UNI-Coupling Youtube Channel for Testing video's / Fitting instructions and more...

# INSTALLATION CONDITIONS

## 1. Installation conditions

- Installatievoorwaarden
- Einbaubedingungen
- Conditions d'installation

- Condiciones de instalación
- Условия установки
- Uslovi (uvjeti) ugradnje

1.

OD (mm)	EPDM For drinking water, waste water, air and solids	NBR For water, gases, oils, fuels and other hydrocarbons
≤172	-30°C - +125°C	-20°C - +80°C
≥180	-20°C - +80°C	-20°C - +80°C

### EPDM

Voor drinkwater, afvalwater, lucht en vaste stoffen.  
Für Trinkwasser, Abwasser, Luft und Feststoffe.  
Pour l'eau potable, eau usée, de l'air et des solides.  
Para agua potable, agua residual, aire y sólidos.  
Потриман вода, сточна вода, повітря та тверді речовини.  
Pitka voda, otpadne vode, vazduh i tvrde čestice.

### NBR

Voor water, gas, olie, brandstoffen en andere koolwaterstoffen.  
Für Wasser, Gase, Öl, Kraftstoff und andere Kohlenwasserstoffe.  
Pour l'eau, gaz, huiles, carburants et autres hydrocarbures.  
Para agua, gases, aceites, combustibles y otros hidrocarburos.  
Вода, газ, нефть, топливо и другие углеводороды.  
voda, plin, nafta, gorivo i ostali ugljikovodici.

2.

OD (mm)	C <sub>max</sub> (mm)
21 - 35	10
36 - 52	15
53 - 63	25
64 - 129	30
130 - 2000	40

3.

OD (mm)	Q
21 - 64	5'
64 - 223	4'
223 - 613	2'
613 - ∞	1'

4.

OD (mm)	Q
21 - 64	5'
64 - 223	4'
223 - 613	2'
613 - ∞	1'

5.

OD (mm)	Q
21 - 64	5'
64 - 223	4'
223 - 613	2'
613 - ∞	1'

6.

OD (mm)	Q
21 - 64	5'
64 - 223	4'
223 - 613	2'
613 - ∞	1'

7.

OD (mm)	Q
21 - 64	5'
64 - 223	4'
223 - 613	2'
613 - ∞	1'


8.

OD (mm)	Q
21 - 64	5'
64 - 223	4'
223 - 613	2'
613 - ∞	1'

# PREPARATIONS AND FITTING


## 2. Preparations

- Voorbereidingen
- Preparativos
- Vorbereitungen
- Подготовка
- Préparations
- Priprema

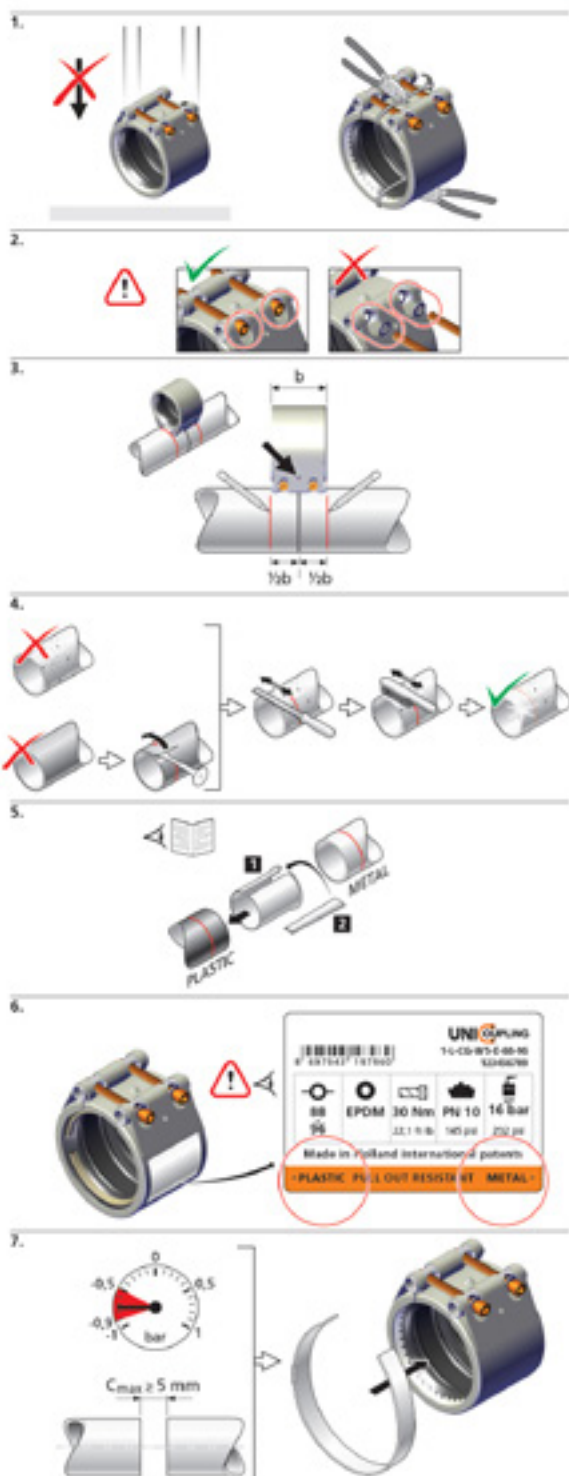

## 3. Fit the coupling

- Plaats de koppeling
- Montieren Sie die Kupplung
- Monter l'accouplement
- Montaje del acoplamiento
- Установите муфту
- Postavljanje spojnice

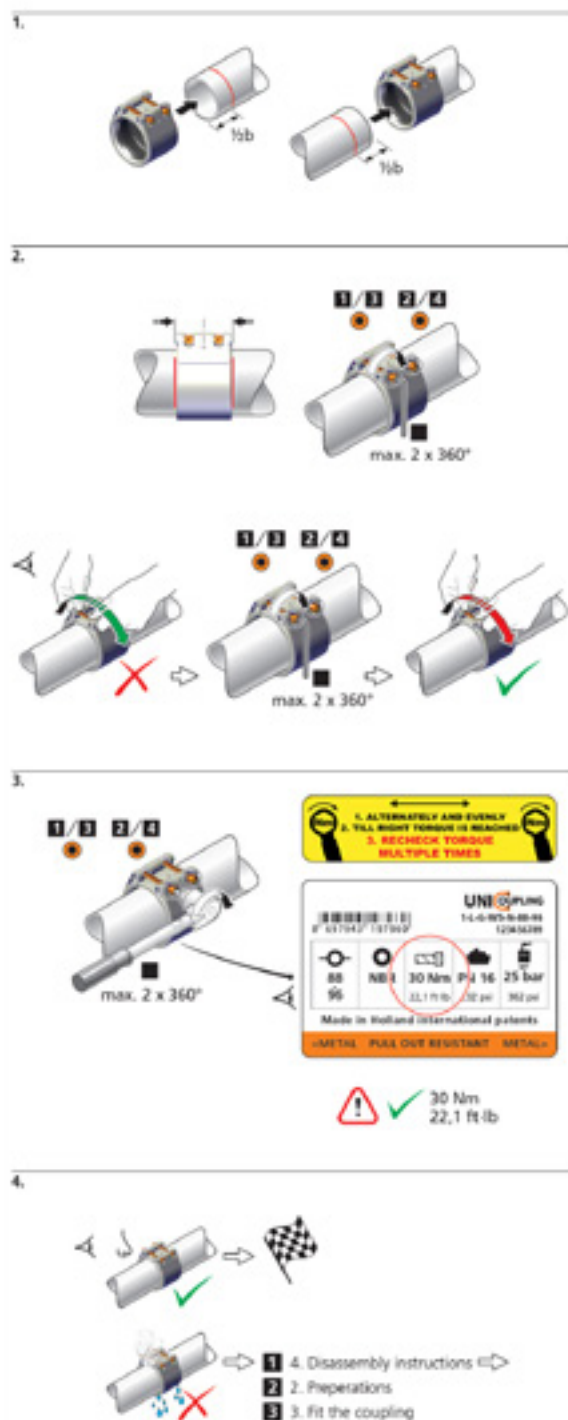




# DISASSEMBLY INSTRUCTIONS

## 4. Disassembly instructions


- Demontage instructie
- Demontageanleitung
- Instructions de démontage

- Instrucciones para el desmontaje
- Демонтажные инструкции
- Upute za demontažu


1.

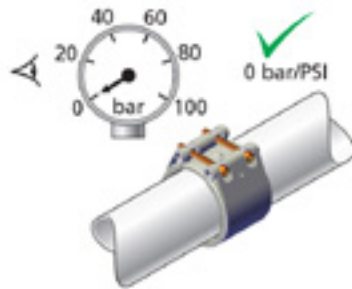


2.

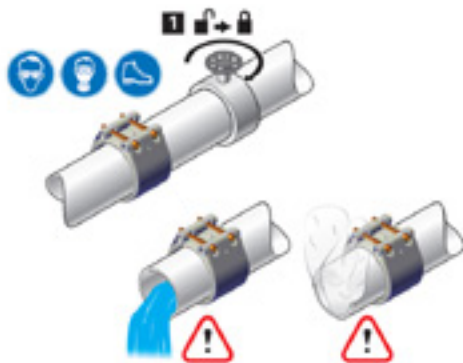


3.

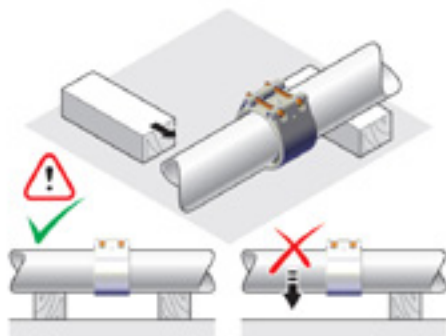


4.

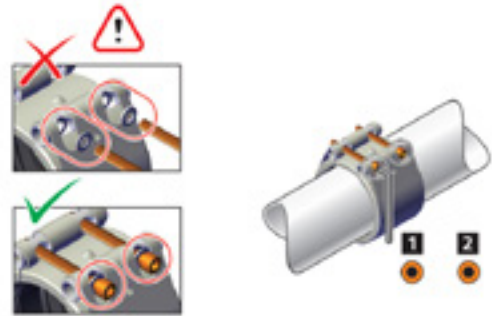


5.

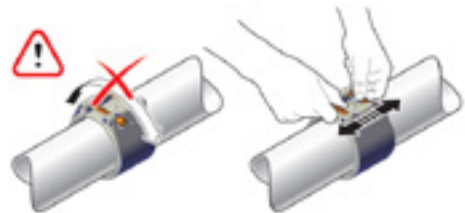

6.

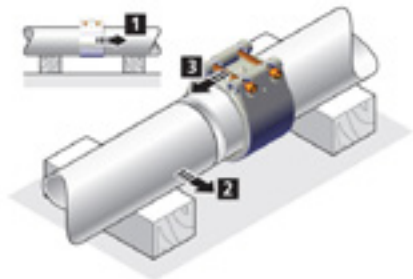

7.

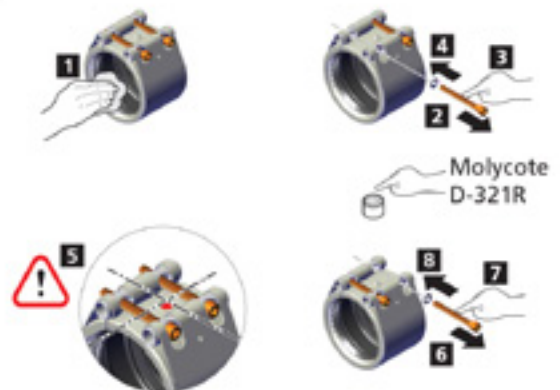

# FITTING INSTRUCTIONS UNI-GRIP / UNI-PLASTGRIP / UNI-COMBIGRIP / UNI-FLEX

1.



2.



3.



4.




5.



6.



7.

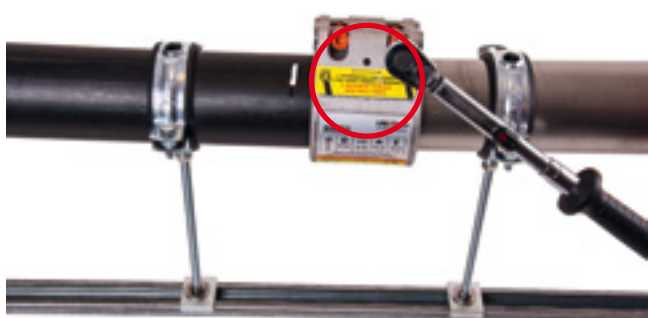

8.



# FITTING INSTRUCTIONS UNI-REP

1.



2.




3.



4.



5.

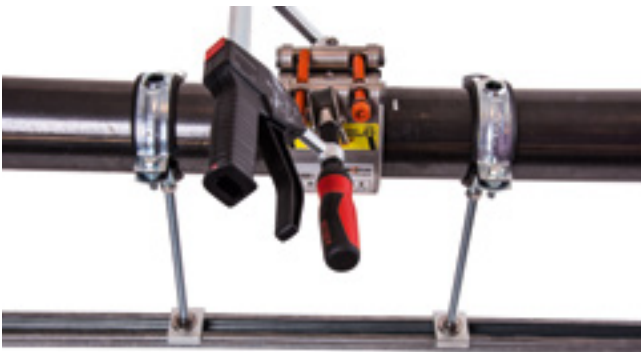


6.



7.



8.

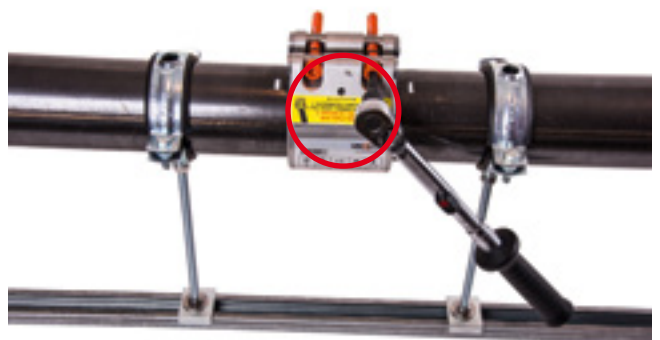

# FITTING INSTRUCTIONS INSERT

## Economy Insert

- + Suitable for PE, PVC, PP and PB plastic pipes
- + Stainless steel 1.4310 (W2) quality
- + Insert without range
- + Other dimensions on request
- + Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116)

1.



2.



3.



## Insert with wedge

- + Suitable for PE, PVC, PP or PB plastic pipes
- + Stainless steel 1.4310 (W2) quality
- + Insert with range
- + Other dimensions on request
- + Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 117)

1.



2.











3.



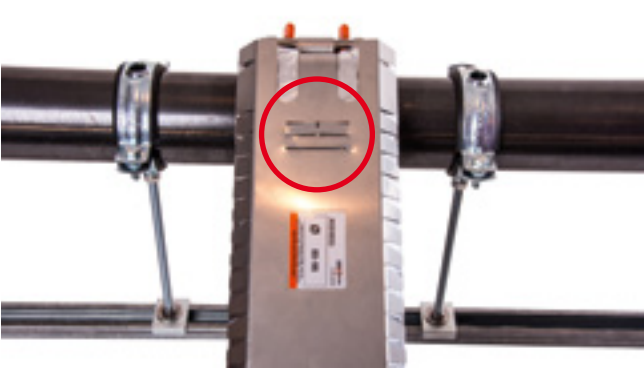

# FITTING INSTRUCTIONS UNI-FIRE

1. 
2. 
3. 
4. 
5. 
6. 
7. 
8. 

# PIPE DIMENSIONS AND MINIMUM PIPE WALL THICKNESS AT NOMINAL PRESSURE PN

Pipe Ø		Nominal Ø		Minimum pipe wall thickness			
Metric (mm)	Imperial (inch)	Metric (dn)	Imperial (nom)	Stainless steel		CuNi10Fe (DIN) / CuNi10Mn1Fe (ISO)	
				Metric (mm)	Imperial (inch)	Metric (mm)	Imperial (inch)
26.9	1.059	20	¾	1.5	0.059	1.5	0.059
30.0	1.181	25	1.2	1.5	0.059	1.5	0.059
33.7	1.327	25	1	1.5	0.059	2.0	0.079
38.0	1.496	32	1.5	1.5	0.059	2.0	0.079
42.4	1.669	32	1 ¼	1.5	0.059	2.0	0.079
44.5	1.752	40	1.75	1.5	0.059	2.0	0.079
48.3	1.902	40	1 ½	1.5	0.059	2.0	0.079
54.0	2.126	50	2.125	1.5	0.059	2.0	0.079
57.0	2.244	50	2.25	1.5	0.059	2.0	0.079
60.3	2.374	50	2	1.5	0.059	2.0	0.079
66.6	2.622	65	2 ½	2.0	0.079	2.0	0.079
70.0	2.756	65	2 ½	2.0	0.079	2.0	0.079
73.0	2.874	65	2 ½	2.0	0.079	2.0	0.079
76.1	(3.000)	65		2.0	0.079	2.0	0.079
79.5	3.130	65	3	2.0	0.079	2.0	0.079
84.0	3.307	80	3.3	2.0	0.079	2.0	0.079
88.9	3.500	80	3	2.0	0.079	2.0	0.079
100.6	3.961	80	(3)	2.0	0.079	2.3	0.091
101.6	(4.000)	90	(3 ½)	2.0	0.079	2.3	0.091
104.0	4.094	100	4.1	2.0	0.079	2.3	0.091
104.8	4.126	100	(4)	2.0	0.079	2.3	0.091
108.0	4.252	100	4 ¼	2.0	0.079	2.3	0.091
114.3	4.500	100	4	2.0	0.079	2.3	0.091
127.0	5.000	100	4 ½	2.6	0.102	3.0	0.118
129.0	5.079	125	5	2.6	0.102	3.0	0.118
130.2	5.126	125	(5)	2.6	0.102	3.0	0.118
* 131.0	5.157			3.0	0.118		
133.0	5.236	125	5 ¼	2.6	0.102	3.0	0.118
139.7	(5.500)	125	(5 ½)	2.6	0.102	3.0	0.118
141.3	5.563	125	5	2.6	0.102	3.0	0.118
154.0	6.063	150	6.1	2.6	0.102	3.0	0.118
* 155.0	6.102			2.5	0.098		
159.0	6.260	150	6 ¼	2.6	0.102	3.0	0.118
168.3	6.626	150	6	2.6	0.102	3.5	0.138
193.7	7.626	200	7.6	3.0	0.118	3.5	0.138
* 206.0	8.110			3.0	0.118		
219.1	8.626	200	8	3.0	0.118	3.5	0.138
244.5	9.626	225	9	on request	on request	4.5	0.177
* 256.0	10.079			on request	on request		
267.0	10.512	250	10.5	on request	on request	4.5	0.177
273.0	10.748	250	10	on request	on request	5.0	0.197
* 306.0	12.047			on request	on request		
323.9	12.752	300	12	on request	on request	5.5	0.217
355.6	14.000	350	14	on request	on request	6.0	0.236
406.4	16.000	400	16	on request	on request	8.0	0.315
457.2	18.000	450	18	on request	on request	9.0	0.354
508.0	20.000	500	20	on request	on request	10.0	0.394
558.8	22.000	550	22	on request	on request	10.0	0.394
609.6	24.000	600	24	on request	on request	12.0	0.472

Thinner walls are possible at lower pressures; please contact us for more information.  
 \* Standard pipe dimension for stainless steel (outer diameter related to the wall thickness)



# INSTALLATION TIME

The installation time includes:

- + Marking of half the coupling width on both pipe ends
- + Fitting the coupling over pipe ends and correct alignment
- + Tightening the bolts with a torque wrench

Pipe Ø		Nominal Ø		Installation time per coupling Time (min)
Metric (mm)	Imperial (inch)	Metric (dn)	Imperial (nom)	
26.9	1.050	20	3/4	2
30	1.180	25	1.2	2
33.7	1.325	25	1	2
38	1.495	32	1.5	2
42.4	1.670	32	1 1/4	2
44.5	1.750	40	1.75	2
48.3	1.900	40	1 1/2	2
54	2.125	50	2.125	3
57	2.245	50	2.25	3
60.3	2.375	50	2	3
66.6	2.625	65	2 1/2	4
73	2.875	65	2 1/2	4
76.1	(3.000)	65	3	4
79.5	3.125	65	3	4
84	3.305	80	3.3	4
88.9	3.500	80	3	4
100.6	3.960	80	(3)	5
101.6	(4.000)	90	(3 1/2)	5
104	4.095	100	4.1	5
104.8	4.125	100	(4)	5
108	4.250	100	4 1/4	5
114.3	4.500	100	4	5
127	5.000	100	4 1/2	6
129	5.080	125	5	6
130.2	5.125	125	(5)	6
133	5.235	125	5 1/4	6
139.7	(5.500)	125	(5 1/2)	6
141.3	5.565	125	5	6
154	6.065	150	6.1	7
159	6.260	150	6 1/4	7
168.3	6.625	150	6	7
219.1	8.625	200	8	9
244.5	9.625	225	9	10
267	10.510	250	10.5	10
273	10.750	250	10	10
323.9	12.750	300	12	12
355.6	14.000	350	14	12
406.4	16.000	400	16	12
457.2	18.000	450	18	12
508	20.000	500	20	12
558.8	22.000	550	22	12
609.6	24.000	600	24	12

# ACCESSORIES

## Strip inserts

Strip inserts protect the sealing sleeve against mechanical or chemical damage in the pipe end area.

Strip inserts are only required for:

- + External pressure (e.g. underwater pipeline)
- + Vacuum  $\geq 0.5$  bar absolute pressure (e.g. suction line)
- + Swelling of the rubber caused by contact with chemicals

Subsequent installation of strip inserts for all types of couplings is possible. Strip insert are made of 316 Ti (1.4571) quality steel and capable of handling high temperature, vacuum and external pressure.



Strip inserts are only required for above mentioned applications!

## Fitting plier

For convenient assembly of UNI-Rep couplings we recommend using a fitting plier. The plier uses the bores in the housing to close the coupling which enables you to manually tighten the bolts. For bigger diameters (>300 mm) use a fitting belt.




## Torque wrench

Always assemble UNI-Couplings with a torque wrench. The correct torque is indicated on the housing label of each UNI-Coupling. While using a torque wrench you ensure that the UNI-Coupling is not overstressed.



# ANGULAR DEFLECTION

UNI-Couplings cover angular deflection of pipes up to  $2^\circ$  ( $4^\circ$ ) in any direction.

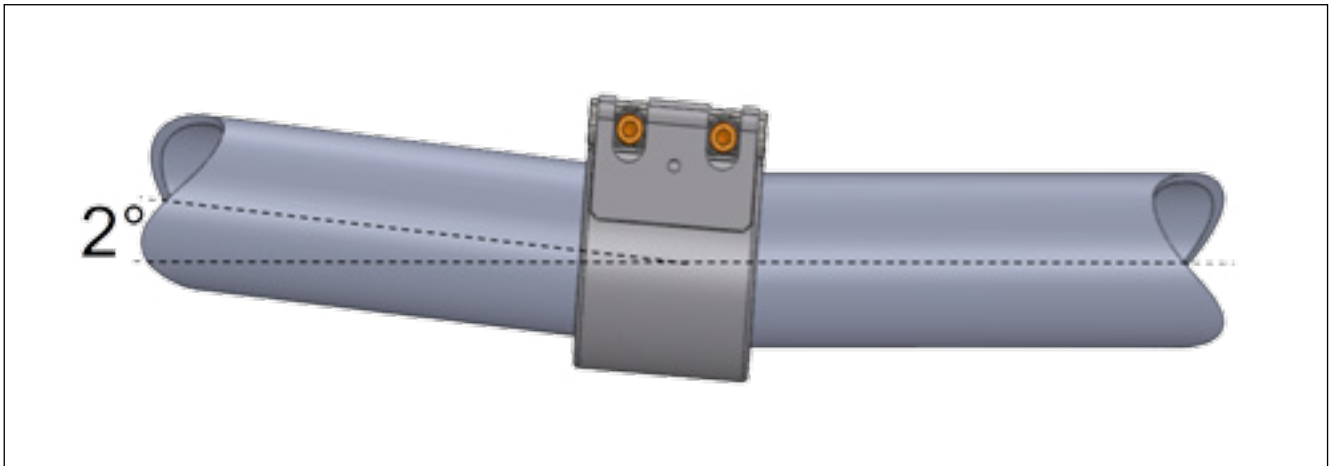


The  $2^\circ$  angular deflection corresponds to 35 mm per meter of pipe length.

The installation is very easy and there is no need for costly pipe alignment.

It is possible to fit the pipe with angular deflection and to use the joint for dynamic angular movement under working conditions after installing the pipe system.

**Example:** Ground settling

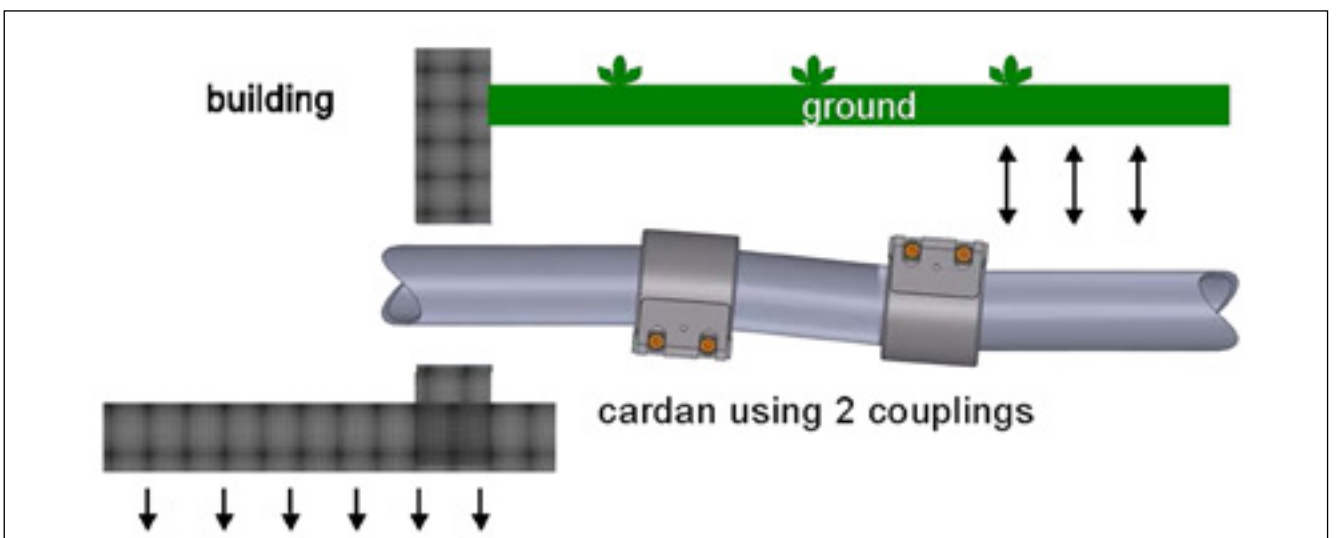


**Note:** Pipe end gap C max must always be kept.

# AXIAL MISALIGNMENT

UNI-Couplings generally allow misalignment of the pipe axis. However, we recommend avoiding misalignment wherever possible or absorbing it either with an angularity of max 2° or by using an intermediate piece.

Since "zero misalignment" is hard to realize, a minimal misalignment is tolerated. The following rule serves to explain the limits of what is tolerable, with the aim of keeping axial misalignment as small as possible.


**For fixed pipe ends, a misalignment of up to 1% (max. 3 mm) of corresponding pipe OD can be tolerated without any restrictions. It does not affect the correct fitting of the UNI-Coupling.**

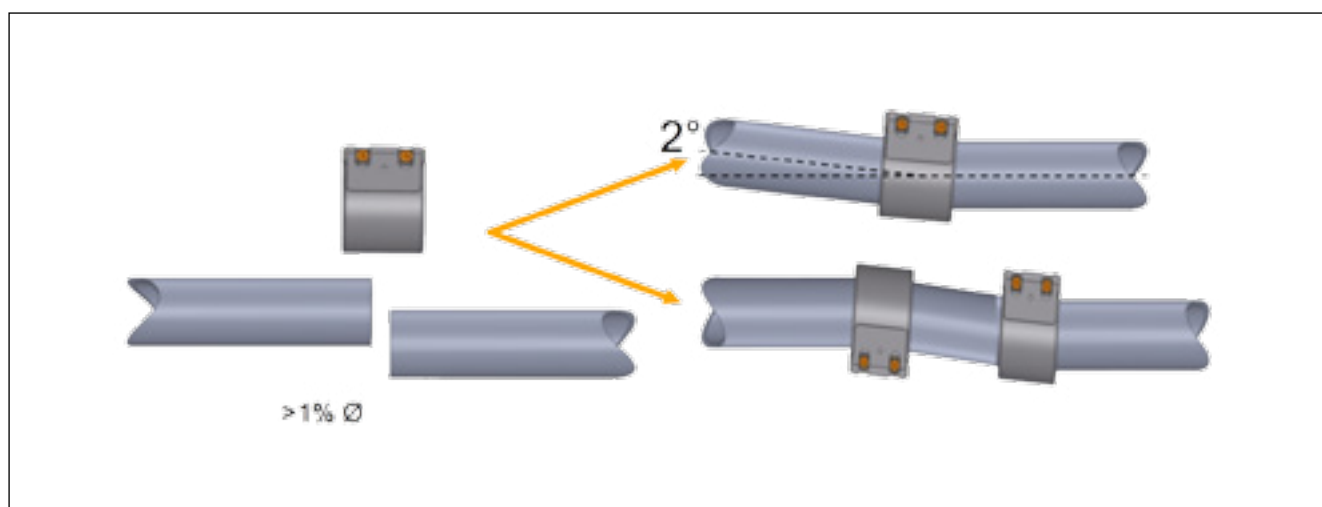

Where the pipeline guides are sufficiently spaced from the pipe end, the butt ends can be rectified by hand with low force, approx. 500N. The remaining axial misalignment after tightening the lock bolts is minimal. For such an application a larger misalignment prior to connecting can be permitted, keeping the following rule in mind:

**A misalignment of up to 1% in the fitted position has no negative influence on the function of UNI-Flex and UNI-Rep pipe couplings and is therefore tolerable up to pipe OD of 300 mm.**

Under such conditions a slight sloping of the coupling on the pipe ends has to be expected.

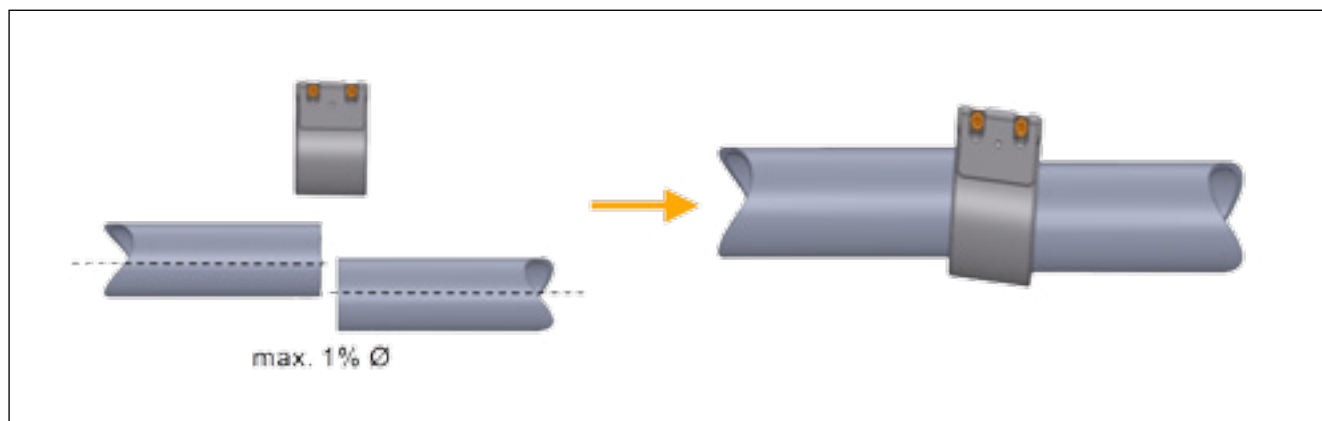


# RETROFITTING PIPE SECTIONS AND FITTINGS

Thanks to their large clearance and allowable fitting gap as well as the wide tolerance range, UNI-Couplings are predestined as an ideal construction element for retrofitting pipe sections and fittings during repair work or for changes in the pipeline direction.




**UNI-Coupling pipe couplings do not absorb bending or torsion forces. Pressure lines must be supported, anchored and guided.**


Pipe section for existing or new pipelines.

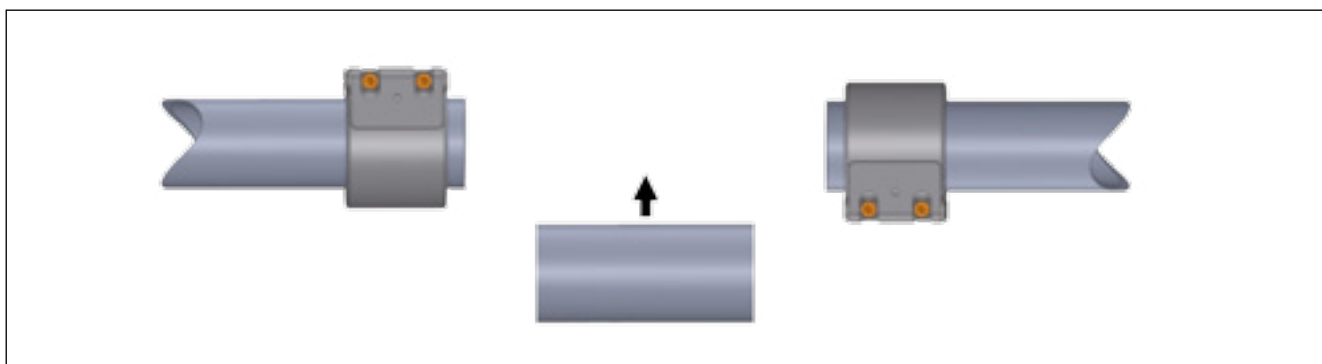

Fitting (T), position and direction of the branch are freely selectable.

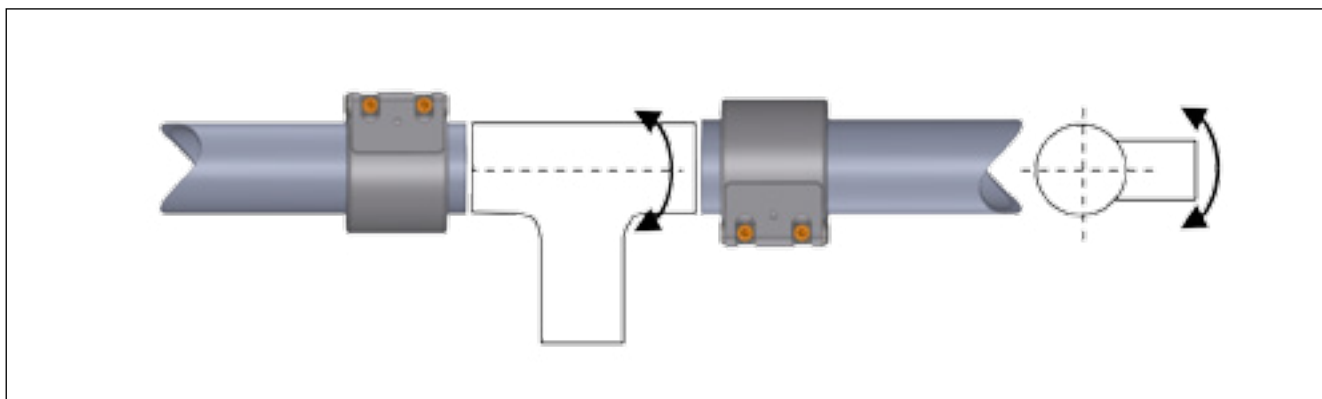

Valve with plain ends, rotatable to any position.

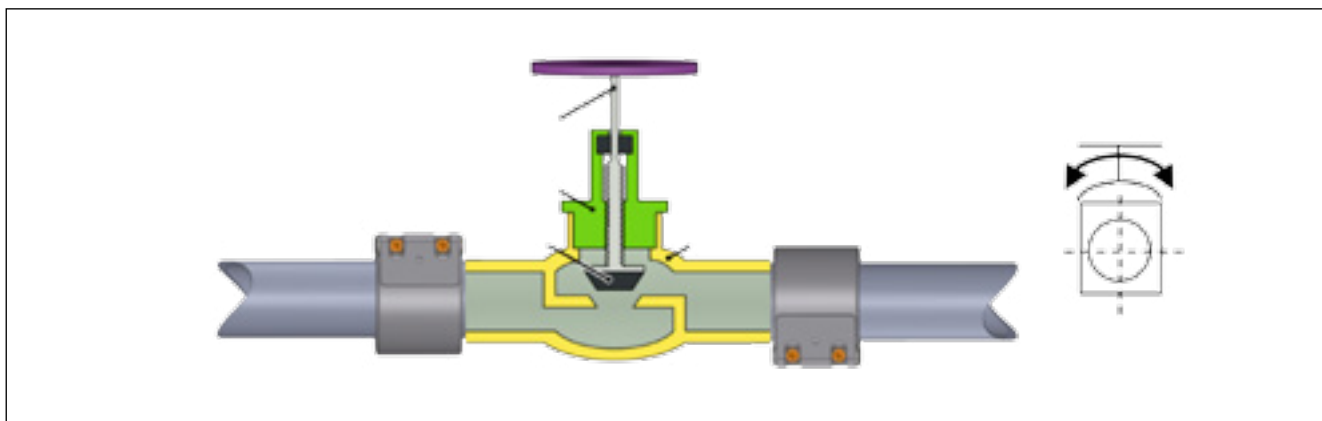

# AXIAL MOVEMENT / CHANGE IN LENGTH


Temperature changes in pipeline systems cause axial movement and tensile or pressure stress, which must be compensated by adequate countermeasures.



**UNI-Coupling pipe couplings do not absorb bending or torsion forces. Pressure lines must be supported, anchored and guided.**


UNI-Flex and UNI-Rep pipe couplings are able to compensate axial movement of straight pipe sections, up to 20 mm depending on the size of coupling.

- + compensation of axial movement
- + no abrasion on the sealing sleeve
- + escaping space for rubber expansion under temperature
- + stress-free pipeline without additional means (see below)

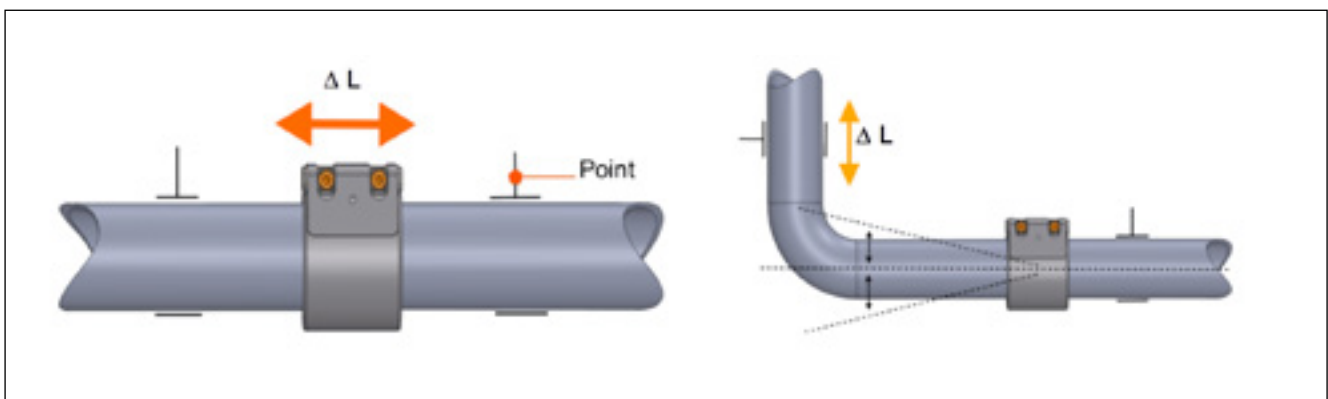

**Note:** Pipe end gap Cmax. must always be kept.

Larger axial movements need compensation, such as traditional compensators.

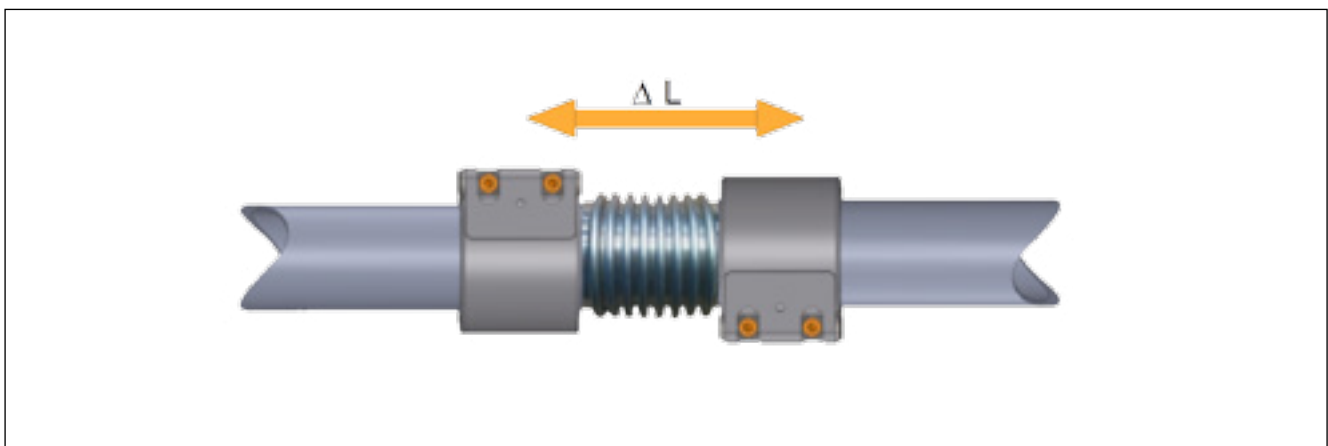




### Anchor points and guides with axial movement

Clever fastening of pipe sections which are exposed to axial movement due to temperature influences can be divided into 'movement units' and joined very economically with UNI-Flex and UNI-Rep pipe couplings as compensators.




**UNI-Coupling pipe couplings do not absorb bending or torsion forces. Pressure lines must be supported, anchored and guided.**


The distance between 2 anchor points forms a movement unit.

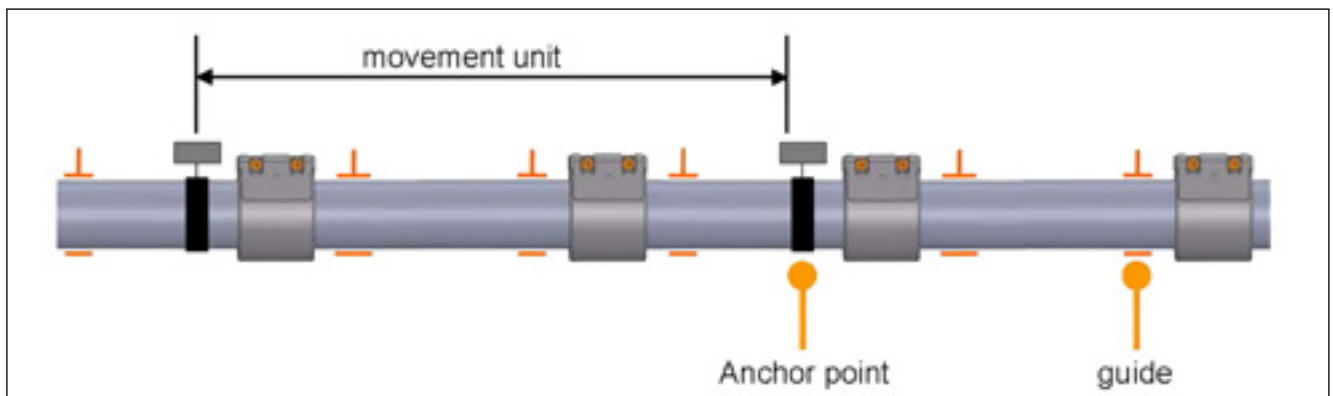

The movement between the 2 anchor points may not exceed the permissible value given for one joint.

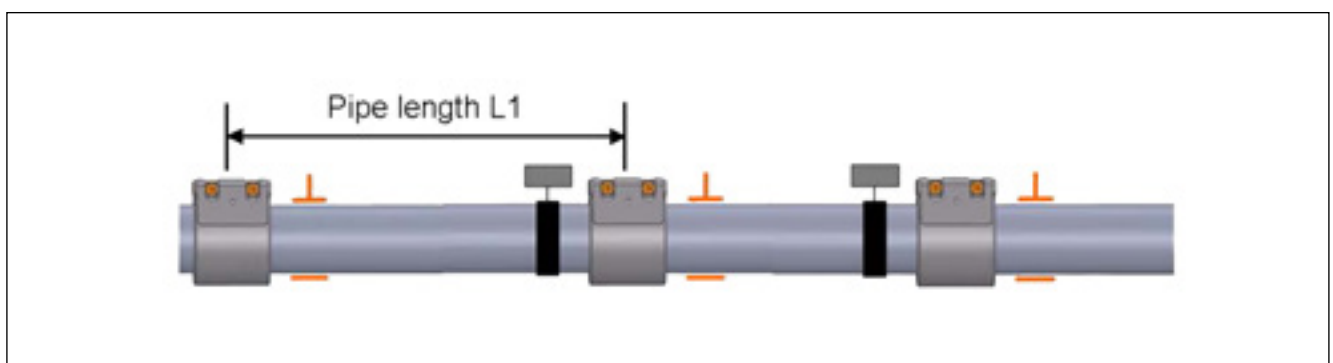

Depending on the value of axial movement, every second anchor point can be replaced with a guide.

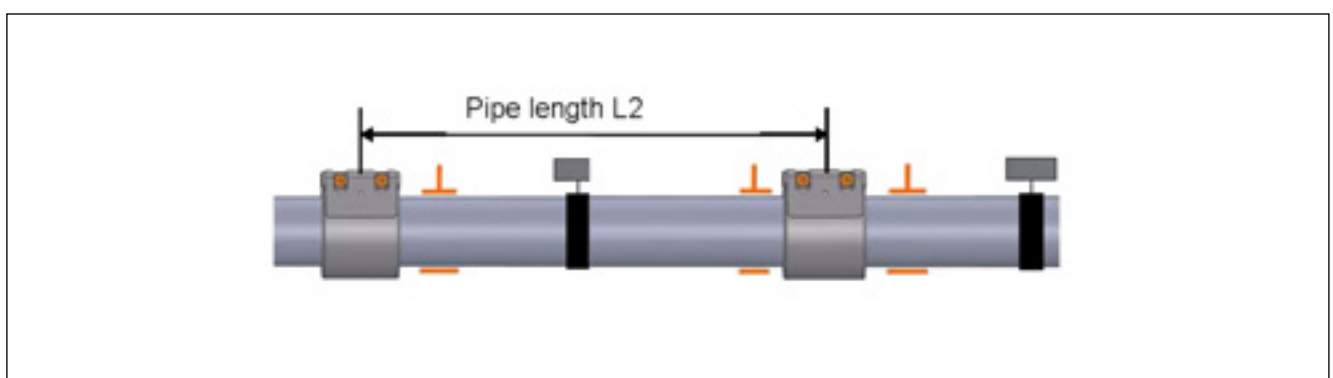


# BENDING / TORSION




UNI-Coupling pipe couplings do not absorb bending or torsion forces. Pressure lines must be supported, anchored and guided.

## Bending

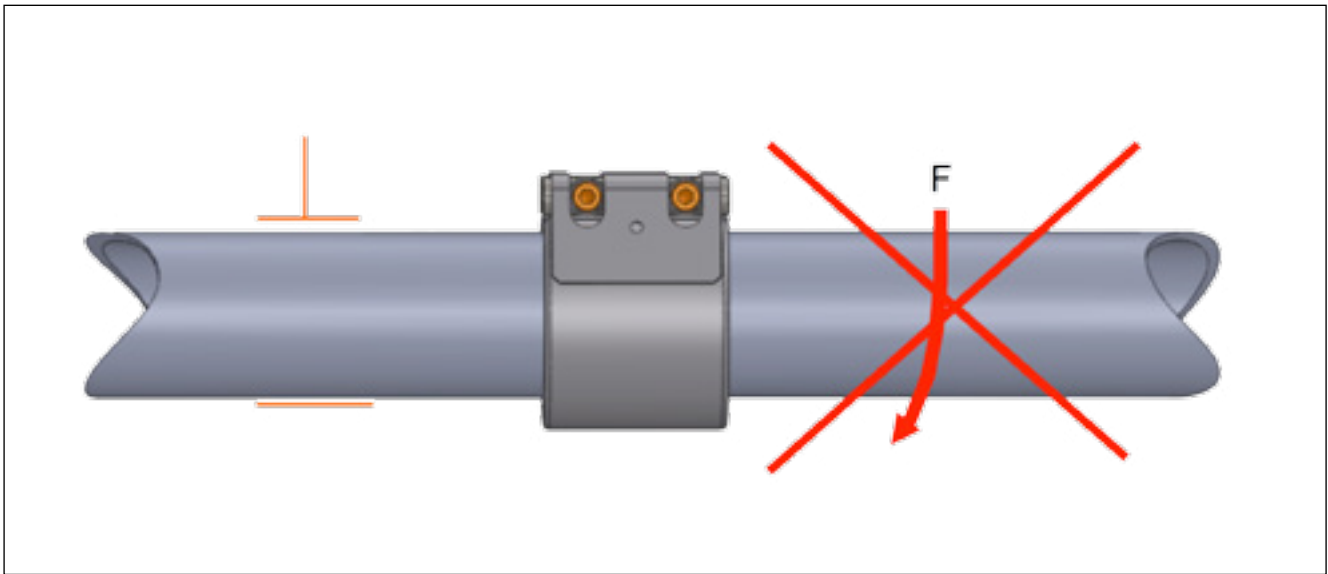


## Torsion

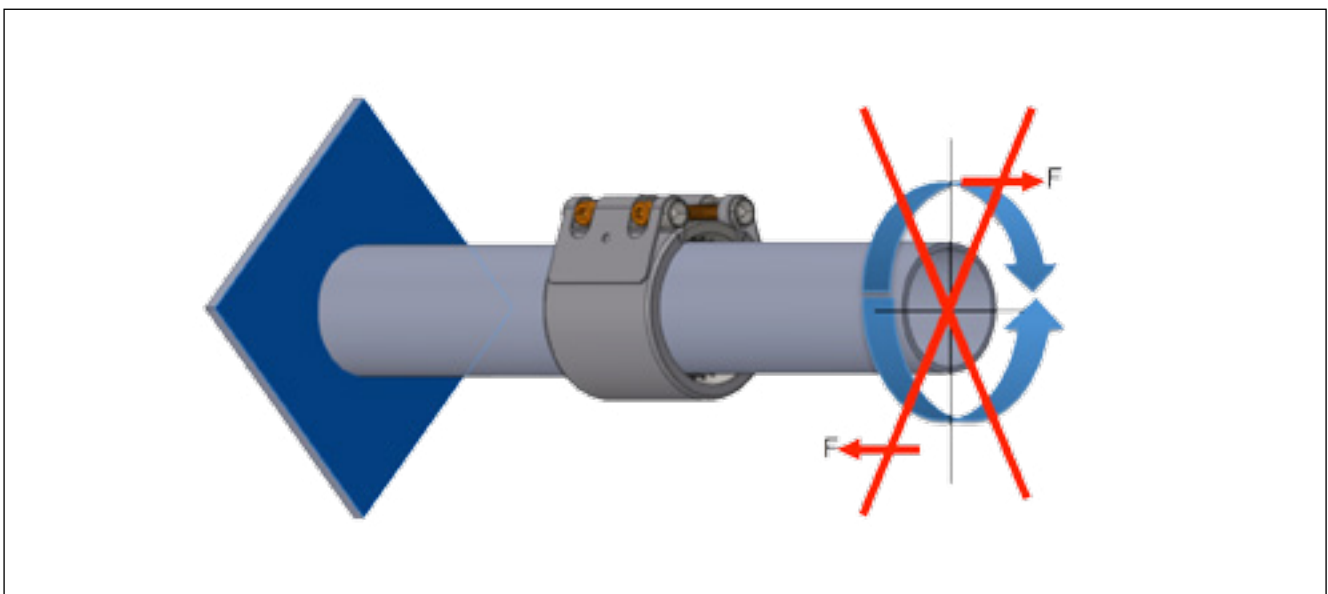

# UNDERGROUND PIPELINES




UNI-Coupling pipe couplings do not absorb axial forces. Structural measures for buried pipelines are required in order to absorb axial forces (e.g. lean concrete abutment).

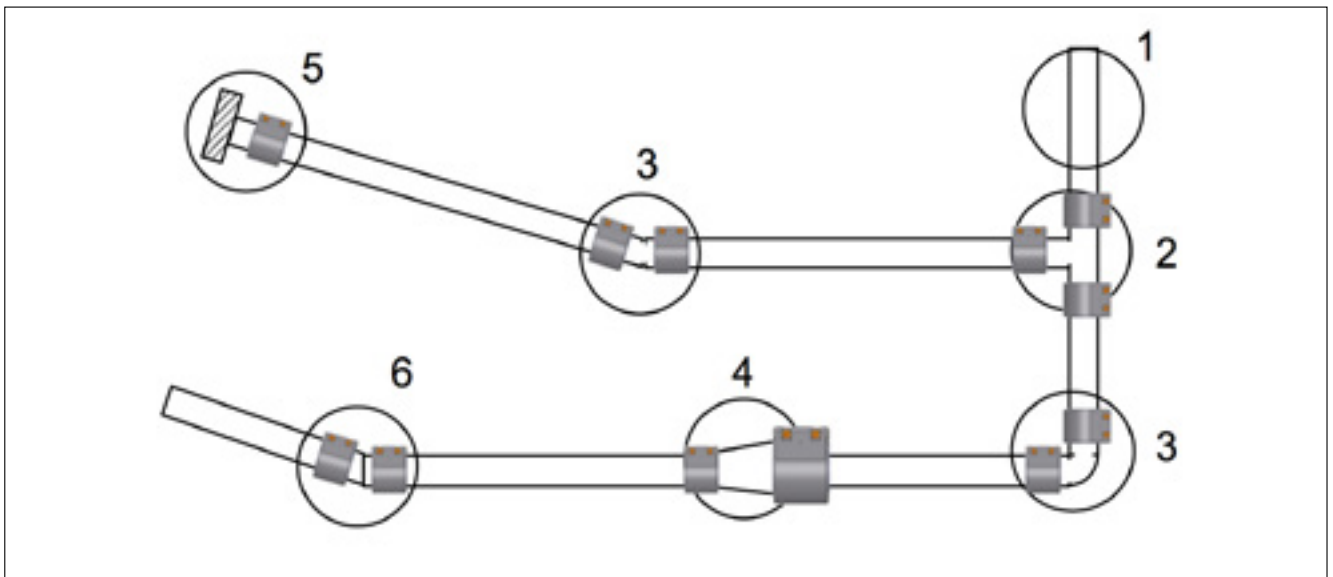


1 Sufficient back fill weight to prevent side thrust or buckling




2 Tees  
(e. g. concrete thrust blocks)

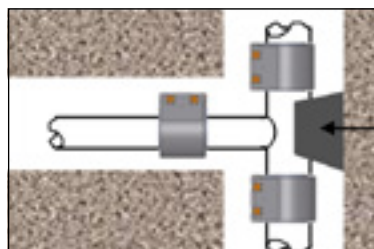


3 Bends  
direction changes

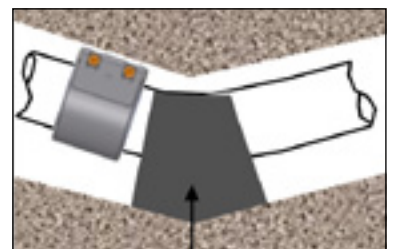


4 OD reductions

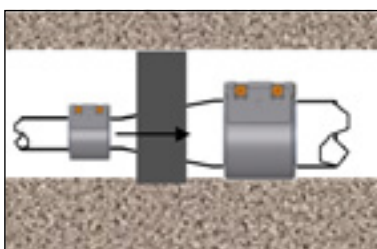

5 Blank ends

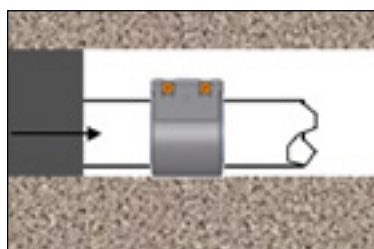

6 Inclination changes

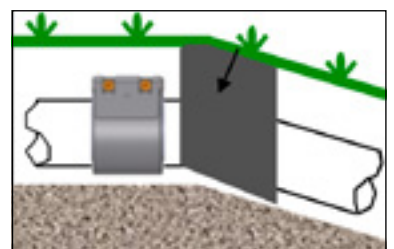

The arrows indicate the counterforce of the abutment.

# FREELY INSTALLED PIPELINES




UNI-Coupling pipe couplings do not absorb axial forces.


**Important:** Pressure lines must be supported, anchored and guided.  
Depending on the installation situation, supports have to be changed to anchor points.

**Guideline:** One anchor point and at least one guide point per pipe section!

Structural measures for freely installed pipelines – example for a 9-meter pipe length.

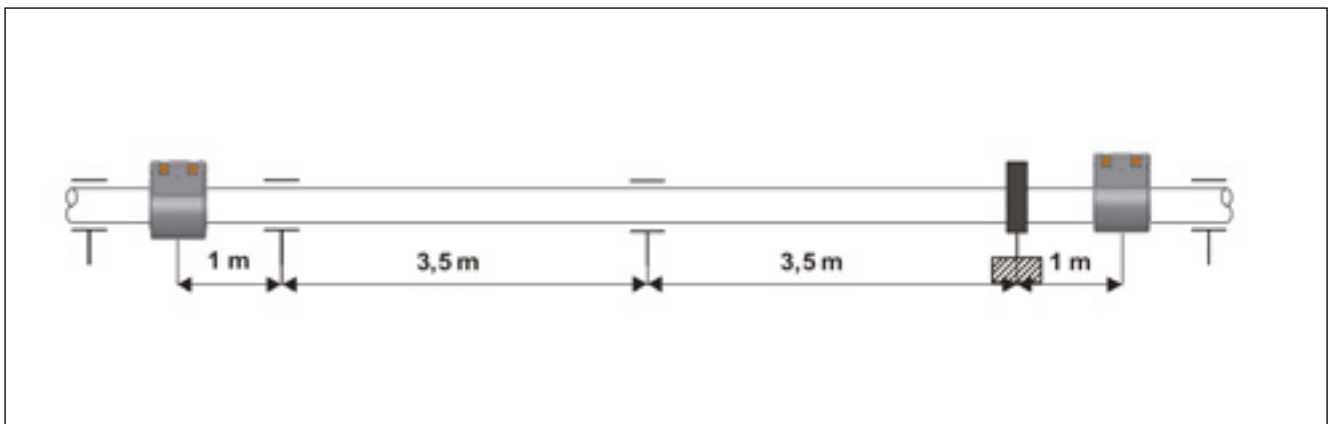

Application example:

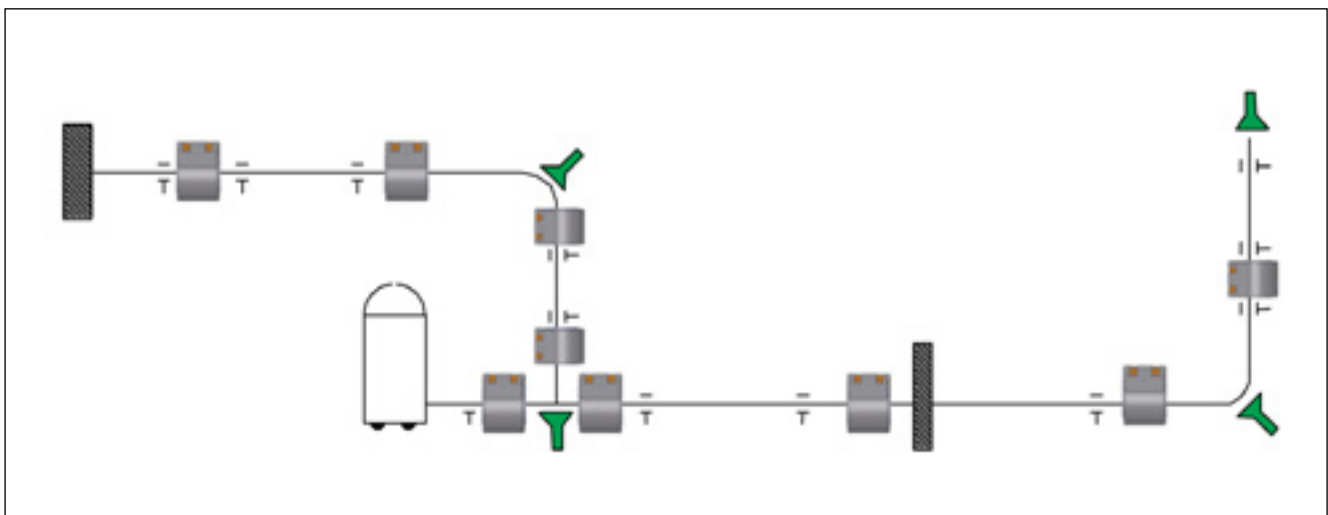

# INSTALLATION OF VERTICAL PIPELINES



The application of UNI-Combigrrip and UNI-Plastgrip couplings for installation of vertical pipelines is not recommended.

UNI-Grip pipe couplings are the ideal joints to keep plain-ended metal pipe sections in vertical installations perfectly tight and axially restrained.


In the extreme case of a vertical, free-hanging pump pressure mains, the forces arising for each coupling are calculated based on the following values:

- + weight of pipe sections
- + weight of couplings (joints)
- + weight of pump
- + weight of water column in pipes
- + force factor resulting from internal pressure and possible pressure surges

UNI-Grip, UNI-Combigrrip and UNI-Plastgrip pipe couplings deliver sufficient resistance against torsion, resulting from switching the pump on or off. (Please consult pump manufacturer for details).

## Application examples:

- + drilling hole pump lines
- + fresh water pump lines
- + heat pumps
- + shaft pipelines
- + charge and discharge systems of silos, tanks and containers

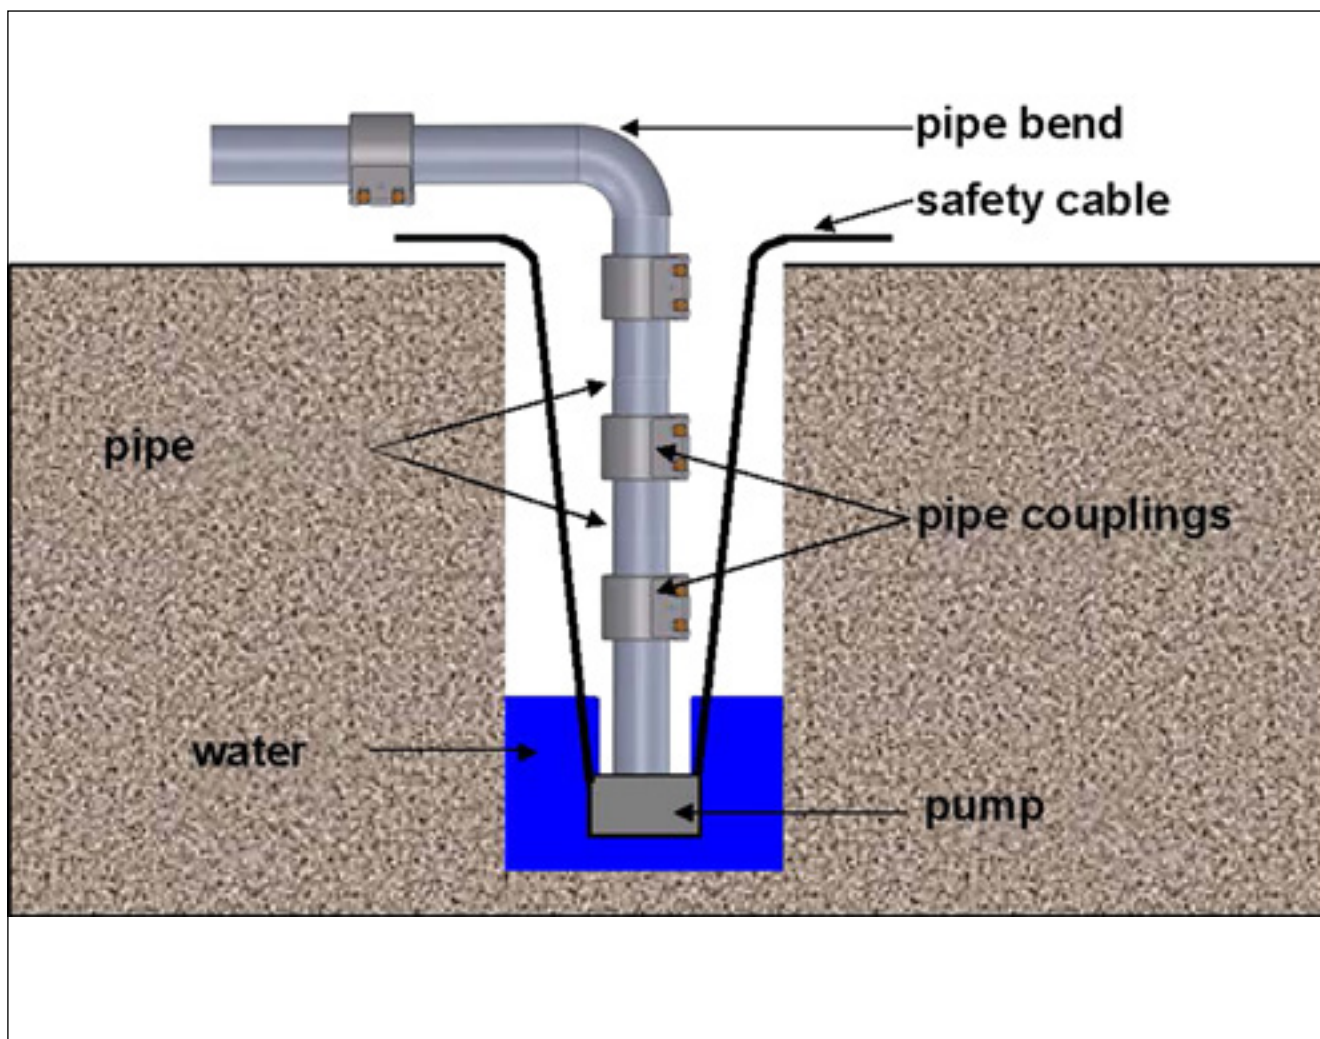

# ELECTRICAL CONDUCTIVITY

## UNI-FLEX / UNI-REP




**UNI-Flex and UNI-Rep pipe couplings do NOT provide electrical conductivity from pipe to pipe.**

However, they should not be used as 'insulation'. Even under prescribed installation conditions, an electrical contact between the housing of the coupling or the strip insert and the pipe surface can occur.

Should it be necessary to prevent electrical conductivity of the pipe joint, electrical insulation of the pipeline elements can be achieved by coupling-in a section of plastic pipe, measuring one meter in length.

If electrical conductivity is required, it can be achieved by bridging over the coupling from pipe to pipe with an earth strap.

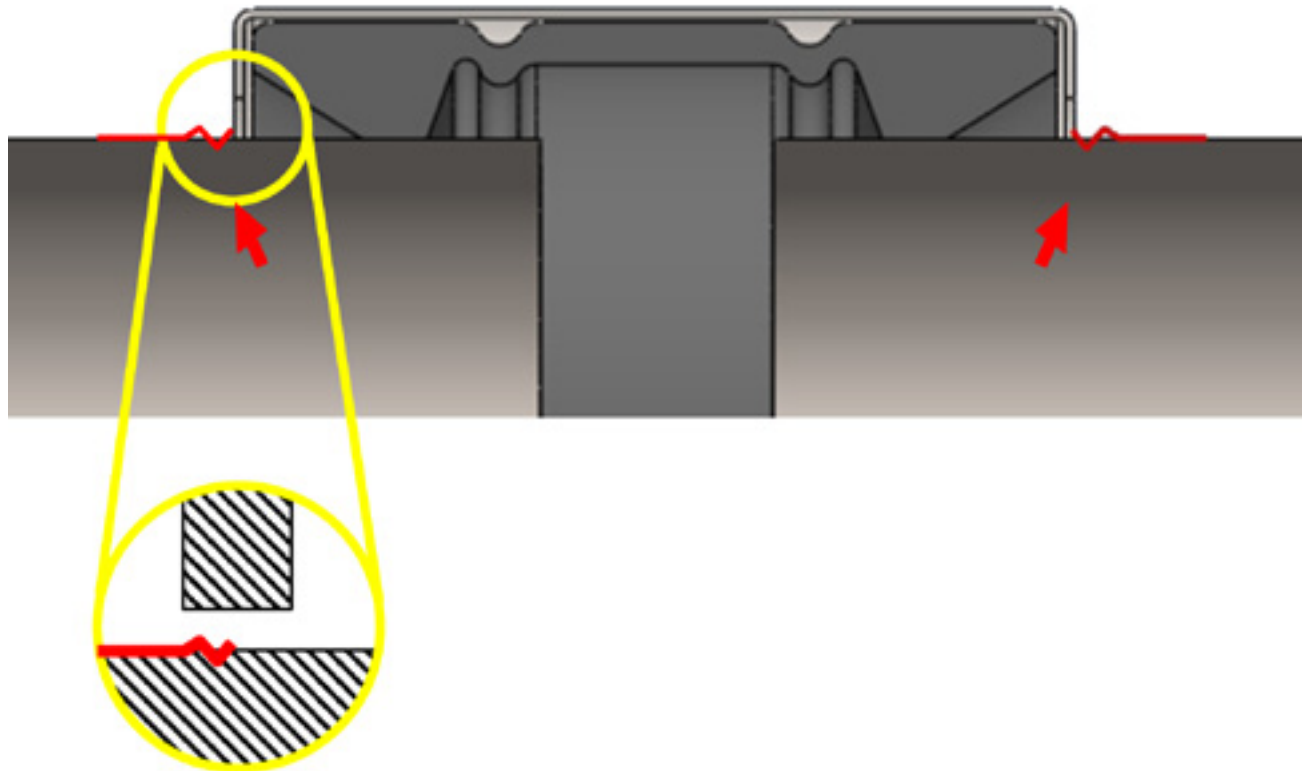




# ELECTRICAL CONDUCTIVITY UNI-GRIP



Because of the use of plastic pipes, there is no electrical conductivity with UNI-Combigrip and UNI-Plastgrip couplings.

UNI-Grip pipe couplings guarantee electrical conductivity for metal-to-metal piping by bridging over from pipe to pipe through the metallic anchoring mechanism.

Measurements have proven a sufficiently low electrical transition resistance of UNI-Grip pipe couplings.

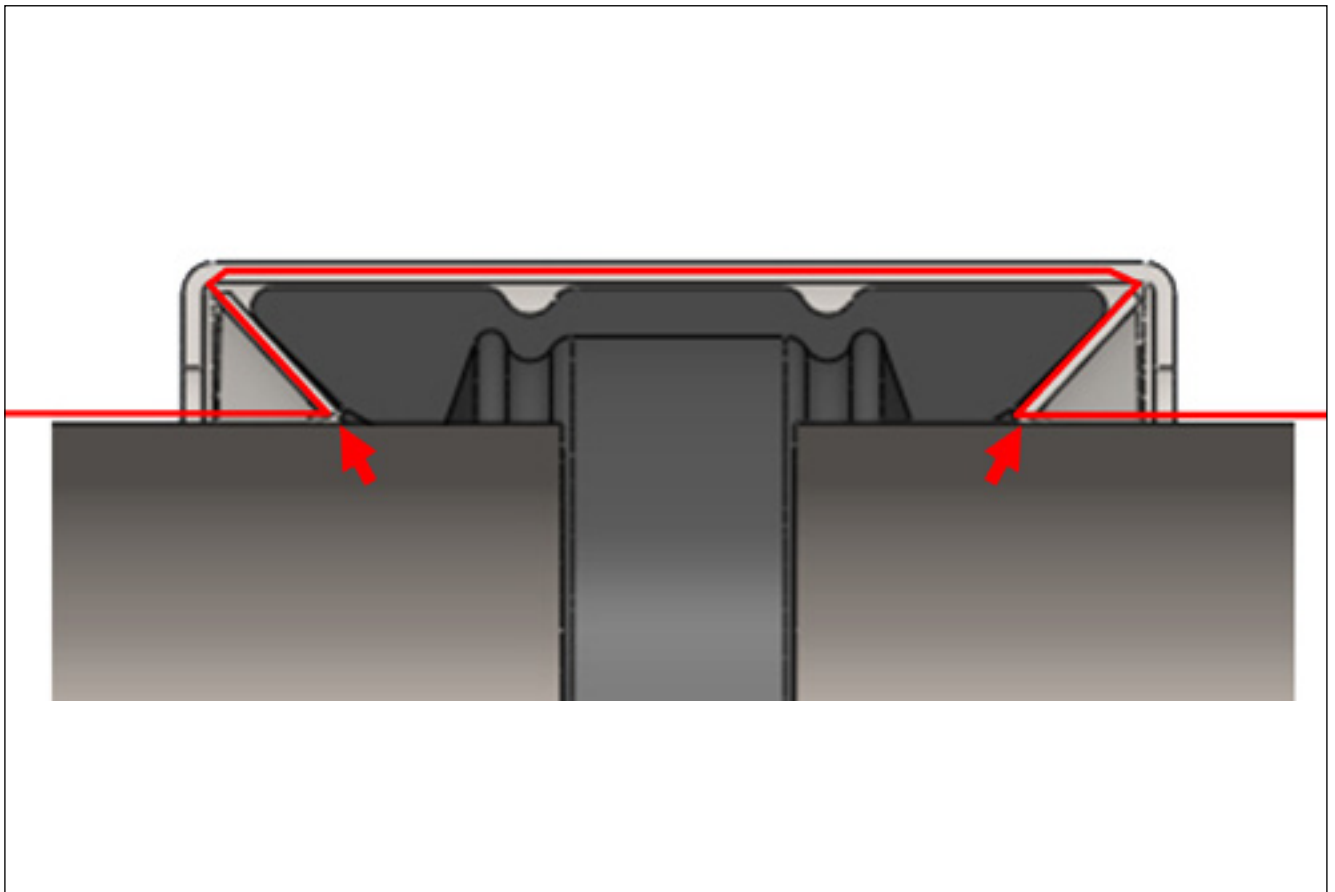

Electrical conductivity is ensured thanks to the anchoring rings gripping into the pure metallic surface of the pipe.



# Product Range

# UNI-GRIP L Ø 21 - 172 MM / PN 16

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4310 / 301	1.4310 / 301	1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	



  

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	

## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Technical details are subject to change. Typing errors may occur.

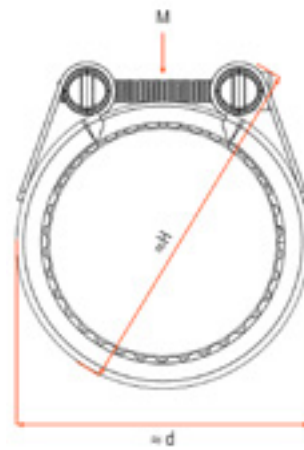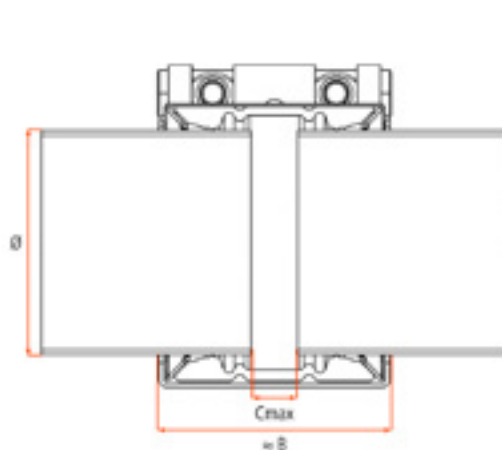



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-L-G-W5-*-21-24	21	23	21.3/21.6	16	70	45	10	46	76	M6	7	0.20	10
1-L-G-W5-*-26-29	26	29	26.9/28	16	70	45	10	46	76	M6	7	0.20	10
1-L-G-W5-*-29-32	29	32	30	16	70	45	10	54	84	M6	7	0.20	10
1-L-G-W5-*-33-36	33	36	33.7/35	16	70	45	10	54	84	M6	7	0.20	10
1-L-G-W5-*-36-39	36	39	38	16	60	60	15	66	104	M8	25	0.40	10
1-L-G-W5-*-39-43	39	43	42.4	16	50	60	15	66	104	M8	25	0.40	10
1-L-G-W5-*-43-47,5	43	47.5	44.5	16	50	60	15	74	112	M8	25	0.40	10
1-L-G-W5-*-47,5-52,5	47.5	52.5	48.3	16	50	60	15	74	112	M8	25	0.40	10
1-L-G-W5-*-52,5-58	52.5	58	54/57	16	50	75	25	85	125	M8	25	0.60	10
1-L-G-W5-*-58-64	58	64	60.3/63	16	40	75	25	85	125	M8	25	0.60	10
1-L-G-W5-*-64-72	64	72	66.6/68/69/70	16	40	95	30	108	164	M10	40	1.40	10
1-L-G-W5-*-72-80	72	80	73/76.1/79.5	16	40	95	30	108	164	M10	40	1.40	10
1-L-G-W5-*-80-88	80	88	84	16	35	95	30	124	170	M10	40	1.60	10
1-L-G-W5-*-88-96	88	96	88.9	16	35	95	30	124	170	M10	40	1.60	10
1-L-G-W5-*-97-105	97	105	98/100.6/101.6/104	16	35	95	30	141	187	M10	40	1.70	10
1-L-G-W5-*-104-112	104	112	104.8/108/110	16	35	95	30	141	187	M10	40	1.70	10
1-L-G-W5-*-112-120	112	120	114.3/118	16	35	95	30	158	202	M10	40	1.90	10
1-L-G-W5-*-122-130	122	130	125/127/129	16	32	95	30	158	202	M10	40	1.90	10
1-L-G-W5-*-129-137	129	137	130.2/131/133	16	32	110	40	178	230	M12	65	3.40	5
1-L-G-W5-*-137-145	137	145	139.7/141.3/141.6	16	32	110	40	186	238	M12	65	3.50	5
1-L-G-W5-*-149-157	149	157	154/155	16	32	110	40	197	249	M12	65	3.60	5
1-L-G-W5-*-157-165	157	165	159	16	32	110	40	205	255	M12	65	3.70	5
1-L-G-W5-*-164-172	164	172	165/168.3	16	32	110	40	212	262	M12	65	3.80	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-GRIP S Ø 21 - 172 MM / PN 16

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4310 / 301	1.4310 / 301	1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	



  

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	

## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Technical details are subject to change. Typing errors may occur.

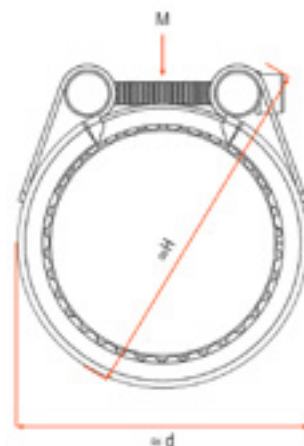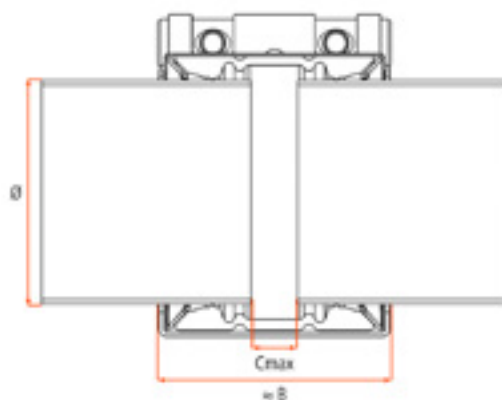





Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-S-G-W5-*-21-24	21	23	21.3/21.6	16	70	45	10	46	76	M6	7	0.20	10
1-S-G-W5-*-26-29	26	29	26.9/28	16	70	45	10	46	76	M6	7	0.20	10
1-S-G-W5-*-29-32	29	32	30	16	70	45	10	54	84	M6	7	0.20	10
1-S-G-W5-*-33-36	33	36	33.7/35	16	70	45	10	54	84	M6	7	0.20	10
1-S-G-W5-*-36-39	36	39	38	16	60	60	15	66	104	M8	25	0.40	10
1-S-G-W5-*-39-43	39	43	42.4	16	50	60	15	66	104	M8	25	0.40	10
1-S-G-W5-*-43-47,5	43	47.5	44.5	16	50	60	15	74	112	M8	25	0.40	10
1-S-G-W5-*-47,5-52,5	47.5	52.5	48.3	16	50	60	15	74	112	M8	25	0.40	10
1-S-G-W5-*-52,5-58	52.5	58	54/57	16	50	75	25	85	125	M8	25	0.60	10
1-S-G-W5-*-58-64	58	64	60.3/63	16	40	75	25	85	125	M8	25	0.60	10
1-S-G-W5-*-64-72	64	72	66.6/68/69/70	16	40	95	30	108	164	M10	40	1.40	10
1-S-G-W5-*-72-80	72	80	73/76.1/79.5	16	40	95	30	108	164	M10	40	1.40	10
1-S-G-W5-*-80-88	80	88	84	16	35	95	30	124	170	M10	40	1.60	10
1-S-G-W5-*-88-96	88	96	88.9	16	35	95	30	124	170	M10	40	1.60	10
1-S-G-W5-*-97-105	97	105	98/100.6/101.6/104	16	35	95	30	141	187	M10	40	1.70	10
1-S-G-W5-*-104-112	104	112	104.8/108/110	16	35	95	30	141	187	M10	40	1.70	10
1-S-G-W5-*-112-120	112	120	114.3/118	16	35	95	30	158	202	M10	40	1.90	10
1-S-G-W5-*-122-130	122	130	125/127/129	16	32	95	30	158	202	M10	40	1.90	10
1-S-G-W5-*-129-137	129	137	130.2/131/133	16	32	110	40	178	230	M12	65	3.40	5
1-S-G-W5-*-137-145	137	145	139.7/141.3/141.6	16	32	110	40	186	238	M12	65	3.50	5
1-S-G-W5-*-149-157	149	157	154/155	16	32	110	40	197	249	M12	65	3.60	5
1-S-G-W5-*-157-165	157	165	159	16	32	110	40	205	255	M12	65	3.70	5
1-S-G-W5-*-164-172	164	172	165/168.3	16	32	110	40	212	262	M12	65	3.80	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-GRIP S Ø 188 - 290 MM / PN 16

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4310 / 301	1.4310 / 301	1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	



  

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	

## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Technical details are subject to change. Typing errors may occur.

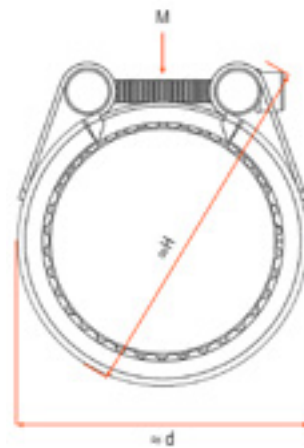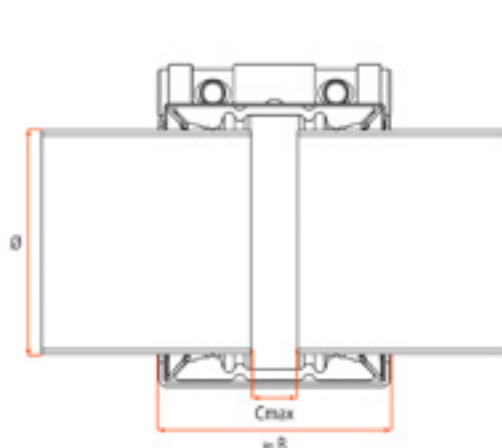



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S-G-C-W5-*-188-198	188	198	190/191/193.7/195/196/197	16	25	142	40	236	262	M16	160	6.46	1
2-S-G-C-W5-*-201-211	201	211	202/203/204/205/206/208/210/211	16	25	142	40	249	275	M16	160	6.66	1
2-S-G-G-W5-*-213-223	213	223	215/216/217/219.1/220/222	16	25	146	40	261	287	M16	160	9.18	1
2-S-G-G-W5-*-224-234	224	234	224/225/226/228/229/230/232/234	16	25	146	40	272	298	M16	160	9.45	1
2-S-G-G-W5-*-237-247	237	247	238/240/241/242/244/244.5/246	16	25	146	40	285	311	M16	160	9.78	1
2-S-G-G-W5-*-250-260	250	260	250/252/254/255/256/257/259	16	25	146	40	298	324	M16	160	10.11	1
** 2-S-G-G-W5-*-266-276	266	276	268/267/271/272/273.1/274/275	16	25	146	40	314	340	M16	160	10.51	1
** 2-S-G-G-W5-*-280-290	280	290	280/284/286/287/288/289	16	25	146	40	328	354	M16	160	10.86	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

\*\*Restricted working conditions for CuNiFe tubes with a wall thickness ≤ to 4 mm. Pipe dimensions may only be loaded with max PN 2.5.

# UNI-GRIP LE Ø 64 - 172 MM / PN 10

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4310 / 301	1.4310 / 301	1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	



  

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	

## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Technical details are subject to change. Typing errors may occur.

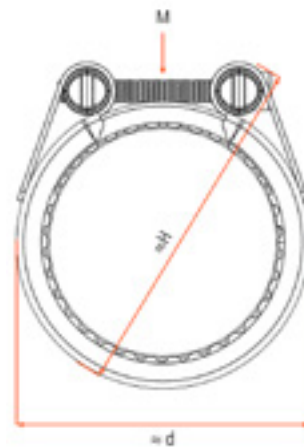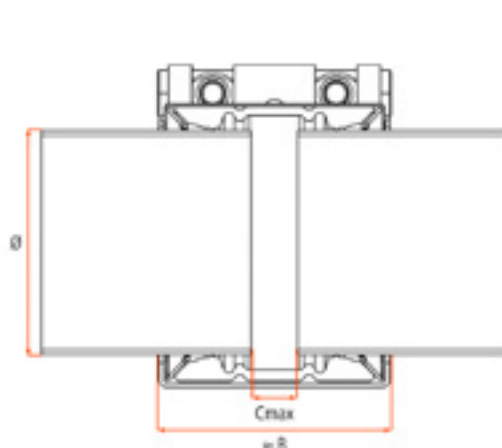



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-LE-G-W5-*64-72	64	72	66.6/68/69/70	10	16	95	30	108	164	M10	40	1.00	10
1-LE-G-W5-*72-80	72	80	73/76.1/79.5	10	16	95	30	108	164	M10	40	1.00	10
1-LE-G-W5-*80-88	80	88	84	10	16	95	30	124	170	M10	40	1.00	10
1-LE-G-W5-*88-96	88	96	88.9	10	16	95	30	124	170	M10	40	1.00	10
1-LE-G-W5-*97-105	97	105	98/100.6/101.6/104	10	16	95	30	141	187	M10	40	1.10	10
1-LE-G-W5-*104-112	104	112	104.8/108/110	10	16	95	30	141	187	M10	40	1.10	10
1-LE-G-W5-*112-120	112	120	114.3/118	10	16	95	30	158	202	M10	40	1.20	10
1-LE-G-W5-*122-130	122	130	125/127/129	10	16	95	30	158	202	M10	40	1.20	10
1-LE-G-W5-*129-137	129	137	130.2/131/133	10	16	110	40	178	230	M12	65	2.10	5
1-LE-G-W5-*137-145	137	145	139.7/141.3/141.6	10	16	110	40	186	238	M12	65	2.20	5
1-LE-G-W5-*149-157	149	157	154/155	10	16	110	40	197	249	M12	65	2.30	5
1-LE-G-W5-*157-165	157	165	159	10	16	110	40	205	255	M12	65	2.30	5
1-LE-G-W5-*164-172	164	172	165/168.3	10	16	110	40	212	262	M12	65	2.40	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-GRIP SE Ø 64 - 172 MM / PN 10

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4310 / 301	1.4310 / 301	1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	



  

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	

## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Technical details are subject to change. Typing errors may occur.

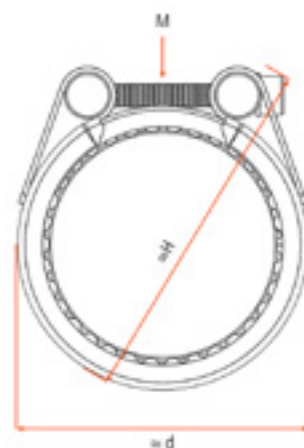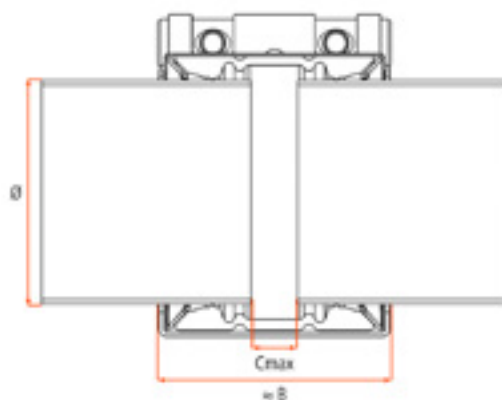





Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-SE-G-W5-*64-72	64	72	66.6/68/69/70	10	16	95	30	108	164	M10	40	1.00	10
1-SE-G-W5-*72-80	72	80	73/76.1/79.5	10	16	95	30	108	164	M10	40	1.00	10
1-SE-G-W5-*80-88	80	88	84	10	16	95	30	124	170	M10	40	1.00	10
1-SE-G-W5-*88-96	88	96	88.9	10	16	95	30	124	170	M10	40	1.00	10
1-SE-G-W5-*97-105	97	105	98/100.6/101.6/104	10	16	95	30	141	187	M10	40	1.10	10
1-SE-G-W5-*104-112	104	112	104.8/108/110	10	16	95	30	141	187	M10	40	1.10	10
1-SE-G-W5-*112-120	112	120	114.3/118	10	16	95	30	158	202	M10	40	1.20	10
1-SE-G-W5-*122-130	122	130	125/127/129	10	16	95	30	158	202	M10	40	1.20	10
1-SE-G-W5-*129-137	129	137	130.2/131/133	10	16	110	40	178	230	M12	65	2.10	5
1-SE-G-W5-*137-145	137	145	139.7/141.3/141.6	10	16	110	40	186	238	M12	65	2.20	5
1-SE-G-W5-*149-157	149	157	154/155	10	16	110	40	197	249	M12	65	2.30	5
1-SE-G-W5-*157-165	157	165	159	10	16	110	40	205	255	M12	65	2.30	5
1-SE-G-W5-*164-172	164	172	165/168.3	10	16	110	40	212	262	M12	65	2.40	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-GRIP S Ø 213 - 374 MM / PN 10

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4310 / 301	1.4310 / 301	1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	



  

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	

## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Technical details are subject to change. Typing errors may occur.

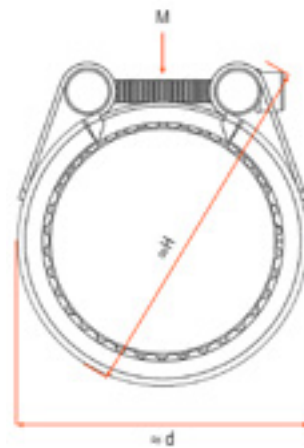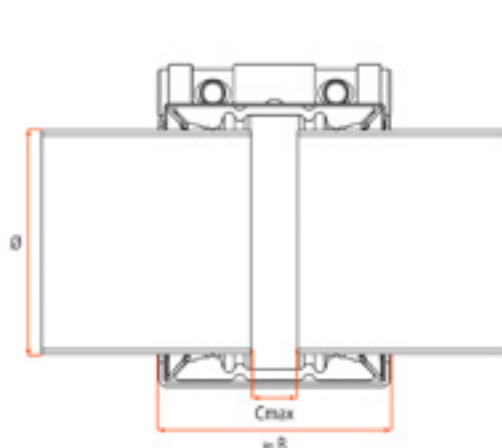



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S-G-C-W5-*-213-223	213	223	215/216/217/219.1/220/222	10	16	142	40	261	287	M16	160	6.86	1
2-S-G-C-W5-*-224-234	224	234	224/225/226/228/229/230/232/234	10	16	142	40	272	298	M16	160	7.03	1
2-S-G-C-W5-*-237-247	237	247	238/240/241/242/244/244.5/246	10	16	142	40	285	311	M16	160	7.24	1
2-S-G-C-W5-*-250-260	250	260	250/252/254/255/256/257/259	10	16	142	40	298	324	M16	160	7.45	1
** 2-S-G-C-W5-*-266-276	266	276	268/267/271/272/273.1/274/275	10	16	142	40	314	340	M16	160	7.71	1
** 2-S-G-C-W5-*-280-290	280	290	280/284/286/287/288/289	10	16	146	40	328	354	M16	160	7.93	1
** 2-S-G-G-W5-*-291-301	291	301	292/295/296/298/300	10	16	146	40	339	365	M16	160	11.13	1
** 2-S-G-G-W5-*-304-314	304	314	304/305/306/308/310/311/313	10	16	146	40	352	378	M16	160	11.46	1
** 2-S-G-G-W5-*-318-328	318	328	318/320/321/323.9/326/327	10	16	146	40	366	392	M16	160	11.81	1
** 2-S-G-G-W5-*-330-340	330	340	330/333.8/334/336/337/339/340	10	16	146	40	378	404	M16	160	12.11	1
** 2-S-G-G-W5-*-343-353	343	353	343/345/346/348/350/352	10	16	146	40	391	417	M16	160	12.43	1
** 2-S-G-G-W5-*-353-363	353	363	353/354/355/355.6/356/358/360/362	10	16	146	40	401	427	M16	160	12.68	1
** 2-S-G-G-W5-*-364-374	364	374	367/368/372	10	16	146	40	412	438	M16	160	12.96	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

\*\*Restricted working conditions for CuNiFe tubes with a wall thickness ≤ to 4 mm. Pipe dimensions may only be loaded with max PN 2.5.



# UNI-GRIP S Ø 188 - 516 MM / PN 6

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4310 / 301	1.4310 / 301	1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	
Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	

## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Technical details are subject to change. Typing errors may occur.

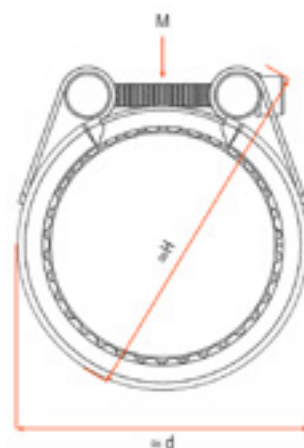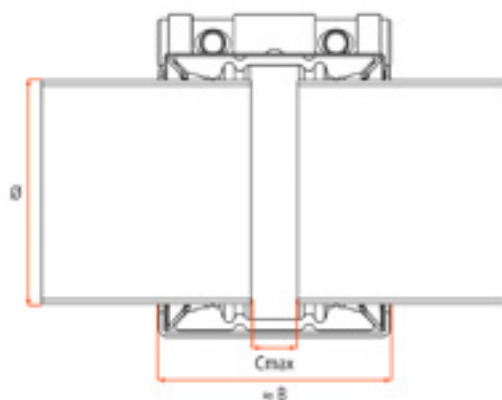



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S-G-B-W5-*-188-198	188	198	190/191/193.7/195/196/197	6	10	140	40	236	262	M16	160	5.39	1
2-S-G-B-W5-*-201-211	201	211	202/203/204/205/206/208/210/211	6	10	140	40	249	275	M16	160	5.57	1
2-S-G-B-W5-*-213-223	213	223	215/216/217/219.1/220/222	6	10	140	40	261	287	M16	160	5.74	1
2-S-G-B-W5-*-224-234	224	234	224/225/226/228/229/230/232/234	6	10	140	40	272	298	M16	160	5.89	1
2-S-G-B-W5-*-237-247	237	247	238/240/241/242/244/244.5/246	6	10	140	40	285	311	M16	160	6.07	1
2-S-G-B-W5-*-250-260	250	260	250/252/254/255/256/257/259	6	10	140	40	298	324	M16	160	6.25	1
** 2-S-G-B-W5-*-266-276	266	276	268/267/271/272/273.1/274/275	6	10	140	40	314	340	M16	160	6.47	1
** 2-S-G-B-W5-*-280-290	280	290	280/284/286/287/288/289/290	6	10	142	40	328	354	M16	160	6.66	1
** 2-S-G-C-W5-*-291-301	291	301	292/295/296/298/300	6	10	142	40	339	365	M16	160	8.11	1
** 2-S-G-C-W5-*-304-314	304	314	304/305/306/308/310/311/313	6	10	142	40	352	378	M16	160	8.32	1
** 2-S-G-C-W5-*-318-328	318	328	318/320/321/323.9/326/327	6	10	142	40	366	392	M16	160	8.54	1
** 2-S-G-C-W5-*-330-340	330	340	330/333.8/334/336/337/339/340	6	10	142	40	378	404	M16	160	8.73	1
** 2-S-G-C-W5-*-343-353	343	353	343/345/346/348/350/352	6	10	142	40	391	417	M16	160	8.94	1
** 2-S-G-C-W5-*-353-363	353	363	353/354/355/355.6/356/358/360/362	6	10	142	40	401	427	M16	160	9.10	1
** 2-S-G-C-W5-*-364-374	364	374	367/368/372	6	10	142	40	412	438	M16	160	9.28	1
** 2-S-G-G-W5-*-377-387	377	387	378/380/382/384/385/386	6	10	146	40	425	451	M16	160	13.28	1
** 2-S-G-G-W5-*-390-400	390	400	392/394/395/396/398/399/400	6	10	146	40	438	464	M16	160	13.61	1
** 2-S-G-G-W5-*-403-413	403	413	403/404/405/406/406.4/408/410/412	6	10	146	40	451	477	M16	160	13.93	1
2-S-G-G-W5-*-415-425	415	425	419/420/421	6	10	146	40	463	489	M16	160	14.23	1
2-S-G-G-W5-*-425-435	425	435	426/427/428/429/430/432/433/434	6	10	146	40	473	499	M16	160	14.48	1
2-S-G-G-W5-*-441-451	441	451	441/442/444/448/450	6	10	146	40	489	515	M16	160	14.88	1
2-S-G-G-W5-*-454-464	454	464	454/456/457.2/459/460/463	6	10	146	40	502	528	M16	160	15.21	1
2-S-G-G-W5-*-463-473	463	473	464/468/470	6	10	146	40	511	537	M16	160	15.43	1
2-S-G-G-W5-*-479-489	479	489	480/486/488	6	10	146	40	527	553	M16	160	15.83	1
2-S-G-G-W5-*-491-501	491	501	492/494/496/498/500	6	10	146	40	539	565	M16	160	16.13	1
2-S-G-G-W5-*-506-516	506	516	506/507/508/510/512/514/515	6	10	146	40	554	580	M16	160	16.51	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

\*\*Restricted working conditions for CuNiFe tubes with a wall thickness ≤ to 4 mm. Pipe dimensions may only be loaded with max PN 2.5.

# UNI-GRIP S Ø 291 - 745 MM / PN 2.5

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4310 / 301	1.4310 / 301	1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	



  

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	

## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Technical details are subject to change. Typing errors may occur.

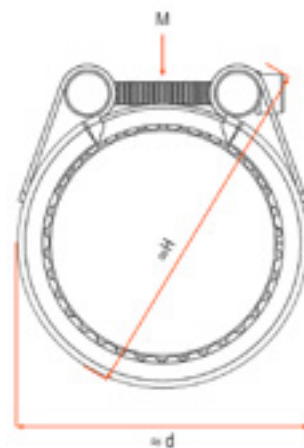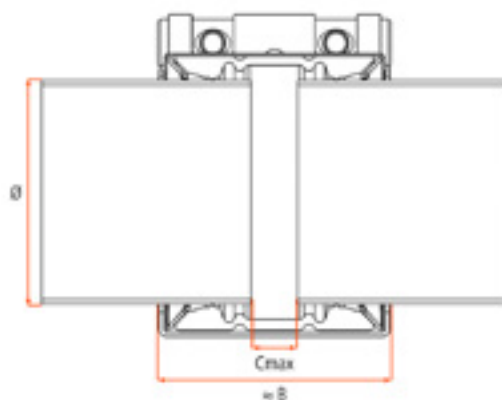





Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S-G-B-W5-*291-301	291	301	292/295/296/298/300	2.5	6	140	40	339	365	M16	160	6.81	1
2-S-G-B-W5-*304-314	304	314	304/305/306/308/310/311/313	2.5	6	140	40	352	378	M16	160	6.99	1
2-S-G-B-W5-*318-328	318	328	318/320/321/323.9/326/327	2.5	6	140	40	366	392	M16	160	7.19	1
2-S-G-B-W5-*330-340	330	340	330/333.8/334/336/337/339/340	2.5	6	140	40	378	404	M16	160	7.35	1
2-S-G-B-W5-*343-353	343	353	343/345/346/348/350/352	2.5	6	140	40	391	417	M16	160	7.53	1
2-S-G-B-W5-*353-363	353	363	353/354/355/355.6/356/358/360/362	2.5	6	140	40	401	427	M16	160	7.67	1
2-S-G-B-W5-*364-374	364	374	367/368/372	2.5	6	140	40	412	438	M16	160	7.82	1
2-S-G-C-W5-*377-387	377	387	378/380/382/384/385/386	2.5	6	142	40	425	451	M16	160	9.49	1
2-S-G-C-W5-*390-400	390	400	392/394/395/396/398/399/400	2.5	6	142	40	438	464	M16	160	9.70	1
2-S-G-C-W5-*403-413	403	413	403/404/405/406/406.4/408/410/412	2.5	6	142	40	451	477	M16	160	9.90	1
2-S-G-C-W5-*415-425	415	425	419/420/421	2.5	6	142	40	463	489	M16	160	10.10	1
2-S-G-C-W5-*425-435	425	435	426/427/428/429/430/432/433/434	2.5	6	142	40	473	499	M16	160	10.26	1
2-S-G-C-W5-*441-451	441	451	441/442/444/448/450	2.5	6	142	40	489	515	M16	160	10.51	1
2-S-G-C-W5-*454-464	454	464	454/456/457.2/459/460/463	2.5	6	142	40	502	528	M16	160	10.72	1
2-S-G-C-W5-*463-473	463	473	464/468/470	2.5	6	142	40	511	537	M16	160	10.87	1
2-S-G-C-W5-*479-489	479	489	480/486/488	2.5	6	142	40	527	553	M16	160	11.12	1
2-S-G-C-W5-*491-501	491	501	492/494/496/498/500	2.5	6	142	40	539	565	M16	160	11.31	1
2-S-G-C-W5-*506-516	506	516	506/507/508/510/512/514/515	2.5	6	142	40	554	580	M16	160	11.56	1
2-S-G-G-W5-*523-533	523	533	524/526/530/532	2.5	6	146	40	575	603	M16	160	16.94	1
2-S-G-G-W5-*534-544	534	544	537/538/540/542/543	2.5	6	146	40	586	614	M16	160	17.21	1
2-S-G-G-W5-*549-559	549	559	549/550/558/559	2.5	6	146	40	601	629	M16	160	17.59	1
2-S-G-G-W5-*560-570	560	570	560/564/568	2.5	6	146	40	612	640	M16	160	17.86	1
2-S-G-G-W5-*574-584	574	584	574/576/582/583	2.5	6	146	40	626	654	M16	160	18.21	1
2-S-G-G-W5-*603-613	603	613	605/606/609.6/610/612	2.5	6	146	40	655	683	M16	160	18.94	1
2-S-G-G-W5-*613-623	613	623	613.7/620/622	2.5	6	146	40	665	693	M16	160	19.19	1
2-S-G-G-W5-*631-641	631	641	632/633/634/635/640	2.5	6	146	40	683	711	M16	160	19.64	1
2-S-G-G-W5-*651-661	651	661	651/654/655/658/659/660	2.5	6	146	40	703	731	M16	160	20.14	1
2-S-G-G-W5-*679-689	679	689	680/686/688	2.5	6	146	40	731	759	M16	160	20.84	1
2-S-G-G-W5-*691-701	691	701	691/698/700	2.5	6	146	40	743	771	M16	160	21.14	1
2-S-G-G-W5-*703-713	703	713	705/710/711.2	2.5	6	146	40	755	783	M16	160	21.44	1
2-S-G-G-W5-*720-730	720	730	720/726/729	2.5	6	146	40	772	800	M16	160	21.86	1
2-S-G-G-W5-*735-745	735	745	735/738/743/744	2.5	6	146	40	787	815	M16	160	22.24	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-PLASTGRIP L Ø 39 - 172 MM / PN 10

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4404 / 316 L	1.4404 / 316 L	1.4404 / 316 L	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

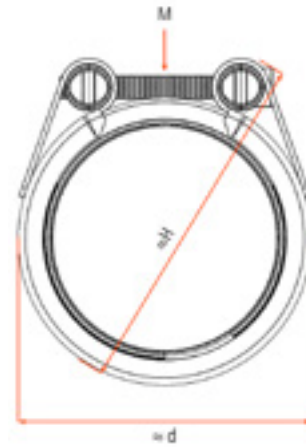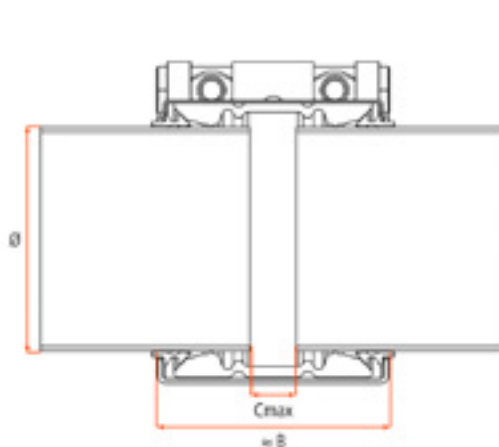



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted				Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity	
				PN	WP	≈ B	Cmax	≈ d	≈ H				M
1-L-PG-W5-*-39-43	39	43	42.4/40	10	16	60	15	66	104	M8	25	0.40	10
1-L-PG-W5-*-47-52,5	47.5	52.5	48.3/50	10	16	60	15	74	112	M8	25	0.50	10
1-L-PG-W5-*-58-64	58	64	60.3/63	10	16	75	25	85	125	M8	25	0.60	10
1-L-PG-W5-*-72-80	72	80	73/75/76.1/79.5	10	16	95	30	108	164	M10	40	1.40	10
1-L-PG-W5-*-88-96	88	96	88.9/90	10	16	95	30	124	170	M10	40	1.50	10
1-L-PG-W5-*-104-112	104	112	104.8/108/110	10	16	95	30	141	187	M10	40	1.70	10
1-L-PG-W5-*-108-115	108	115	110/114.3	10	16	95	30	141	187	M10	40	1.70	10
1-L-PG-W5-*-122-130	122	130	125/127/129	10	16	95	30	158	202	M10	40	1.80	10
1-L-PG-W5-*-137-145	137	145	139.7/140/141.3/141.6	10	16	110	40	186	238	M12	65	3.50	5
1-L-PG-W5-*-157-165	157	165	159/160	10	16	110	40	205	255	M12	65	3.70	5
1-L-PG-W5-*-164-172	164	172	165/168.3	10	16	110	40	212	262	M12	65	3.80	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-PLASTGRIP S Ø 39 - 172 MM / PN 10

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4404 / 316 L	1.4404 / 316 L	1.4404 / 316 L	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

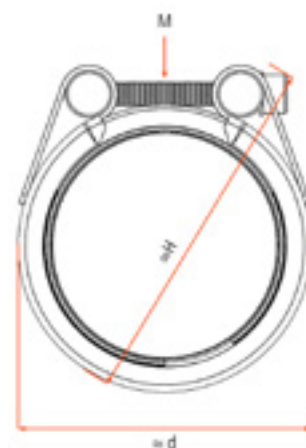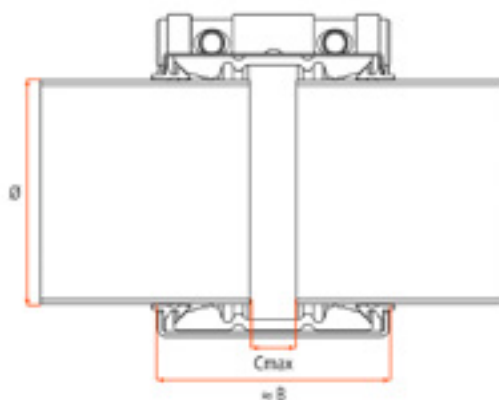



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-S-PG-W5-*-39-43	39	43	42.4/40	10	16	60	15	66	104	M8	25	0.40	10
1-S-PG-W5-*-47-52,5	47.5	52.5	48.3/50	10	16	60	15	74	112	M8	25	0.50	10
1-S-PG-W5-*-58-64	58	64	60.3/63	10	16	75	25	85	125	M8	25	0.60	10
1-S-PG-W5-*-72-80	72	80	73/75/76.1/79.5	10	16	95	30	108	164	M10	40	1.40	10
1-S-PG-W5-*-88-96	88	96	88.9/90	10	16	95	30	124	170	M10	40	1.50	10
1-S-PG-W5-*-104-112	104	112	104.8/108/110	10	16	95	30	141	187	M10	40	1.70	10
1-S-PG-W5-*-108-115	108	115	110/114.3	10	16	95	30	141	187	M10	40	1.70	10
1-S-PG-W5-*-122-130	122	130	125/127/129	10	16	95	30	158	202	M10	40	1.80	10
1-S-PG-W5-*-137-145	137	145	139.7/140/141.3/141.6	10	16	110	40	186	238	M12	65	3.50	5
1-S-PG-W5-*-157-165	157	165	159/160	10	16	110	40	205	255	M12	65	3.70	5
1-S-PG-W5-*-164-172	164	172	165/168.3	10	16	110	40	212	262	M12	65	3.80	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-PLASTGRIP S Ø 175 - 363 MM / PN 10

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4404 / 316 L	1.4404 / 316 L	1.4404 / 316 L	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

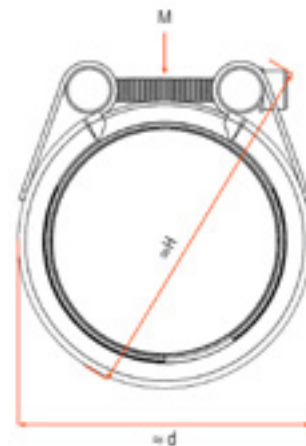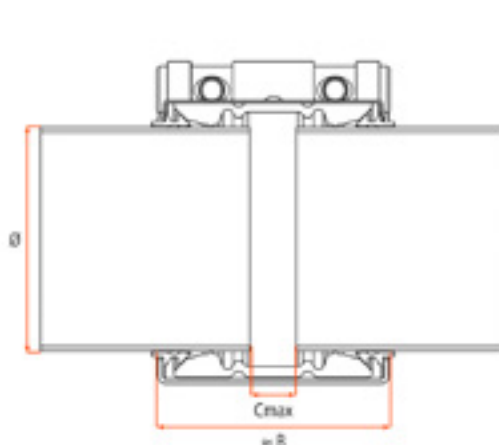



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S-PG-C-W5*-175-185	175	185	180	10	16	142	40	223	249	M16	160	6.23	1
2-S-PG-C-W5*-198-208	198	208	200/202/203/204/205/206/208	10	16	142	40	246	272	M16	160	6.80	1
2-S-PG-C-W5*-218-228	218	228	219.1/220/222/224/225/226/228	10	16	142	40	266	292	M16	160	7.30	1
2-S-PG-C-W5*-250-260	250	260	250/252/254/255/256/257/259	10	16	142	40	298	324	M16	160	8.10	1
2-S-PG-C-W5*-272-282	272	282	272/273.1/274/275/278/280	10	16	142	40	320	346	M16	160	8.65	1
2-S-PG-G-W5*-315-325	315	325	315/316/318/320/321/323.9	10	16	146	40	363	389	M16	160	11.11	1
2-S-PG-G-W5*-353-363	353	363	353/354/355/355.6/356/358/360/362	10	16	146	40	401	427	M16	160	12.20	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton



# UNI-PLASTGRIP LE Ø 72 - 172 MM / PN 6

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4404 / 316 L	1.4404 / 316 L	1.4404 / 316 L	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

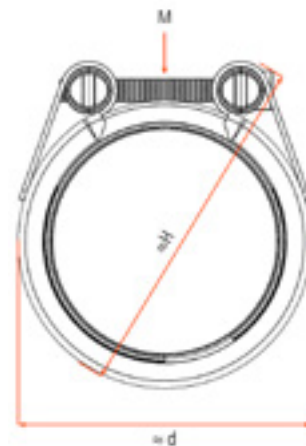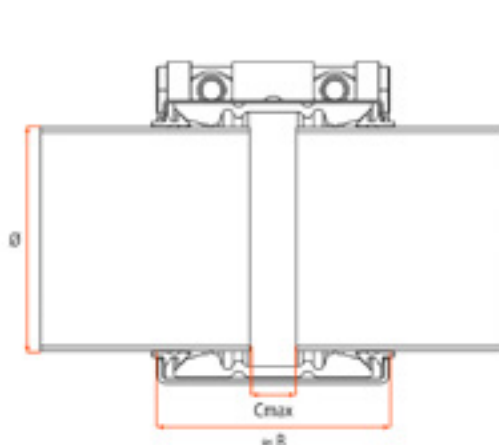



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-LE-PG-W5-*-72-80	72	80	73/75/76.1/79.5	6	10	95	30	108	164	M10	40	1.00	10
1-LE-PG-W5-*-88-96	88	96	88.9/90	6	10	95	30	124	170	M10	40	1.00	10
1-LE-PG-W5-*-104-112	104	112	104.8/108/110	6	10	95	30	141	187	M10	40	1.10	10
1-LE-PG-W5-*-108-115	108	115	108/110/114.3	6	10	95	30	141	187	M10	40	1.20	10
1-LE-PG-W5-*-122-130	122	130	125/127/129	6	10	95	30	158	202	M10	40	1.20	10
1-LE-PG-W5-*-137-145	137	145	139.7/140/141.3/141.6	6	10	110	40	186	238	M12	65	2.20	5
1-LE-PG-W5-*-157-165	157	165	159/160	6	10	110	40	205	255	M12	65	2.30	5
1-LE-PG-W5-*-164-172	164	172	165/168.3	6	10	110	40	212	262	M12	65	2.40	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-PLASTGRIP SE Ø 72 - 172 MM / PN 6

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4404 / 316 L	1.4404 / 316 L	1.4404 / 316 L	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

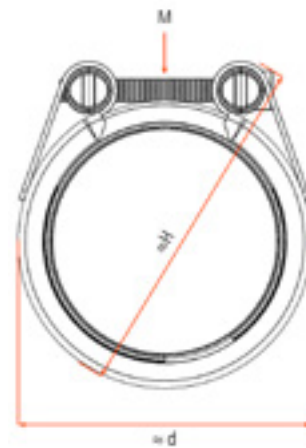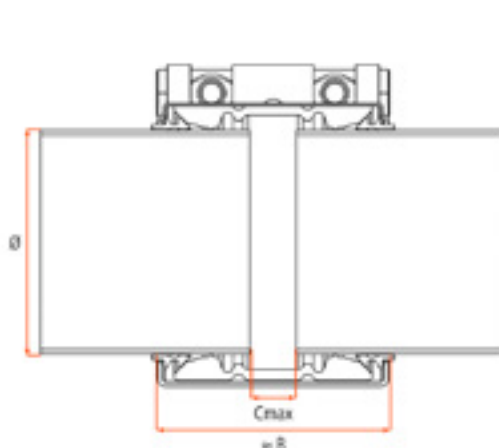



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-SE-PG-W5-*-72-80	72	80	73/75/76.1/79.5	6	10	95	30	108	164	M10	40	1.00	10
1-SE-PG-W5-*-88-96	88	96	88.9/90	6	10	95	30	124	170	M10	40	1.00	10
1-SE-PG-W5-*-104-112	104	112	104.8/108/110	6	10	95	30	141	187	M10	40	1.10	10
1-SE-PG-W5-*-108-115	108	115	110/114.3	6	10	95	30	141	187	M10	40	1.20	10
1-SE-PG-W5-*-122-130	122	130	125/127/129	6	10	95	30	158	202	M10	40	1.20	10
1-SE-PG-W5-*-137-145	137	145	139.7/140/141.3/141.6	6	10	110	40	186	238	M12	65	2.20	5
1-SE-PG-W5-*-157-165	157	165	159/160	6	10	110	40	205	255	M12	65	2.30	5
1-SE-PG-W5-*-164-172	164	172	165/168.3	6	10	110	40	212	262	M12	65	2.40	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-PLASTGRIP S Ø 175 - 515 MM / PN 6

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4404 / 316 L	1.4404 / 316 L	1.4404 / 316 L	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances
- + Article Nr. S2 = 2 pieces

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

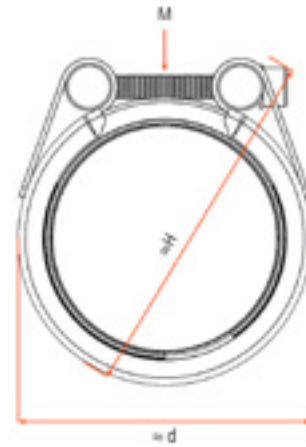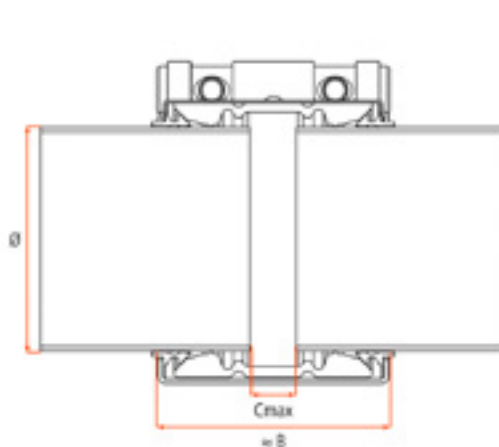



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S-PG-B-W5*-175-185	175	185	180	6	10	140	40	223	249	M16	160	4.98	1
2-S-PG-B-W5*-198-208	198	208	200/202/203/204/205/206/208	6	10	140	40	246	272	M16	160	5.44	1
2-S-PG-B-W5*-218-228	218	228	219.1/220/222/224/225/226/228	6	10	140	40	266	292	M16	160	5.84	1
2-S-PG-B-W5*-250-260	250	260	250/252/254/255/256/257/259	6	10	140	40	298	324	M16	160	6.48	1
2-S-PG-B-W5*-272-282	272	282	272/273.1/274/275/278/280	6	10	140	40	320	346	M16	160	6.92	1
2-S-PG-C-W5*-315-325	315	325	315/316/318/320/321/323.9	6	10	142	40	363	389	M16	160	8.64	1
2-S-PG-C-W5*-353-363	353	363	353/354/355/355.6/356/358/360/362	6	10	142	40	401	427	M16	160	9.49	1
2-S-PG-G-W5*-398-408	398	408	398/399/400/403/404/405/406/406.4/408	6	10	146	40	446	472	M16	160	13.49	1
2-S2-PG-G-W5*-440-460	440	460	440/441/442/444/448/450/452/453/454/456/457.2/459/460	6	10	146	40	498	524	M16	160	17.47	1
2-S2-PG-G-W5*-495-515	495	515	496/498/500/504/506/507/508/510/512/514/515	6	10	146	40	553	579	M16	160	19.30	1

\*Article Nr.: E for EPDM. N for NBR and V for Viton

# UNI-PLASTGRIP S Ø 315 - 640 MM / PN 2.5

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4404 / 316 L	1.4404 / 316 L	1.4404 / 316 L	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances
- + Article Nr. S2 = 2 pieces, S3 = 3 pieces, S4 = 4 pieces

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

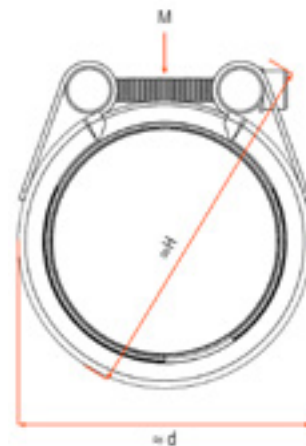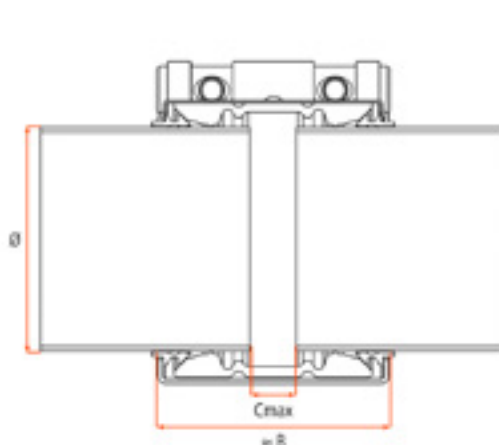





Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S-PG-B-W5-*-315-325	315	325	315/316/318/320/321/323.9	2,5	6	140	40	363	389	M16	160	7.78	1
2-S-PG-B-W5-*-353-363	353	363	353/354/355/355.6/356/358/360/362	2,5	6	140	40	401	427	M16	160	8.54	1
2-S-PG-C-W5-*-398-408	398	408	398/399/400/403/404/405/406/406.4/408	2,5	6	142	40	446	472	M16	160	10.49	1
2-S2-PG-C-W5-*-440-460	440	460	440/441/442/444/448/450/452/453/454/456/457.2/459/460	2,5	6	142	40	498	524	M16	160	13.10	1
2-S2-PG-C-W5-*-495-515	495	515	496/498/500/504/506/507/508/510/512/514/515	2,5	6	142	40	553	579	M16	160	14.48	1
2-S3-PG-G-W5-*-540-570	540	570	540/542/543/546/548/549/550/558/559/560/564/568	2,5	6	146	40	608	634	M16	160	21.13	1
2-S4-PG-G-W5-*-600-640	600	640	600/605/606/609.6/610/612/613.7/620/622/630/632/633/634/635/640	2,5	6	146	40	678	704	M16	160	23.47	1

\*Article Nr.: E for EPDM. N for NBR and V for Viton

# UNI-COMBIGRIP L Ø 39 - 172 MM / PN 10

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4404 / 316 L & 1.4310 / 301	1.4404 / 316 L & 1.4310 / 301	1.4404 / 316 L & 1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	
Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

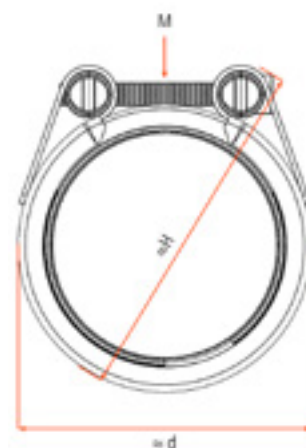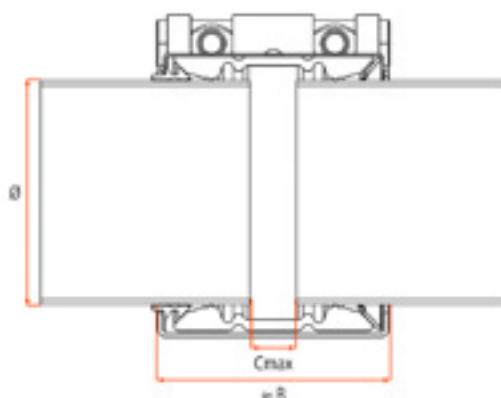



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-L-CG-W5-*-39-43	39	43	42.4/40	10	16	60	15	66	104	M8	25	0.40	10
1-L-CG-W5-*-47-52,5	47.5	52.5	48.3/50	10	16	60	15	74	112	M8	25	0.50	10
1-L-CG-W5-*-58-64	58	64	60.3/63	10	16	75	25	85	125	M8	25	0.60	10
1-L-CG-W5-*-72-80	72	80	73/75/76.1/79.5	10	16	95	30	108	164	M10	40	1.40	10
1-L-CG-W5-*-88-96	88	96	88.9/90	10	16	95	30	124	170	M10	40	1.50	10
1-L-CG-W5-*-104-112	104	112	104.8/108/110	10	16	95	30	141	187	M10	40	1.70	10
1-L-CG-W5-*-108-115	108	115	110/114.3	10	16	95	30	141	187	M10	40	1.70	10
1-L-CG-W5-*-122-130	122	130	125/127/129	10	16	95	30	158	202	M10	40	1.80	10
1-L-CG-W5-*-137-145	137	145	139.7/140/141.3/141.6	10	16	110	40	186	238	M12	65	3.50	5
1-L-CG-W5-*-157-165	157	165	159/160	10	16	110	40	205	255	M12	65	3.70	5
1-L-CG-W5-*-164-172	164	172	165/168.3	10	16	110	40	212	262	M12	65	3.80	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-COMBIGRIP S Ø 39 - 172 MM / PN 10

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4404 / 316 L & 1.4310 / 301	1.4404 / 316 L & 1.4310 / 301	1.4404 / 316 L & 1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	
Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

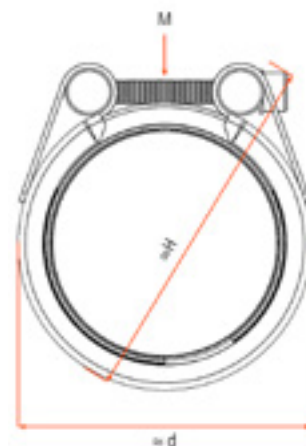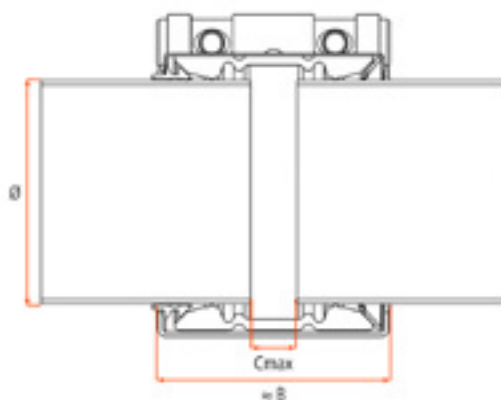



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-S-CG-W5-*-39-43	39	43	42.4/40	10	16	60	15	66	104	M8	25	0.40	10
1-S-CG-W5-*-47-52,5	47.5	52.5	48.3/50	10	16	60	15	74	112	M8	25	0.50	10
1-S-CG-W5-*-58-64	58	64	60.3/63	10	16	75	25	85	125	M8	25	0.60	10
1-S-CG-W5-*-72-80	72	80	73/75/76.1/79.5	10	16	95	30	108	164	M10	40	1.40	10
1-S-CG-W5-*-88-96	88	96	88.9/90	10	16	95	30	124	170	M10	40	1.50	10
1-S-CG-W5-*-104-112	104	112	104.8/108/110	10	16	95	30	141	187	M10	40	1.70	10
1-S-CG-W5-*-108-115	108	115	110/114.3	10	16	95	30	141	187	M10	40	1.70	10
1-S-CG-W5-*-122-130	122	130	125/127/129	10	16	95	30	158	202	M10	40	1.80	10
1-S-CG-W5-*-137-145	137	145	139.7/140/141.3/141.6	10	16	110	40	186	238	M12	65	3.50	5
1-S-CG-W5-*-157-165	157	165	159/160	10	16	110	40	205	255	M12	65	3.70	5
1-S-CG-W5-*-164-172	164	172	165/168.3	10	16	110	40	212	262	M12	65	3.80	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-COMBIGRIP S Ø 175 - 363 MM / PN 10

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4404 / 316 L & 1.4310 / 301	1.4404 / 316 L & 1.4310 / 301	1.4404 / 316 L & 1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	
Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

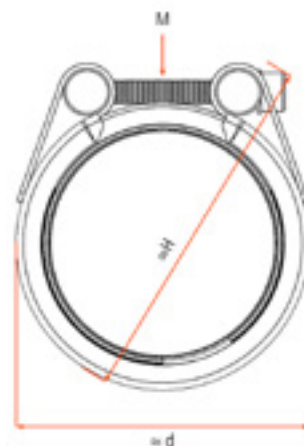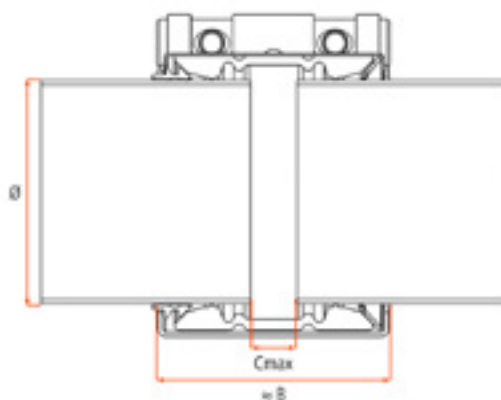



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S-CG-C-W5*-175-185	175	185	180	10	16	142	40	223	249	M16	160	6.23	1
2-S-CG-C-W5*-198-208	198	208	200/202/203/204/205/206/208	10	16	142	40	246	272	M16	160	6.80	1
2-S-CG-C-W5*-218-228	218	228	219.1/220/222/224/225/226/228	10	16	142	40	266	292	M16	160	7.30	1
2-S-CG-C-W5*-250-260	250	260	250/252/254/255/256/257/259	10	16	142	40	298	324	M16	160	8.10	1
2-S-CG-C-W5*-272-282	272	282	272/273.1/274/275/278/280	10	16	142	40	320	346	M16	160	8.65	1
2-S-CG-G-W5*-315-325	315	325	315/316/318/320/321/323.9	10	16	146	40	363	389	M16	160	11.11	1
2-S-CG-G-W5*-353-363	353	363	353/354/355/355.6/356/358/360/362	10	16	146	40	401	427	M16	160	12.20	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton



# UNI-COMBIGRIP LE Ø 72 - 172 MM / PN 6

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4404 / 316 L & 1.4310 / 301	1.4404 / 316 L & 1.4310 / 301	1.4404 / 316 L & 1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	
Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

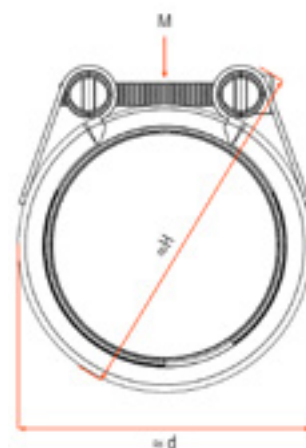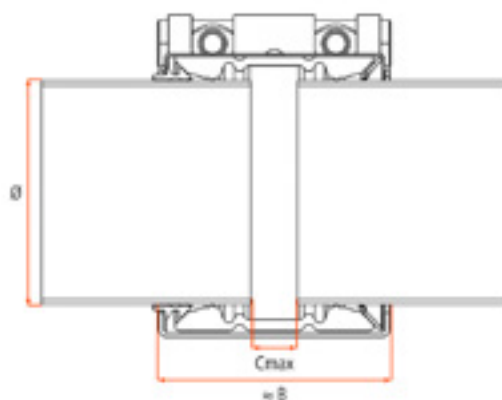



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-LE-CG-W5-*-72-80	72	80	73/75/76.1/79.5	6	10	95	30	108	164	M10	40	1.00	10
1-LE-CG-W5-*-88-96	88	96	88.9/90	6	10	95	30	124	170	M10	40	1.00	10
1-LE-CG-W5-*-104-112	104	112	104.8/108/110	6	10	95	30	141	187	M10	40	1.10	10
1-LE-CG-W5-*-108-115	108	115	108/110/114.3	6	10	95	30	141	187	M10	40	1.20	10
1-LE-CG-W5-*-122-130	122	130	125/127/129	6	10	95	30	158	202	M10	40	1.20	10
1-LE-CG-W5-*-137-145	137	145	139.7/140/141.3/141.6	6	10	110	40	186	238	M12	65	2.20	5
1-LE-CG-W5-*-157-165	157	165	159/160	6	10	110	40	205	255	M12	65	2.30	5
1-LE-CG-W5-*-164-172	164	172	165/168.3	6	10	110	40	212	262	M12	65	2.40	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-COMBIGRIP SE Ø 72 - 172 MM / PN 6

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4404 / 316 L & 1.4310 / 301	1.4404 / 316 L & 1.4310 / 301	1.4404 / 316 L & 1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	
Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

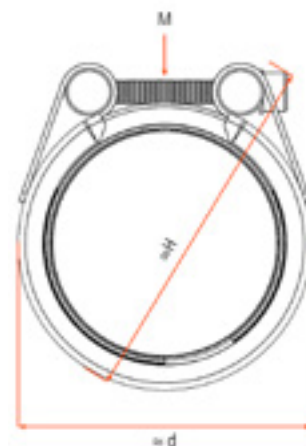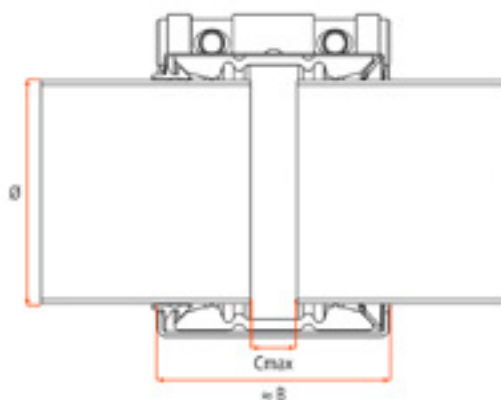



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-SE-CG-W5-*-72-80	72	80	73/75/76.1/79.5	6	10	95	30	108	164	M10	40	1.00	10
1-SE-CG-W5-*-88-96	88	96	88.9/90	6	10	95	30	124	170	M10	40	1.00	10
1-SE-CG-W5-*-104-112	104	112	104.8/108/110	6	10	95	30	141	187	M10	40	1.10	10
1-SE-CG-W5-*-108-115	108	115	108/110/114.3	6	10	95	30	141	187	M10	40	1.20	10
1-SE-CG-W5-*-122-130	122	130	125/127/129	6	10	95	30	158	202	M10	40	1.20	10
1-SE-CG-W5-*-137-145	137	145	139.7/140/141.3/141.6	6	10	110	40	186	238	M12	65	2.20	5
1-SE-CG-W5-*-157-165	157	165	159/160	6	10	110	40	205	255	M12	65	2.30	5
1-SE-CG-W5-*-164-172	164	172	165/168.3	6	10	110	40	212	262	M12	65	2.40	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-COMBIGRIP S Ø 175 - 515 MM / PN 6

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4404 / 316 L & 1.4310 / 301	1.4404 / 316 L & 1.4310 / 301	1.4404 / 316 L & 1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	
Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances
- + Article Nr. S2 = 2 pieces

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

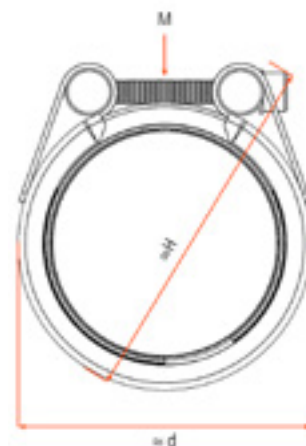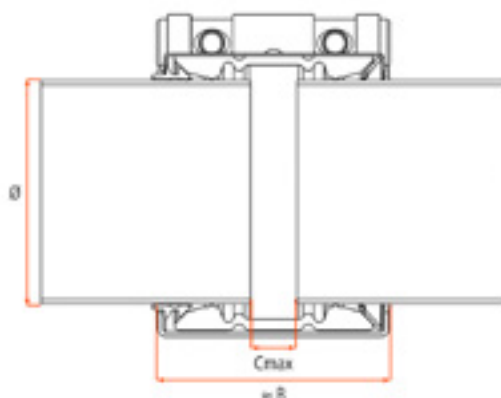



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S-CG-B-W5*-175-185	175	185	180	6	10	140	40	223	249	M16	160	4.98	1
2-S-CG-B-W5*-198-208	198	208	200/202/203/204/205/206/208	6	10	140	40	246	272	M16	160	5.44	1
2-S-CG-B-W5*-218-228	218	228	219.1/220/222/224/225/226/228	6	10	140	40	266	292	M16	160	5.84	1
2-S-CG-B-W5*-250-260	250	260	250/252/254/255/256/257/259	6	10	140	40	298	324	M16	160	6.48	1
2-S-CG-B-W5*-272-282	272	282	272/273.1/274/275/278/280	6	10	140	40	320	346	M16	160	6.92	1
2-S-CG-C-W5*-315-325	315	325	315/316/318/320/321/323.9	6	10	142	40	363	389	M16	160	8.64	1
2-S-CG-C-W5*-353-363	353	363	353/354/355/355.6/356/358/360/362	6	10	142	40	401	427	M16	160	9.49	1
2-S-CG-G-W5*-398-408	398	408	398/399/400/403/404/405/406/406.4/408	6	10	146	40	446	472	M16	160	13.49	1
2-S2-CG-G-W5*-440-460	440	460	440/441/442/444/448/450/452/453/454/456/457.2/459/460	6	10	146	40	498	524	M16	160	17.47	1
2-S2-CG-G-W5*-495-515	495	515	496/498/500/504/506/507/508/510/512/514/515	6	10	146	40	553	579	M16	160	19.30	1

\*Article Nr.: E for EPDM. N for NBR and V for Viton

# UNI-COMBIGRIP S Ø 315 - 640 MM / PN 2.5

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Anchoring rings	1.4404 / 316 L & 1.4310 / 301	1.4404 / 316 L & 1.4310 / 301	1.4404 / 316 L & 1.4310 / 301	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	
Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances
- + Article Nr. S2 = 2 pieces, S3 = 3 pieces, S4 = 4 pieces

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

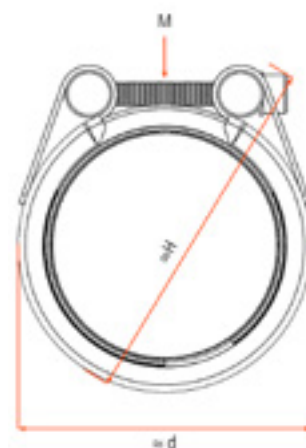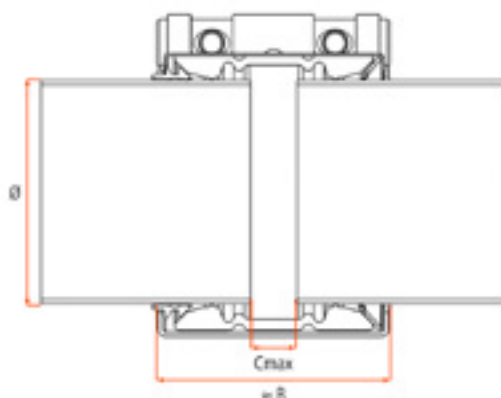





Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S-CG-B-W5*-315-325	315	325	315/316/318/320/321/323.9	2,5	6	140	40	363	389	M16	160	7.78	1
2-S-CG-B-W5*-353-363	353	363	353/354/355/355.6/356/358/360/362	2,5	6	140	40	401	427	M16	160	8.54	1
2-S-CG-C-W5*-398-408	398	408	398/399/400/403/404/405/406/406.4/408	2,5	6	142	40	446	472	M16	160	10.49	1
2-S2-CG-C-W5*-440-460	440	460	440/441/442/444/448/450/452/453/454/456/457.2/459/460	2,5	6	142	40	498	524	M16	160	13.10	1
2-S2-CG-C-W5*-495-515	495	515	496/498/500/504/506/507/508/510/512/514/515	2,5	6	142	40	553	579	M16	160	14.48	1
2-S3-CG-G-W5*-540-570	540	570	540/542/543/546/548/549/550/558/559/560/564/568	2,5	6	146	40	608	634	M16	160	21.13	1
2-S4-CG-G-W5*-600-640	600	640	600/605/606/609.6/610/612/613.7/620/622/630/632/633/634/635/640	2,5	6	146	40	678	704	M16	160	23.47	1

\*Article Nr.: E for EPDM. N for NBR and V for Viton

# UNI-FLEX L Ø 21 - 172 MM / PN 16

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

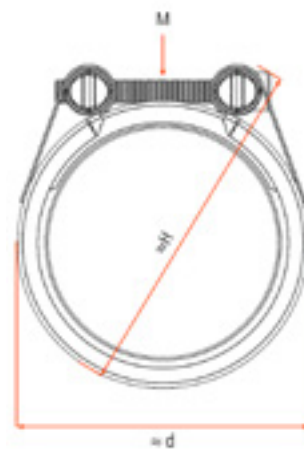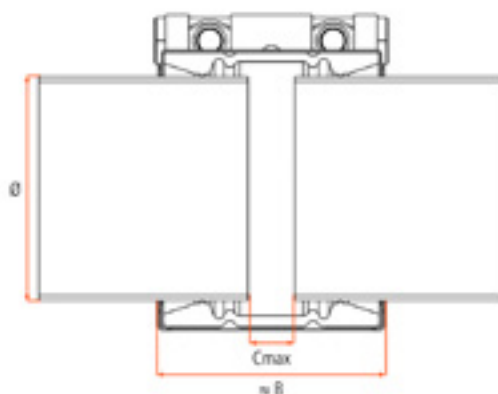



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-L-F-W5-*-21-24	21	24	21.3/21.6	16	25	45	10	46	76	M6	3	0.20	10
1-L-F-W5-*-26-29	26	29	26.9/28	16	25	45	10	46	76	M6	3	0.20	10
1-L-F-W5-*-29-32	29	32	30	16	25	45	10	54	84	M6	3	0.20	10
1-L-F-W5-*-33-36	33	36	33.7/35	16	25	45	10	54	84	M6	3	0.20	10
1-L-F-W5-*-36-39	36	39	38	16	25	60	15	66	104	M8	5	0.40	10
1-L-F-W5-*-39-43	39	43	42.4	16	25	60	15	66	104	M8	5	0.40	10
1-L-F-W5-*-43-47,5	43	47.5	44.5	16	25	60	15	74	112	M8	5	0.40	10
1-L-F-W5-*-47,5-52,5	47.5	52.5	48.3	16	25	60	15	74	112	M8	5	0.40	10
1-L-F-W5-*-52,5-58	52.5	58	54/57	16	25	75	25	85	125	M8	5	0.60	10
1-L-F-W5-*-58-64	58	64	60.3/63	16	25	75	25	85	125	M8	5	0.60	10
1-L-F-W5-*-64-72	64	72	66.6/68/69/70	16	25	95	30	108	164	M10	10	1.00	10
1-L-F-W5-*-72-80	72	80	73/76.1/79.5	16	25	95	30	108	164	M10	10	1.00	10
1-L-F-W5-*-80-88	80	88	84	16	25	95	30	124	170	M10	10	1.00	10
1-L-F-W5-*-88-96	88	96	88.9	16	25	95	30	124	170	M10	10	1.00	10
1-L-F-W5-*-97-105	97	105	98/100.6/101.6/104	16	25	95	30	141	187	M10	10	1.10	10
1-L-F-W5-*-104-112	104	112	104.8/108/110	16	25	95	30	141	187	M10	10	1.10	10
1-L-F-W5-*-112-120	112	120	114.3/118	16	25	95	30	158	202	M10	12.5	1.20	10
1-L-F-W5-*-122-130	122	130	125/127/129	16	25	95	30	158	202	M10	12.5	1.20	10
1-L-F-W5-*-129-137	129	137	130.2/131/133	16	25	110	40	178	230	M12	20	2.10	5
1-L-F-W5-*-137-145	137	145	139.7/141.3/141.6	16	25	110	40	186	238	M12	25	2.20	5
1-L-F-W5-*-149-157	149	157	154/155	16	25	110	40	197	249	M12	30	2.30	5
1-L-F-W5-*-157-165	157	165	159	16	25	110	40	205	255	M12	30	2.30	5
1-L-F-W5-*-164-172	164	172	165/168.3	16	25	110	40	212	262	M12	30	2.40	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-FLEX S Ø 21 - 172 MM / PN 16

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

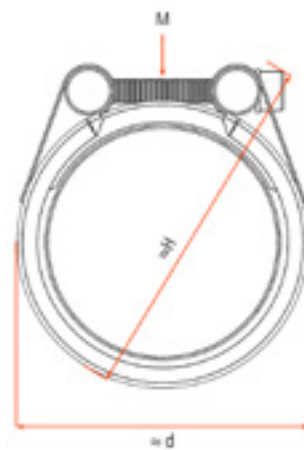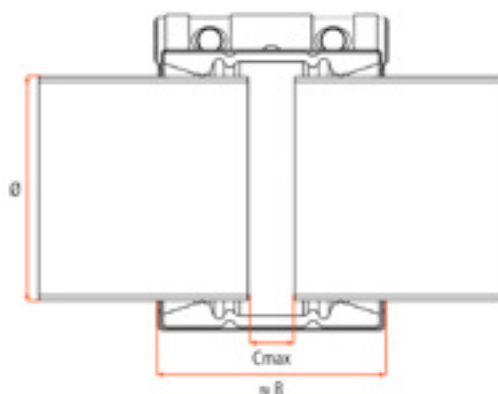



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-S-F-W5-*-21-24	21	24	21.3/21.6	16	25	45	10	46	76	M6	3	0.20	10
1-S-F-W5-*-26-29	26	29	26.9/28	16	25	45	10	46	76	M6	3	0.20	10
1-S-F-W5-*-29-32	29	32	30	16	25	45	10	54	84	M6	3	0.20	10
1-S-F-W5-*-33-36	33	36	33.7/35	16	25	45	10	54	84	M6	3	0.20	10
1-S-F-W5-*-36-39	36	39	38	16	25	60	15	66	104	M8	5	0.40	10
1-S-F-W5-*-39-43	39	43	42.4	16	25	60	15	66	104	M8	5	0.40	10
1-S-F-W5-*-43-47,5	43	47.5	44.5	16	25	60	15	74	112	M8	5	0.40	10
1-S-F-W5-*-47,5-52,5	47.5	52.5	48.3	16	25	60	15	74	112	M8	5	0.40	10
1-S-F-W5-*-52,5-58	52.5	58	54/57	16	25	75	25	85	125	M8	5	0.60	10
1-S-F-W5-*-58-64	58	64	60.3/63	16	25	75	25	85	125	M8	5	0.60	10
1-S-F-W5-*-64-72	64	72	66.6/68/69/70	16	25	95	30	108	164	M10	10	1.00	10
1-S-F-W5-*-72-80	72	80	73/76.1/79.5	16	25	95	30	108	164	M10	10	1.00	10
1-S-F-W5-*-80-88	80	88	84	16	25	95	30	124	170	M10	10	1.00	10
1-S-F-W5-*-88-96	88	96	88.9	16	25	95	30	124	170	M10	10	1.00	10
1-S-F-W5-*-97-105	97	105	98/100.6/101.6/104	16	25	95	30	141	187	M10	10	1.10	10
1-S-F-W5-*-104-112	104	112	104.8/108/110	16	25	95	30	141	187	M10	10	1.10	10
1-S-F-W5-*-112-120	112	120	114.3/118	16	25	95	30	158	202	M10	12.5	1.20	10
1-S-F-W5-*-122-130	122	130	125/127/129	16	25	95	30	158	202	M10	12.5	1.20	10
1-S-F-W5-*-129-137	129	137	130.2/131/133	16	25	110	40	178	230	M12	20	2.10	5
1-S-F-W5-*-137-145	137	145	139.7/141.3/141.6	16	25	110	40	186	238	M12	25	2.20	5
1-S-F-W5-*-149-157	149	157	154/155	16	25	110	40	197	249	M12	30	2.30	5
1-S-F-W5-*-157-165	157	165	159	16	25	110	40	205	255	M12	30	2.30	5
1-S-F-W5-*-164-172	164	172	165/168.3	16	25	110	40	212	262	M12	30	2.40	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-FLEX S Ø 188 - 745 MM / PN 16

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

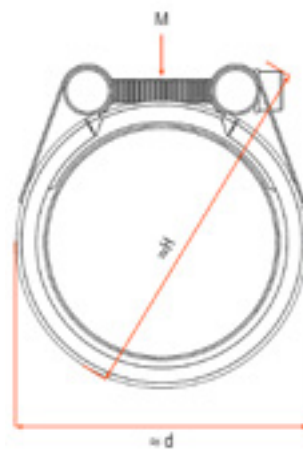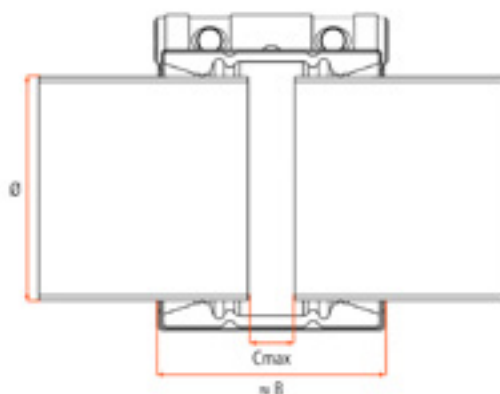



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S-F-B-W5*-188-198	188	198	190/191/193.7/195/196/197	16	25	140	40	236	262	M12	30	5.04	1
2-S-F-B-W5*-201-211	201	211	202/203/204/205/206/208/210/211	16	25	140	40	249	275	M12	30	5.19	1
2-S-F-B-W5*-213-223	213	223	215/216/217/219.1/220/222	16	25	140	40	261	287	M12	30	5.34	1
2-S-F-B-W5*-224-234	224	234	224/225/226/228/229/230/232/234	16	25	140	40	272	298	M12	30	5.47	1
2-S-F-B-W5*-237-247	237	247	238/240/241/242/244/244.5/246	16	25	140	40	285	311	M12	30	5.63	1
2-S-F-B-W5*-250-260	250	260	250/252/254/255/256/257/259	16	25	140	40	298	324	M12	30	5.79	1
2-S-F-B-W5*-266-276	266	276	268/267/271/272/273.1/274/275	16	25	140	40	314	340	M12	30	5.98	1
2-S-F-C-W5*-280-290	280	290	280/284/286/287/288/289	16	25	142	40	328	354	M16	30	7.58	1
2-S-F-C-W5*-291-301	291	301	292/295/296/298/300	16	25	142	40	339	365	M16	30	7.76	1
2-S-F-C-W5*-304-314	304	314	304/305/306/308/310/311/313	16	25	142	40	352	378	M16	30	7.97	1
2-S-F-C-W5*-318-328	318	328	318/320/321/323.9/326/327	16	25	142	40	366	392	M16	30	8.19	1
2-S-F-C-W5*-330-340	330	340	330/333.8/334/336/337/339/340	16	25	142	40	378	404	M16	50	8.39	1
2-S-F-C-W5*-343-353	343	353	343/345/346/348/350/352	16	25	142	40	391	417	M16	50	8.60	1
2-S-F-C-W5*-353-363	353	363	353/354/355/355.6/356/358/360/362	16	25	142	40	401	427	M16	50	8.76	1
2-S-F-G-W5*-364-374	364	374	367/368/372	16	25	146	40	412	438	M16	50	12.61	1
2-S-F-G-W5*-377-387	377	387	378/380/382/384/385/386	16	25	146	40	425	451	M16	50	12.94	1
2-S-F-G-W5*-390-400	390	400	392/394/395/396/398/399/400	16	25	146	40	438	464	M16	50	13.26	1
2-S-F-G-W5*-403-413	403	413	403/404/405/406/406.4/408/410/412	16	25	146	40	451	477	M16	50	13.59	1
2-S-F-G-W5*-415-425	415	425	419/420/421	16	25	146	40	463	489	M16	50	13.89	1
2-S-F-G-W5*-425-435	425	435	426/427/428/429/430/432/433/434	16	25	146	40	473	499	M16	50	14.14	1
2-S-F-G-W5*-441-451	441	451	441/442/444/448/450	16	25	146	40	489	515	M16	50	14.54	1
2-S-F-G-W5*-454-464	454	464	454/456/457.2/459/460/463	16	25	146	40	502	528	M16	50	14.87	1
2-S-F-G-W5*-463-473	463	473	464/468/470	16	25	146	40	511	537	M16	50	15.09	1
2-S-F-G-W5*-479-489	479	489	480/486/488	16	25	146	40	527	553	M16	50	15.49	1
2-S-F-G-W5*-491-501	491	501	492/494/496/498/500	16	25	146	40	539	565	M16	50	15.80	1
2-S-F-G-W5*-506-516	506	516	506/507/508/510/512/514/515	16	25	146	40	554	580	M16	50	16.17	1
2-S-F-G-W5*-523-533	523	533	524/526/530/532	16	25	146	40	575	603	M16	60	16.60	1
2-S-F-G-W5*-534-544	534	544	537/538/540/542/543	16	25	146	40	586	614	M16	60	16.87	1
2-S-F-G-W5*-549-559	549	559	549/550/558/559	16	25	146	40	601	629	M16	60	17.25	1
2-S-F-G-W5*-560-570	560	570	560/564/568	16	25	146	40	612	640	M16	60	17.53	1
2-S-F-G-W5*-574-584	574	584	574/576/582/583	16	25	146	40	626	654	M16	60	17.88	1
2-S-F-G-W5*-603-613	603	613	605/606/609.6/610/612	16	25	146	40	655	683	M16	60	18.60	1
2-S-F-G-W5*-613-623	613	623	613.7/620/622	16	25	146	40	665	693	M16	70	18.85	1
2-S-F-G-W5*-631-641	631	641	632/633/634/635/640	16	25	146	40	683	711	M16	70	19.31	1
2-S-F-G-W5*-651-661	651	661	651/654/655/658/659/660	16	25	146	40	703	731	M16	70	19.81	1
2-S-F-G-W5*-679-689	679	689	680/686/688	16	25	146	40	731	759	M16	70	20.51	1
2-S-F-G-W5*-691-701	691	701	691/698/700	16	25	146	40	743	771	M16	70	20.81	1
2-S-F-G-W5*-703-713	703	713	705/710/711.2	16	25	146	40	755	783	M16	70	21.11	1
2-S-F-G-W5*-720-730	720	730	720/726/729	16	25	146	40	772	800	M16	70	21.54	1
2-S-F-G-W5*-735-745	735	745	735/738/743/744	16	25	146	40	787	815	M16	70	21.91	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-FLEX S Ø 762 - 930 MM / PN 16

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	


## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances
- + Article Nr. S2 = 2 pieces

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

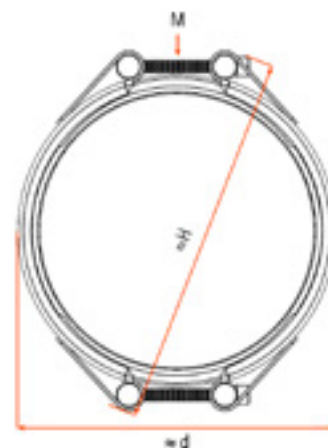





Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S2-F-G-W5-*-762-782	762	782	762/768/769/770/773/780	16	25	146	40	824	852	M16	70	26.08	1
2-S2-F-G-W5-*-788-808	788	808	790/798/800/801/806/ 807.2/808	16	25	146	40	850	878	M16	70	26.73	1
2-S2-F-G-W5-*-812-832	812	832	812.8/820/822/824/826/830/832	16	25	146	40	874	902	M16	70	27.33	1
2-S2-F-G-W5-*-834-854	834	854	840/842/848/852	16	25	146	40	896	924	M16	80	27.88	1
2-S2-F-G-W5-*-862-882	862	882	864/868/869/879/880	16	25	146	40	924	952	M16	80	28.58	1
2-S2-F-G-W5-*-888-908	888	908	891/896/900/903/905.8	16	25	146	40	950	978	M16	80	29.23	1
2-S2-F-G-W5-*-910-930	910	930	912.4/914.4/915/920/924/927/928	16	25	146	40	972	1000	M16	80	29.79	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-FLEX S Ø 188 - 745 MM / PN 10

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

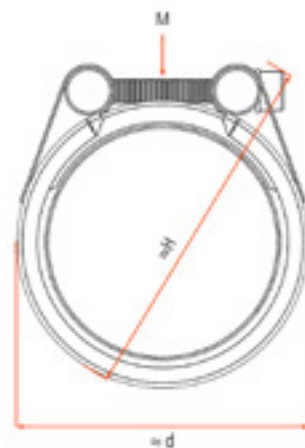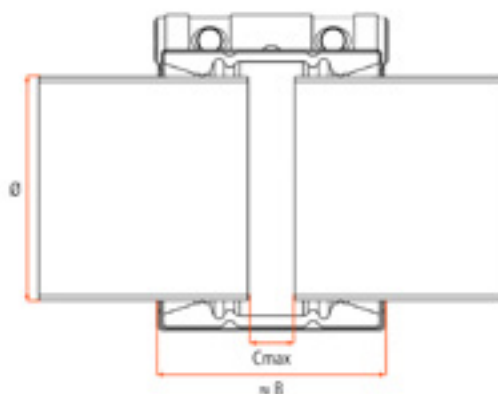



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S-F-A-W5-*-188-198	188	198	190/191/193.7/195/196/197	10	16	138	40	236	262	M12	30	3.95	1
2-S-F-A-W5-*-201-211	201	211	202/203/204/205/206/208/210/211	10	16	138	40	249	275	M12	30	4.05	1
2-S-F-A-W5-*-213-223	213	223	215/216/217/219.1/220/222	10	16	138	40	261	287	M12	30	4.14	1
2-S-F-A-W5-*-224-234	224	234	224/225/226/228/229/230/232/234	10	16	138	40	272	298	M12	30	4.23	1
2-S-F-A-W5-*-237-247	237	247	238/240/241/242/244/244.5/246	10	16	138	40	285	311	M12	30	4.33	1
2-S-F-A-W5-*-250-260	250	260	250/252/254/255/256/257/259	10	16	138	40	298	324	M12	30	4.44	1
2-S-F-A-W5-*-266-276	266	276	268/267/271/272/273.1/274/275	10	16	138	40	314	340	M12	30	4.56	1
2-S-F-B-W5-*-280-290	280	290	280/284/286/287/288/289	10	16	140	40	328	354	M12	30	6.15	1
2-S-F-B-W5-*-291-301	291	301	292/295/296/298/300	10	16	140	40	339	365	M12	30	6.28	1
2-S-F-B-W5-*-304-314	304	314	304/305/306/308/310/311/313	10	16	140	40	352	378	M12	30	6.44	1
2-S-F-B-W5-*-318-328	318	328	318/320/321/323.9/326/327	10	16	140	40	366	392	M12	30	6.61	1
2-S-F-B-W5-*-330-340	330	340	330/333.8/334/336/337/339/340	10	16	140	40	378	404	M12	40	6.75	1
2-S-F-B-W5-*-343-353	343	353	343/345/346/348/350/352	10	16	140	40	391	417	M12	40	6.91	1
2-S-F-B-W5-*-353-363	353	363	353/354/355/355.6/356/358/360/362	10	16	140	40	401	427	M12	40	7.03	1
2-S-F-C-W5-*-364-374	364	374	367/368/372	10	16	142	40	412	438	M12	40	8.93	1
2-S-F-C-W5-*-377-387	377	387	378/380/382/384/385/386	10	16	142	40	425	451	M12	40	9.14	1
2-S-F-C-W5-*-390-400	390	400	392/394/395/396/398/399/400	10	16	142	40	438	464	M12	40	9.35	1
2-S-F-C-W5-*-403-413	403	413	403/404/405/406/406.4/408/410/412	10	16	142	40	451	477	M12	40	9.56	1
2-S-F-C-W5-*-415-425	415	425	419/420/421	10	16	142	40	463	489	M12	40	9.75	1
2-S-F-C-W5-*-425-435	425	435	426/427/428/429/430/432/433/434	10	16	142	40	473	499	M12	40	9.91	1
2-S-F-C-W5-*-441-451	441	451	441/442/444/448/450	10	16	142	40	489	515	M12	40	10.17	1
2-S-F-C-W5-*-454-464	454	464	454/456/457.2/459/460/463	10	16	142	40	502	528	M12	40	10.38	1
2-S-F-C-W5-*-463-473	463	473	464/468/470	10	16	142	40	511	537	M12	40	10.53	1
2-S-F-C-W5-*-479-489	479	489	480/486/488	10	16	142	40	527	553	M12	40	10.78	1
2-S-F-C-W5-*-491-501	491	501	492/494/496/498/500	10	16	142	40	539	565	M12	40	10.98	1
2-S-F-C-W5-*-506-516	506	516	506/507/508/510/512/514/515	10	16	142	40	554	580	M12	40	11.22	1
2-S-F-C-W5-*-523-533	523	533	524/526/530/532	10	16	142	40	575	603	M16	50	11.49	1
2-S-F-C-W5-*-534-544	534	544	537/538/540/542/543	10	16	142	40	586	614	M16	50	11.67	1
2-S-F-C-W5-*-549-559	549	559	549/550/558/559	10	16	142	40	601	629	M16	50	11.91	1
2-S-F-C-W5-*-560-570	560	570	560/564/568	10	16	142	40	612	640	M16	50	12.09	1
2-S-F-C-W5-*-574-584	574	584	574/576/582/583	10	16	142	40	626	654	M16	50	12.31	1
2-S-F-C-W5-*-603-613	603	613	605/606/609.6/610/612	10	16	142	40	655	683	M16	50	12.78	1
2-S-F-C-W5-*-613-623	613	623	613.7/620/622	10	16	142	40	665	693	M16	60	12.94	1
2-S-F-C-W5-*-631-641	631	641	632/633/634/635/640	10	16	142	40	683	711	M16	60	13.23	1
2-S-F-C-W5-*-651-661	651	661	651/654/655/658/659/660	10	16	142	40	703	731	M16	60	13.55	1
2-S-F-C-W5-*-679-689	679	689	680/686/688	10	16	142	40	731	759	M16	60	14.00	1
2-S-F-C-W5-*-691-701	691	701	691/698/700	10	16	142	40	743	771	M16	60	14.19	1
2-S-F-C-W5-*-703-713	703	713	705/710/711.2	10	16	142	40	755	783	M16	60	14.39	1
2-S-F-C-W5-*-720-730	720	730	720/726/729	10	16	142	40	772	800	M16	60	14.66	1
2-S-F-C-W5-*-735-745	735	745	735/738/743/744	10	16	142	40	787	815	M16	60	14.90	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-FLEX S Ø 762 - 1452 MM / PN 10

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances
- + Article Nr. S2 = 2 pieces, S3 = 3 pieces

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

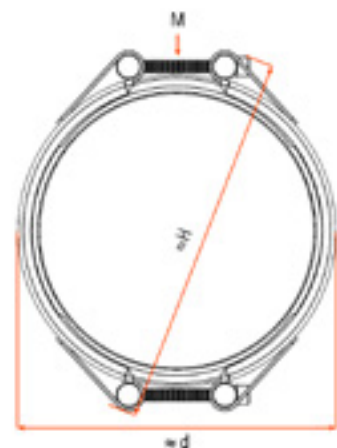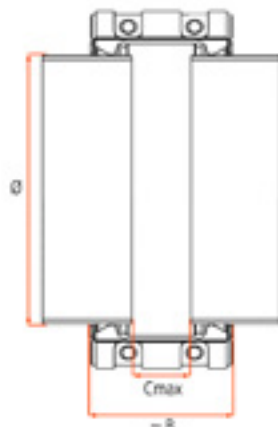



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S2-F-C-W5-*.762-782	762	782	762/768/769/770/773/780	10	16	142	40	824	852	M16	60	18.41	1
2-S2-F-C-W5-*.788-808	788	808	790/798/800/801/806/ 807.2/808	10	16	142	40	850	878	M16	60	18.83	1
2-S2-F-C-W5-*.812-832	812	832	812.8/820/822/824/826/830/832	10	16	142	40	874	902	M16	60	19.22	1
2-S2-F-C-W5-*.834-854	834	854	840/842/848/852	10	16	142	40	896	924	M16	60	19.57	1
2-S2-F-C-W5-*.862-882	862	882	864/868/869/879/880	10	16	142	40	924	952	M16	60	20.02	1
2-S2-F-C-W5-*.888-908	888	908	891/896/900/903/905.8	10	16	142	40	950	978	M16	60	20.44	1
2-S2-F-C-W5-*.910-930	910	930	912.4/914.4/915/920/924/927/928	10	16	142	40	972	1000	M16	60	20.79	1
2-S2-F-G-W5-*.942-962	942	962	945/950/951/952/956/960	10	16	146	40	1004	1032	M16	60	30.59	1
2-S2-F-G-W5-*.967-987	967	987	970/977/978/984.5	10	16	146	40	1029	1057	M16	60	31.21	1
2-S2-F-G-W5-*.990-1010	990	1010	990/992/996/1000/1008	10	16	146	40	1052	1080	M16	60	31.79	1
2-S2-F-G-W5-*.1010-1030	1010	1030	1015/1016/1020/1024/1027	10	16	146	40	1072	1100	M16	60	32.29	1
2-S2-F-G-W5-*.1050-1070	1050	1070	1054/1057/1068.3	10	16	146	40	1116	1146	M16	80	33.30	1
2-S2-F-G-W5-*.1082-1102	1082	1102	1086/1090.2/1100	10	16	146	40	1148	1178	M16	80	34.10	1
2-S2-F-G-W5-*.1110-1130	1110	1130	1118/1120.6/1128	10	16	146	40	1176	1206	M16	80	34.80	1
2-S3-F-G-W5-*.1147-1177	1147	1177	1152/1167/1172.5/1174	10	16	146	40	1223	1253	M16	80	39.21	1
2-S3-F-G-W5-*.1201-1231	1201	1231	1220/1228	10	16	146	40	1277	1307	M16	80	40.57	1
2-S3-F-G-W5-*.1250-1280	1250	1280	1255/1256/1261/1276.6	10	16	146	40	1326	1356	M16	80	41.80	1
2-S3-F-G-W5-*.1340-1370	1340	1370	1358	10	16	146	40	1416	1446	M16	80	44.05	1
2-S3-F-G-W5-*.1422-1452	1422	1452	1422/1449	10	16	146	40	1498	1528	M16	80	46.11	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-FLEX S Ø 280 - 745 MM / PN 6

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

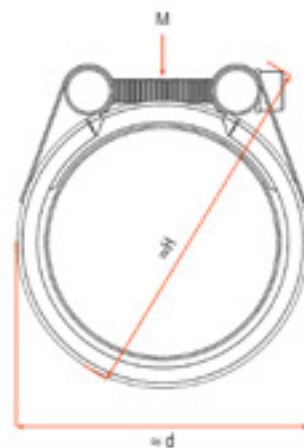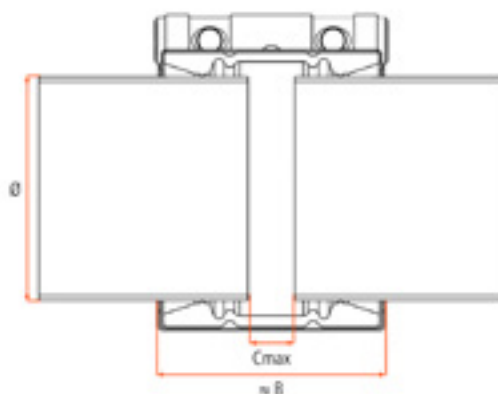



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S-F-A-W5*-280-290	280	290	280/284/286/287/288/289	6	10	138	40	328	354	M12	30	4.67	1
2-S-F-A-W5*-291-301	291	301	292/295/296/298/300	6	10	138	40	339	365	M12	30	4.76	1
2-S-F-A-W5*-304-314	304	314	304/305/306/308/310/311/313	6	10	138	40	352	378	M12	30	4.86	1
2-S-F-A-W5*-318-328	318	328	318/320/321/323.9/326/327	6	10	138	40	366	392	M12	30	4.97	1
2-S-F-A-W5*-330-340	330	340	330/333.8/334/336/337/339/340	6	10	138	40	378	404	M12	40	5.07	1
2-S-F-A-W5*-343-353	343	353	343/345/346/348/350/352	6	10	138	40	391	417	M12	40	5.17	1
2-S-F-A-W5*-353-363	353	363	353/354/355/355.6/356/358/360/362	6	10	138	40	401	427	M12	40	5.25	1
2-S-F-A-W5*-364-374	364	374	367/368/372	6	10	138	40	412	438	M12	40	5.34	1
2-S-F-A-W5*-377-387	377	387	378/380/382/384/385/386	6	10	138	40	425	451	M12	40	5.44	1
2-S-F-A-W5*-390-400	390	400	392/394/395/396/398/399/400	6	10	138	40	438	464	M12	40	5.54	1
2-S-F-A-W5*-403-413	403	413	403/404/405/406/406.4/408/410/412	6	10	138	40	451	477	M12	40	5.64	1
2-S-F-A-W5*-415-425	415	425	419/420/421	6	10	138	40	463	489	M12	40	5.74	1
2-S-F-A-W5*-425-435	425	435	426/427/428/429/430/432/433/434	6	10	138	40	473	499	M12	40	5.82	1
2-S-F-A-W5*-441-451	441	451	441/442/444/448/450	6	10	138	40	489	515	M12	40	5.94	1
2-S-F-A-W5*-454-464	454	464	454/456/457.2/459/460/463	6	10	138	40	502	528	M12	40	6.05	1
2-S-F-A-W5*-463-473	463	473	464/468/470	6	10	138	40	511	537	M12	40	6.12	1
2-S-F-A-W5*-479-489	479	489	480/486/488	6	10	138	40	527	553	M12	40	6.24	1
2-S-F-A-W5*-491-501	491	501	492/494/496/498/500	6	10	138	40	539	565	M12	40	6.34	1
2-S-F-A-W5*-506-516	506	516	506/507/508/510/512/514/515	6	10	138	40	554	580	M12	40	6.46	1
2-S-F-B-W5*-523-533	523	533	524/526/530/532	6	10	140	40	575	603	M12	50	9.08	1
2-S-F-B-W5*-534-544	534	544	537/538/540/542/543	6	10	140	40	586	614	M12	50	9.22	1
2-S-F-B-W5*-549-559	549	559	549/550/558/559	6	10	140	40	601	629	M12	50	9.4	1
2-S-F-B-W5*-560-570	560	570	560/564/568	6	10	140	40	612	640	M12	50	9.53	1
2-S-F-B-W5*-574-584	574	584	574/576/582/583	6	10	140	40	626	654	M12	50	9.7	1
2-S-F-B-W5*-603-613	603	613	605/606/609.6/610/612	6	10	140	40	655	683	M12	50	10.05	1
2-S-F-B-W5*-613-623	613	623	613.7/620/622	6	10	140	40	665	693	M12	60	10.17	1
2-S-F-B-W5*-631-641	631	641	632/633/634/635/640	6	10	140	40	683	711	M12	60	10.39	1
2-S-F-B-W5*-651-661	651	661	651/654/655/658/659/660	6	10	140	40	703	731	M12	60	10.63	1
2-S-F-B-W5*-679-689	679	689	680/686/688	6	10	140	40	731	759	M12	60	10.97	1
2-S-F-B-W5*-691-701	691	701	691/698/700	6	10	140	40	743	771	M12	60	11.11	1
2-S-F-B-W5*-703-713	703	713	705/710/711.2	6	10	140	40	755	783	M12	60	11.26	1
2-S-F-B-W5*-720-730	720	730	720/726/729	6	10	140	40	772	800	M12	60	11.46	1
2-S-F-B-W5*-735-745	735	745	735/738/743/744	6	10	140	40	787	815	M12	60	11.65	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-FLEX S Ø 762 - 1471 MM / PN 6

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	


## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances
- + Article Nr. S2 = 2 pieces, S3 = 3 pieces

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

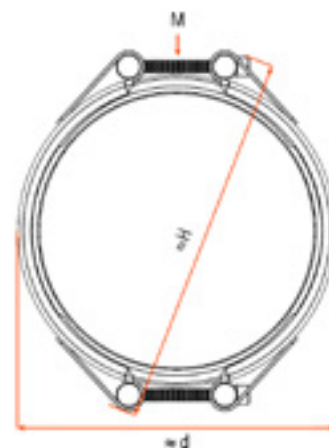





Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S2-F-B-W5-*·762-782	762	782	762/768/769/770/773/780	6	10	140	40	824	852	M12	60	14.74	1
2-S2-F-B-W5-*·788-808	788	808	790/798/800/801/806/ 807.2/808	6	10	140	40	850	878	M12	60	15.05	1
2-S2-F-B-W5-*·812-832	812	832	812.8/820/822/824/826/830/832	6	10	140	40	874	902	M12	60	15.34	1
2-S2-F-B-W5-*·834-854	834	854	840/842/848/852	6	10	140	40	896	924	M12	60	15.61	1
2-S2-F-B-W5-*·862-882	862	882	864/868/869/879/880	6	10	140	40	924	952	M12	60	15.94	1
2-S2-F-B-W5-*·888-908	888	908	891/896/900/903/905.8	6	10	140	40	950	978	M12	60	16.26	1
2-S2-F-B-W5-*·910-930	910	930	912.4/914.4/915/920/924/927/928	6	10	140	40	972	1000	M12	60	16.52	1
2-S2-F-C-W5-*·942-962	942	962	945/950/951/952/956/960	6	10	142	40	1004	1032	M16	60	21.31	1
2-S2-F-C-W5-*·967-987	967	987	970/977/978/984.5	6	10	142	40	1029	1057	M16	60	21.71	1
2-S2-F-C-W5-*·990-1010	990	1010	990/992/996/1000/1008	6	10	142	40	1052	1080	M16	60	22.08	1
2-S2-F-C-W5-*·1010-1030	1010	1030	1015/1016/1020/1024/1027	6	10	142	40	1072	1100	M16	60	22.4	1
2-S2-F-C-W5-*·1050-1070	1050	1070	1054/1057/1068.3	6	10	142	40	1116	1146	M16	80	23.04	1
2-S2-F-C-W5-*·1082-1102	1082	1102	1086/1090.2/1100	6	10	142	40	1148	1178	M16	80	23.56	1
2-S2-F-C-W5-*·1110-1130	1110	1130	1118/1120.6/1128	6	10	142	40	1176	1206	M16	80	24.01	1
2-S3-F-C-W5-*·1147-1177	1147	1177	1152/1167/1172.5/1174	6	10	142	40	1223	1253	M16	80	27.68	1
2-S3-F-C-W5-*·1201-1231	1201	1231	1220/1228	6	10	142	40	1277	1307	M16	80	28.55	1
2-S3-F-C-W5-*·1250-1280	1250	1280	1255/1256/1261/1276.6	6	10	142	40	1326	1356	M16	80	29.34	1
2-S3-F-C-W5-*·1340-1370	1340	1370	1358	6	10	142	40	1416	1446	M16	80	30.79	1
2-S3-F-C-W5-*·1422-1452	1422	1452	1422/1449	6	10	142	40	1498	1528	M16	80	32.11	1
2-S3-F-C-W5-*·1441-1471	1441	1471	1462/1468	6	10	142	40	1517	1547	M16	80	32.41	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-FLEX S Ø 523 - 745 MM / PN 2.5

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	



## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

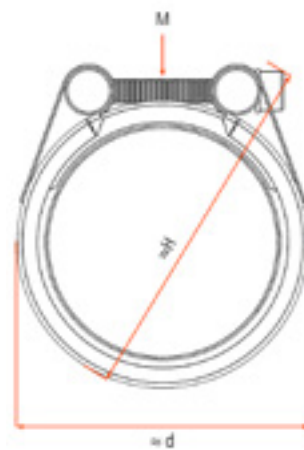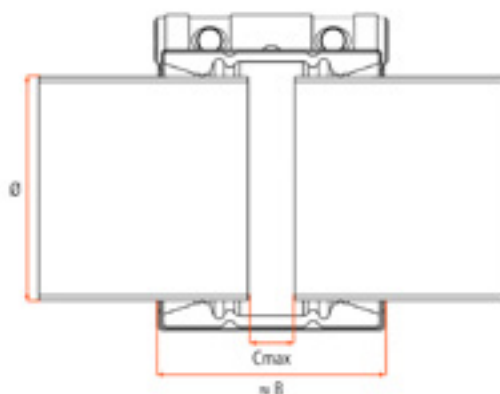



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S-F-A-W5*-523-533	523	533	524/526/530/532	2.5	6	138	40	575	603	M12	60	6.59	1
2-S-F-A-W5*-534-544	534	544	537/538/540/542/543	2.5	6	138	40	586	614	M12	60	6.68	1
2-S-F-A-W5*-549-559	549	559	549/550/558/559	2.5	6	138	40	601	629	M12	60	6.80	1
2-S-F-A-W5*-560-570	560	570	560/564/568	2.5	6	138	40	612	640	M12	60	6.88	1
2-S-F-A-W5*-574-584	574	584	574/576/582/583	2.5	6	138	40	626	654	M12	60	6.99	1
2-S-F-A-W5*-603-613	603	613	605/606/609.6/610/612	2.5	6	138	40	655	683	M12	60	7.22	1
2-S-F-A-W5*-613-623	613	623	613.7/620/622	2.5	6	138	40	665	693	M12	70	7.30	1
2-S-F-A-W5*-631-641	631	641	632/633/634/635/640	2.5	6	138	40	683	711	M12	70	7.44	1
2-S-F-A-W5*-651-661	651	661	651/654/655/658/659/660	2.5	6	138	40	703	731	M12	70	7.60	1
2-S-F-A-W5*-679-689	679	689	680/686/688	2.5	6	138	40	731	759	M12	70	7.82	1
2-S-F-A-W5*-691-701	691	701	691/698/700	2.5	6	138	40	743	771	M12	70	7.92	1
2-S-F-A-W5*-703-713	703	713	705/710/711.2	2.5	6	138	40	755	783	M12	70	8.01	1
2-S-F-A-W5*-720-730	720	730	720/726/729	2.5	6	138	40	772	800	M12	70	8.15	1
2-S-F-A-W5*-735-745	735	745	735/738/743/744	2.5	6	138	40	787	815	M12	70	8.26	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-FLEX S Ø 762 - 2090 MM / PN 2.5

Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	


## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances
- + Article Nr. S2 = 2 pieces, S3 = 3 pieces, S4 = 4 pieces

Use insert stiffeners for installation on PE, PVC, PP or PB pipes! (page 116 & 117)



Technical details are subject to change. Typing errors may occur.

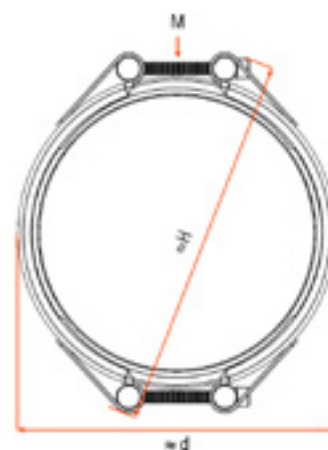



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S2-F-A-W5-*.762-782	762	782	762/768/769/770/773/780	2.5	6	138	40	824	852	M12	70	10.94	1
2-S2-F-A-W5-*.788-808	788	808	790/798/800/801/806/ 807.2/808	2.5	6	138	40	850	878	M12	70	11.15	1
2-S2-F-A-W5-*.812-832	812	832	812.8/820/822/824/826/830/832	2.5	6	138	40	874	902	M12	70	11.33	1
2-S2-F-A-W5-*.834-854	834	854	840/842/848/852	2.5	6	138	40	896	924	M12	70	11.51	1
2-S2-F-A-W5-*.862-882	862	882	864/868/869/879/880	2.5	6	138	40	924	952	M12	70	11.73	1
2-S2-F-A-W5-*.888-908	888	908	891/896/900/903/905.8	2.5	6	138	40	950	978	M12	70	11.93	1
2-S2-F-A-W5-*.910-930	910	930	912.4/914.4/915/920/924/927/928	2.5	6	138	40	972	1000	M12	70	12.11	1
2-S2-F-B-W5-*.942-962	942	962	945/950/951/952/956/960	2.5	6	140	40	1004	1032	M12	80	16.91	1
2-S2-F-B-W5-*.967-987	967	987	965/970/977/978/984.5	2.5	6	140	40	1029	1057	M12	80	17.21	1
2-S2-F-B-W5-*.990-1010	990	1010	990/992/996/1000/1008	2.5	6	140	40	1052	1080	M12	80	17.49	1
2-S2-F-B-W5-*.1010-1030	1010	1030	1015/1016/1020/1024/1027	2.5	6	140	40	1072	1100	M12	80	17.73	1
2-S2-F-B-W5-*.1050-1070	1050	1070	1054/1057/1068.3	2.5	6	140	40	1116	1146	M12	80	18.22	1
2-S2-F-B-W5-*.1082-1102	1082	1102	1086/1090.2/1100	2.5	6	140	40	1148	1178	M12	80	18.60	1
2-S2-F-B-W5-*.1110-1130	1110	1130	1118/1120.6/1128	2.5	6	140	40	1176	1206	M12	80	18.94	1
2-S3-F-B-W5-*.1147-1177	1147	1177	1152/1167/1172.5/1174	2.5	6	140	40	1223	1253	M12	80	22.15	1
2-S3-F-B-W5-*.1201-1231	1201	1231	1220/1228	2.5	6	140	40	1277	1307	M12	80	22.80	1
2-S3-F-B-W5-*.1250-1280	1250	1280	1255/1256/1261/1276.6	2.5	6	140	40	1326	1356	M12	80	23.40	1
2-S3-F-B-W5-*.1340-1370	1340	1370	1358	2.5	6	140	40	1416	1446	M12	80	24.48	1
2-S3-F-B-W5-*.1422-1452	1422	1452	1422/1449	2.5	6	140	40	1498	1528	M12	80	25.47	1
2-S3-F-C-W5-*.1441-1471	1441	1471	1462/1468	2.5	6	142	40	1517	1547	M12	80	25.70	1
2-S3-F-C-W5-*.1538-1568	1538	1568	1560/1565	2.5	6	142	40	1614	1644	M12	80	33.97	1
2-S4-F-C-W5-*.1632-1672	1632	1672	1640/1668	2.5	6	142	40	1718	1748	M12	80	38.56	1
2-S4-F-C-W5-*.1839-1879	1839	1879	1844/1875	2.5	6	142	40	1925	1955	M12	80	41.89	1
2-S4-F-C-W5-*.2012-2052	2012	2052	2020/2032/2048	2.5	6	142	40	2098	2128	M12	80	44.67	1
2-S4-F-C-W5-*.2050-2090	2050	2090	2082	2.5	6	142	40	2136	2166	M12	80	45.28	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-REP L Ø 36 - 172 MM / PN 16



Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	

## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Technical details are subject to change. Typing errors may occur.

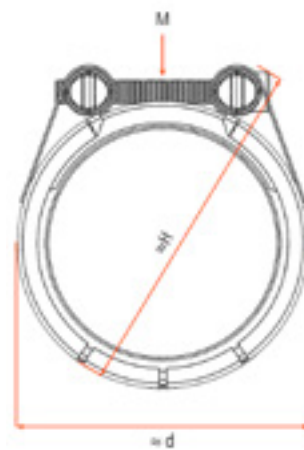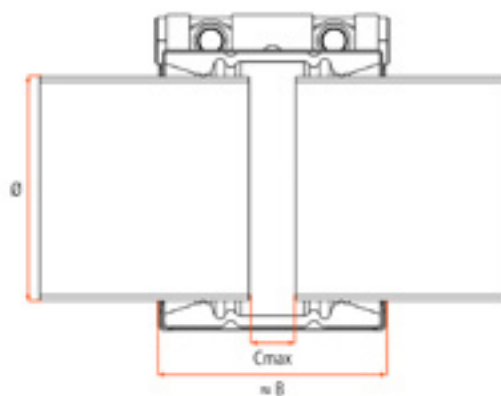



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-L-R-W5-*-36-39	36	39	38	16	25	60	15	66	104	M8	5	0.40	10
1-L-R-W5-*-39-43	39	43	42.4	16	25	60	15	66	104	M8	5	0.40	10
1-L-R-W5-*-43-47,5	43	47.5	44.5	16	25	60	15	74	112	M8	5	0.40	10
1-L-R-W5-*-47,5-52,5	47.5	52.5	48.3	16	25	60	15	74	112	M8	5	0.40	10
1-L-R-W5-*-52,5-58	52.5	58	54/57	16	25	75	25	85	125	M8	5	0.60	10
1-L-R-W5-*-58-64	58	64	60.3/63	16	25	75	25	85	125	M8	5	0.60	10
1-L-R-W5-*-64-72	64	72	66.6/68/69/70	16	25	95	30	108	164	M10	10	1.00	10
1-L-R-W5-*-72-80	72	80	73/76.1/79.5	16	25	95	30	108	164	M10	10	1.00	10
1-L-R-W5-*-80-88	80	88	84	16	25	95	30	124	170	M10	10	1.00	10
1-L-R-W5-*-88-96	88	96	88.9	16	25	95	30	124	170	M10	10	1.00	10
1-L-R-W5-*-97-105	97	105	98/100.6/101.6/104	16	25	95	30	141	187	M10	10	1.10	10
1-L-R-W5-*-104-112	104	112	104.8/108/110	16	25	95	30	141	187	M10	10	1.10	10
1-L-R-W5-*-112-120	112	120	114.3/118	16	25	95	30	158	202	M10	12.5	1.20	10
1-L-R-W5-*-122-130	122	130	125/127/129	16	25	95	30	158	202	M10	12.5	1.20	10
1-L-R-W5-*-129-137	129	137	130.2/131/133	16	25	110	40	178	230	M12	20	2.10	5
1-L-R-W5-*-137-145	137	145	139.7/141.3/141.6	16	25	110	40	186	238	M12	25	2.20	5
1-L-R-W5-*-149-157	149	157	154/155	16	25	110	40	197	249	M12	30	2.30	5
1-L-R-W5-*-157-165	157	165	159	16	25	110	40	205	255	M12	30	2.30	5
1-L-R-W5-*-164-172	164	172	165/168.3	16	25	110	40	212	262	M12	30	2.40	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-REP S Ø 36 - 172 MM / PN 16



Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +125°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	

## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances

Technical details are subject to change. Typing errors may occur.

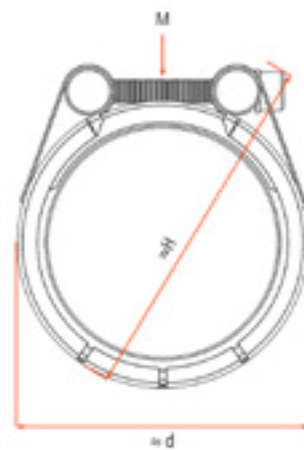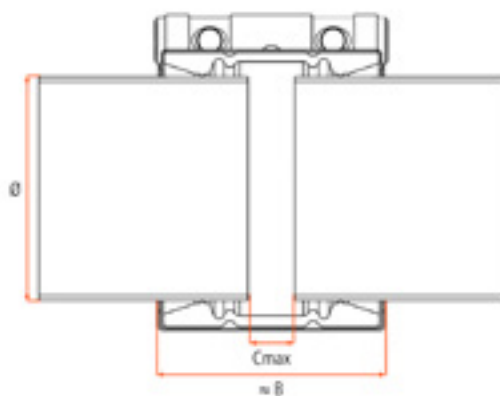





Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
1-S-R-W5-*-36-39	36	39	38	16	25	60	15	66	104	M8	5	0.40	10
1-S-R-W5-*-39-43	39	43	42.4	16	25	60	15	66	104	M8	5	0.40	10
1-S-R-W5-*-43-47,5	43	47.5	44.5	16	25	60	15	74	112	M8	5	0.40	10
1-S-R-W5-*-47,5-52,5	47.5	52.5	48.3	16	25	60	15	74	112	M8	5	0.40	10
1-S-R-W5-*-52,5-58	52.5	58	54/57	16	25	75	25	85	125	M8	5	0.60	10
1-S-R-W5-*-58-64	58	64	60.3/63	16	25	75	25	85	125	M8	5	0.60	10
1-S-R-W5-*-64-72	64	72	66.6/68/69/70	16	25	95	30	108	164	M10	10	1.00	10
1-S-R-W5-*-72-80	72	80	73/76.1/79.5	16	25	95	30	108	164	M10	10	1.00	10
1-S-R-W5-*-80-88	80	88	84	16	25	95	30	124	170	M10	10	1.00	10
1-S-R-W5-*-88-96	88	96	88.9	16	25	95	30	124	170	M10	10	1.00	10
1-S-R-W5-*-97-105	97	105	98/100.6/101.6/104	16	25	95	30	141	187	M10	10	1.10	10
1-S-R-W5-*-104-112	104	112	104.8/108/110	16	25	95	30	141	187	M10	10	1.10	10
1-S-R-W5-*-112-120	112	120	114.3/118	16	25	95	30	158	202	M10	12.5	1.20	10
1-S-R-W5-*-122-130	122	130	125/127/129	16	25	95	30	158	202	M10	12.5	1.20	10
1-S-R-W5-*-129-137	129	137	130.2/131/133	16	25	110	40	178	230	M12	20	2.10	5
1-S-R-W5-*-137-145	137	145	139.7/141.3/141.6	16	25	110	40	186	238	M12	25	2.20	5
1-S-R-W5-*-149-157	149	157	154/155	16	25	110	40	197	249	M12	30	2.30	5
1-S-R-W5-*-157-165	157	165	159	16	25	110	40	205	255	M12	30	2.30	5
1-S-R-W5-*-164-172	164	172	165/168.3	16	25	110	40	212	262	M12	30	2.40	5

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-REP S Ø 188 - 745 MM / PN 16



Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	

## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances
- + Article Nr. S2 = 2 pieces

Technical details are subject to change. Typing errors may occur.

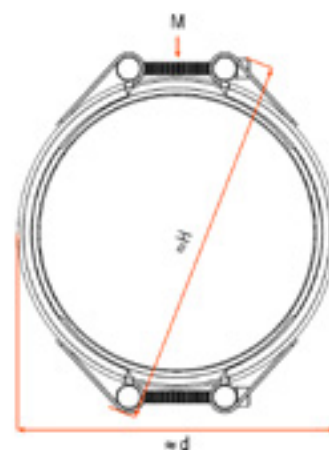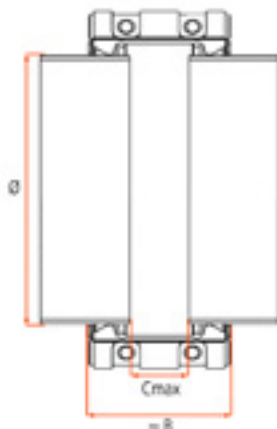



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S2-R-B-W5-*-188-198	188	198	190/191/193.7/195/196/197	16	25	140	40	236	262	M12	30	7.80	1
2-S2-R-B-W5-*-201-211	201	211	202/203/204/205/206/208/210	16	25	140	40	249	275	M12	30	7.96	1
2-S2-R-B-W5-*-213-223	213	223	215/216/217/219.1/220/222	16	25	140	40	261	287	M12	30	7.10	1
2-S2-R-B-W5-*-224-234	224	234	224/225/226/228/229/230/232/234	16	25	140	40	272	298	M12	30	8.24	1
2-S2-R-B-W5-*-237-247	237	247	238/240/241/242/244/244.5/246	16	25	140	40	285	311	M12	30	8.39	1
2-S2-R-B-W5-*-250-260	250	260	250/252/254/255/256/257/259	16	25	140	40	298	324	M12	30	8.55	1
2-S2-R-B-W5-*-266-276	266	276	268/267/271/272/273.1/274/275	16	25	140	40	314	340	M12	30	8.74	1
2-S2-R-C-W5-*-280-290	280	290	280/284/286/287/288/289	16	25	142	40	328	354	M16	30	10.66	1
2-S2-R-C-W5-*-291-301	291	301	292/295/296/298/300	16	25	142	40	339	365	M16	30	10.84	1
2-S2-R-C-W5-*-304-314	304	314	304/305/306/308/310/311/313	16	25	142	40	352	378	M16	30	11.05	1
2-S2-R-C-W5-*-318-328	318	328	318/320/321/323.9/326/327	16	25	142	40	366	392	M16	30	11.27	1
2-S2-R-C-W5-*-330-340	330	340	330/333.8/334/336/337/339	16	25	142	40	378	404	M16	50	11.46	1
2-S2-R-C-W5-*-343-353	343	353	343/345/346/348/350/352	16	25	142	40	391	417	M16	50	11.67	1
2-S2-R-C-W5-*-353-363	353	363	353/354/355/355.6/356/358/360/362	16	25	142	40	401	427	M16	50	11.83	1
2-S2-R-G-W5-*-364-374	364	374	367/368/372	16	25	146	40	412	438	M16	50	16.10	1
2-S2-R-G-W5-*-377-387	377	387	378/380/382/384/385/386	16	25	146	40	425	451	M16	50	16.42	1
2-S2-R-G-W5-*-390-400	390	400	392/394/395/396/398/399	16	25	146	40	438	464	M16	50	16.75	1
2-S2-R-G-W5-*-403-413	403	413	403/404/405/406/406.4/408/410/412	16	25	146	40	451	477	M16	50	17.08	1
2-S2-R-G-W5-*-415-425	415	425	419/420/421	16	25	146	40	463	489	M16	50	17.38	1
2-S2-R-G-W5-*-425-435	425	435	426/427/428/429/430/432/433/434	16	25	146	40	473	499	M16	50	17.63	1
2-S2-R-G-W5-*-441-451	441	451	441/442/444/448/450	16	25	146	40	489	515	M16	50	18.03	1
2-S2-R-G-W5-*-454-464	454	464	454/456/457.2/459/460/463	16	25	146	40	502	528	M16	50	18.35	1
2-S2-R-G-W5-*-463-473	463	473	464/468/470	16	25	146	40	511	537	M16	50	18.58	1
2-S2-R-G-W5-*-479-489	479	489	480/486/488	16	25	146	40	527	553	M16	50	18.98	1
2-S2-R-G-W5-*-491-501	491	501	492/494/496/498/500	16	25	146	40	539	565	M16	50	19.28	1
2-S2-R-G-W5-*-506-516	506	516	506/507/508/510/512/514/515	16	25	146	40	554	580	M16	50	19.66	1
2-S2-R-G-W5-*-523-533	523	533	524/526/530/532	16	25	146	40	575	603	M16	60	20.08	1
2-S2-R-G-W5-*-534-544	534	544	537/538/540/542/543	16	25	146	40	586	614	M16	60	20.36	1
2-S2-R-G-W5-*-549-559	549	559	549/550/558	16	25	146	40	601	629	M16	60	20.74	1
2-S2-R-G-W5-*-560-570	560	570	560/564/568	16	25	146	40	612	640	M16	60	21.01	1
2-S2-R-G-W5-*-574-584	574	584	574/576/582/583	16	25	146	40	626	654	M16	60	21.36	1
2-S2-R-G-W5-*-603-613	603	613	605/606/609.6/610/612	16	25	146	40	655	683	M16	60	22.09	1
2-S2-R-G-W5-*-613-623	613	623	613.7/620/622	16	25	146	40	665	693	M16	70	22.34	1
2-S2-R-G-W5-*-631-641	631	641	632/633/634/635/640	16	25	146	40	683	711	M16	70	22.79	1
2-S2-R-G-W5-*-651-661	651	661	651/654/655/658/659/660	16	25	146	40	703	731	M16	70	23.29	1
2-S2-R-G-W5-*-679-689	679	689	680/686/688	16	25	146	40	731	759	M16	70	23.99	1
2-S2-R-G-W5-*-691-701	691	701	691/698/700	16	25	146	40	743	771	M16	70	24.30	1
2-S2-R-G-W5-*-703-713	703	713	705/710/711.2	16	25	146	40	755	783	M16	70	24.60	1
2-S2-R-G-W5-*-720-730	720	730	720/726/729	16	25	146	40	772	800	M16	70	25.02	1
2-S2-R-G-W5-*-735-745	735	745	735/738/743/744	16	25	146	40	787	815	M16	70	25.40	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-REP S Ø 188 - 745 MM / PN 10


Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	

## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances
- + Article Nr. S2 = 2 pieces

Technical details are subject to change. Typing errors may occur.

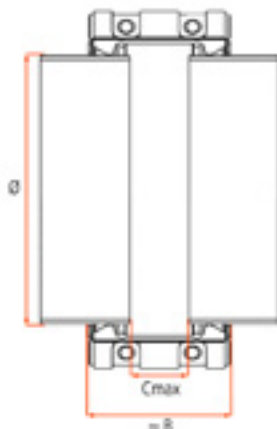



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S2-R-A-W5*-188-198	188	198	190/191/193.7/195/196/197	10	16	138	40	236	262	M12	30	6.41	1
2-S2-R-A-W5*-201-211	201	211	202/203/204/205/206/208/210/211	10	16	138	40	249	275	M12	30	6.51	1
2-S2-R-A-W5*-213-223	213	223	215/216/217/219.1/220/222	10	16	138	40	261	287	M12	30	6.61	1
2-S2-R-A-W5*-224-234	224	234	224/225/226/228/229/230/232/234	10	16	138	40	272	298	M12	30	6.69	1
2-S2-R-A-W5*-237-247	237	247	238/240/241/242/244/244.5/246	10	16	138	40	285	311	M12	30	6.80	1
2-S2-R-A-W5*-250-260	250	260	250/252/254/255/256/257/259	10	16	138	40	298	324	M12	30	6.90	1
2-S2-R-A-W5*-266-276	266	276	268/267/271/272/273.1/274/275	10	16	138	40	314	340	M12	30	7.02	1
2-S2-R-B-W5*-280-290	280	290	280/284/286/287/288/289	10	16	140	40	328	354	M12	30	8.91	1
2-S2-R-B-W5*-291-301	291	301	292/295/296/298/300	10	16	140	40	339	365	M12	30	9.05	1
2-S2-R-B-W5*-304-314	304	314	304/305/306/308/310/311/313	10	16	140	40	352	378	M12	30	9.20	1
2-S2-R-B-W5*-318-328	318	328	318/320/321/323.9/326/327	10	16	140	40	366	392	M12	30	9.37	1
2-S2-R-B-W5*-330-340	330	340	330/333.8/334/336/337/339/340	10	16	140	40	378	404	M12	40	9.52	1
2-S2-R-B-W5*-343-353	343	353	343/345/346/348/350/352	10	16	140	40	391	417	M12	40	9.67	1
2-S2-R-B-W5*-353-363	353	363	353/354/355/355.6/356/358/360/362	10	16	140	40	401	427	M12	40	9.79	1
2-S2-R-C-W5*-364-374	364	374	367/368/372	10	16	142	40	412	438	M12	40	12.01	1
2-S2-R-C-W5*-377-387	377	387	378/380/382/384/385/386	10	16	142	40	425	451	M12	40	12.22	1
2-S2-R-C-W5*-390-400	390	400	392/394/395/396/398/399/400	10	16	142	40	438	464	M12	40	12.43	1
2-S2-R-C-W5*-403-413	403	413	403/404/405/406/406.4/408/410/412	10	16	142	40	451	477	M12	40	12.64	1
2-S2-R-C-W5*-415-425	415	425	419/420/421	10	16	142	40	463	489	M12	40	12.83	1
2-S2-R-C-W5*-425-435	425	435	426/427/428/429/430/432/433/434	10	16	142	40	473	499	M12	40	12.99	1
2-S2-R-C-W5*-441-451	441	451	441/442/444/448/450	10	16	142	40	489	515	M12	40	13.25	1
2-S2-R-C-W5*-454-464	454	464	454/456/457.2/459/460/463	10	16	142	40	502	528	M12	40	13.46	1
2-S2-R-C-W5*-463-473	463	473	464/468/470	10	16	142	40	511	537	M12	40	13.60	1
2-S2-R-C-W5*-479-489	479	489	480/486/488	10	16	142	40	527	553	M12	40	13.89	1
2-S2-R-C-W5*-491-501	491	501	492/494/496/498/500	10	16	142	40	539	565	M12	40	14.05	1
2-S2-R-C-W5*-506-516	506	516	506/507/508/510/512/514/515	10	16	142	40	554	580	M12	40	14.29	1
2-S2-R-C-W5*-523-533	523	533	524/526/530/532	10	16	142	40	575	603	M16	50	14.57	1
2-S2-R-C-W5*-534-544	534	544	537/538/540/542/543	10	16	142	40	586	614	M16	50	14.74	1
2-S2-R-C-W5*-549-559	549	559	549/550/558/559	10	16	142	40	601	629	M16	50	14.99	1
2-S2-R-C-W5*-560-570	560	570	560/564/568	10	16	142	40	612	640	M16	50	15.16	1
2-S2-R-C-W5*-574-584	574	584	574/576/582/583	10	16	142	40	626	654	M16	50	15.39	1
2-S2-R-C-W5*-603-613	603	613	605/606/609.6/610/612	10	16	142	40	655	683	M16	50	15.85	1
2-S2-R-C-W5*-613-623	613	623	613.7/620/622	10	16	142	40	665	693	M16	60	16.02	1
2-S2-R-C-W5*-631-641	631	641	632/633/634/635/640	10	16	142	40	683	711	M16	60	16.30	1
2-S2-R-C-W5*-651-661	651	661	651/654/655/658/659/660	10	16	142	40	703	731	M16	60	16.63	1
2-S2-R-C-W5*-679-689	679	689	680/686/688	10	16	142	40	731	759	M16	60	17.08	1
2-S2-R-C-W5*-691-701	691	701	691/698/700	10	16	142	40	743	771	M16	60	17.27	1
2-S2-R-C-W5*-703-713	703	713	705/710/711.2	10	16	142	40	755	783	M16	60	17.46	1
2-S2-R-C-W5*-720-730	720	730	720/726/729	10	16	142	40	772	800	M16	60	17.74	1
2-S2-R-C-W5*-735-745	735	745	735/738/743/744	10	16	142	40	787	815	M16	60	17.98	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# UNI-REP S Ø 280 - 745 MM / PN 6



Steel materials Components	W5 (standard)	W4 (on request)	W2 (on request)	
Casing	1.4571 / 316 Ti	1.4301 / 304	1.4016 / 301	
Bolts	A4-80 / 316 Ti	A4-80 / 316 Ti	A4-80 / 316 Ti	
Bars	1.4571 / 316 Ti	1.4301 / 304	1.0760 / 1141	
Strip Insert (Optional)	1.4571 (316 Ti)	1.4571 (316 Ti)	1.4571 (316 Ti)	

Sealing Sleeve Application	EPDM	NBR	Viton	Silicone (on request)
Temperature range	-30°C up to +80°C	-20°C up to +80°C	-20°C up to +180°C	
Medium	all qualities of water, waste water, air, solids and chemical products	water, gas, oil, fuel and other hydrocarbons	ozone, oxygen, acids, gas, oil and fuel (only with strip insert)	

## Important remarks:

- + Follow fitting/disassembly instructions
- + The pressure values are valid for radial rigid carbon steel pipes with a minimal wall thickness under static loads
- + For metric to imperial conversion table see page 26
- + Strip inserts are required for special applications
- + PN = shipbuilding industry 4 X safety factor
- + WP = industrial applications 1.5 X safety factor
- + Free from paint wetting disruptive substances
- + Article Nr. S2 = 2 pieces

Technical details are subject to change. Typing errors may occur.

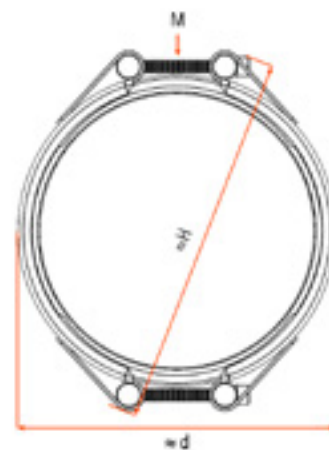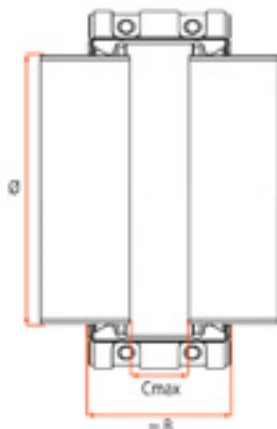



Article Nr.	OD Ø min.	OD Ø max.	OD Ø Nominal	Pressure		Coupling dimensions not fitted					Torque rate (Nm)	Weight ≈ kg/pcs.	Packing quantity
				PN	WP	≈ B	Cmax	≈ d	≈ H	M			
2-S2-R-A-W5-*-280-290	280	290	280/284/286/287/288/289	6	10	138	40	328	354	M12	30	7.14	1
2-S2-R-A-W5-*-291-301	291	301	292/295/296/298/300	6	10	138	40	339	365	M12	30	7.22	1
2-S2-R-A-W5-*-304-314	304	314	304/305/306/308/310/311/313	6	10	138	40	352	378	M12	30	7.32	1
2-S2-R-A-W5-*-318-328	318	328	318/320/321/323.9/326/327	6	10	138	40	366	392	M12	30	7.44	1
2-S2-R-A-W5-*-330-340	330	340	330/333.8/334/336/337/339/340	6	10	138	40	378	404	M12	40	7.53	1
2-S2-R-A-W5-*-343-353	343	353	343/345/346/348/350/352	6	10	138	40	391	417	M12	40	7.63	1
2-S2-R-A-W5-*-353-363	353	363	353/354/355/355.6/356/358/360/362	6	10	138	40	401	427	M12	40	7.71	1
2-S2-R-A-W5-*-364-374	364	374	367/368/372	6	10	138	40	412	438	M12	40	7.80	1
2-S2-R-A-W5-*-377-387	377	387	378/380/382/384/385/386	6	10	138	40	425	451	M12	40	7.90	1
2-S2-R-A-W5-*-390-400	390	400	392/394/395/396/398/399/400	6	10	138	40	438	464	M12	40	8.00	1
2-S2-R-A-W5-*-403-413	403	413	403/404/405/406/406.4/408/410/412	6	10	138	40	451	477	M12	40	8.11	1
2-S2-R-A-W5-*-415-425	415	425	419/420/421	6	10	138	40	463	489	M12	40	8.20	1
2-S2-R-A-W5-*-425-435	425	435	426/427/428/429/430/432/433/434	6	10	138	40	473	499	M12	40	8.28	1
2-S2-R-A-W5-*-441-451	441	451	441/442/444/448/450	6	10	138	40	489	515	M12	40	8.41	1
2-S2-R-A-W5-*-454-464	454	464	454/456/457.2/459/460/463	6	10	138	40	502	528	M12	40	8.51	1
2-S2-R-A-W5-*-463-473	463	473	464/468/470	6	10	138	40	511	537	M12	40	8.58	1
2-S2-R-A-W5-*-479-489	479	489	480/486/488	6	10	138	40	527	553	M12	40	8.71	1
2-S2-R-A-W5-*-491-501	491	501	492/494/496/498/500	6	10	138	40	539	565	M12	40	8.80	1
2-S2-R-A-W5-*-506-516	506	516	506/507/508/510/512/514/515	6	10	138	40	554	580	M12	40	8.92	1
2-S2-R-B-W5-*-523-533	523	533	524/526/530/532	6	10	140	40	575	603	M12	50	11.85	1
2-S2-R-B-W5-*-534-544	534	544	537/538/540/542/543	6	10	140	40	586	614	M12	50	11.98	1
2-S2-R-B-W5-*-549-559	549	559	549/550/558/559	6	10	140	40	601	629	M12	50	12.16	1
2-S2-R-B-W5-*-560-570	560	570	560/564/568	6	10	140	40	612	640	M12	50	12.30	1
2-S2-R-B-W5-*-574-584	574	584	574/576/582/583	6	10	140	40	626	654	M12	50	12.46	1
2-S2-R-B-W5-*-603-613	603	613	605/606/609.6/610/612	6	10	140	40	655	683	M12	50	12.81	1
2-S2-R-B-W5-*-613-623	613	623	613.7/620/622	6	10	140	40	665	693	M12	60	12.94	1
2-S2-R-B-W5-*-631-641	631	641	632/633/634/635/640	6	10	140	40	683	711	M12	60	13.15	1
2-S2-R-B-W5-*-651-661	651	661	651/654/655/658/659/660	6	10	140	40	703	731	M12	60	13.39	1
2-S2-R-B-W5-*-679-689	679	689	680/686/688	6	10	140	40	731	759	M12	60	13.73	1
2-S2-R-B-W5-*-691-701	691	701	691/698/700	6	10	140	40	743	771	M12	60	13.88	1
2-S2-R-B-W5-*-703-713	703	713	705/710/711.2	6	10	140	40	755	783	M12	60	14.02	1
2-S2-R-B-W5-*-720-730	720	730	720/726/729	6	10	140	40	772	800	M12	60	14.23	1
2-S2-R-B-W5-*-735-745	735	745	735/738/743/744	6	10	140	40	787	815	M12	60	14.41	1

\*Article Nr.: E for EPDM, N for NBR and V for Viton

# INSERTS

## Economy Insert

- + Suitable for PE, PVC, PP and PB plastic pipes
- + Stainless steel 1.4310 (W2) quality
- + Insert without range
- + Other dimensions on request



Article Nr.	D (mm)	E (mm)	SDR	L (mm)
IS1.040.037	40	3.7	11.0	100
IS1.050.046	50	4.6	11.0	100
IS1.050.029	50	2.9	17.6 / 17.0	100
IS1.063.058	63	5.8	11.0	100
IS1.063.036	63	3.6	17.6 / 17.0	100
IS1.075.068	75	6.8	11.0	100
IS1.075.043	75	4.3	17.6 / 17.0	100
IS1.090.082	90	8.2	11.0	120
IS1.090.052	90	5.2	17.6 / 17.0	120
IS1.110.100	110	10.0	11.0	120
IS1.110.063	110	6.3	17.6 / 17.0	120
IS1.125.114	125	11.4	11.0	120
IS1.125.072	125	7.2	17.6 / 17.0	120
IS1.140.127	140	12.7	11.0	140
IS1.140.080	140	8.0	17.6 / 17.0	140
IS1.160.146	160	14.6	11.0	140
IS1.160.091	160	9.1	17.6 / 17.0	140
IS1.180.164	180	16.4	11.0	140
IS1.180.107	180	10.7	17.0	140
IS1.180.103	180	10.3	17.6	140
IS1.200.182	200	18.2	11.0	160
IS1.200.119	200	11.9	17.0	160
IS1.200.114	200	11.4	17.6	160
IS1.225.205	225	20.5	11.0	160
IS1.225.134	225	13.4	17.0	160
IS1.225.128	225	12.8	17.6	160
IS1.250.228	250	22.8	11.0	160
IS1.250.148	250	14.8	17.0	160
IS1.250.143	250	14.3	17.6	160
IS1.280.255	280	25.5	11.0	160
IS1.280.166	280	16.6	17.0	160
IS1.280.160	280	16.0	17.6	160
IS1.315.287	315	28.7	11.0	160
IS1.315.187	315	18.7	17.0	160
IS1.315.179	315	17.9	17.6	160
IS1.355.323	355	32.3	11.0	160
IS1.355.211	355	21.1	17.0	160
IS1.355.202	355	20.2	17.6	160



## Insert with wedge

- + Suitable for PE, PVC, PP or PB plastic pipes
- + Stainless steel 1.4310 (W2) quality
- + Insert with range
- + Other dimensions on request



Article Nr.	D (mm)	E (mm)	SDR	L (mm)
ISO.063.086	63	8.6	7.4	175
ISO.063.058	63	5.8	11	175
ISO.063.036	63	3.6	17	175
ISO.075.103	75	10.3	7.4	175
ISO.075.068	75	6.8	11	175
ISO.075.043	75	4.3	17	175
ISO.090.123	90	12.3	7.4	175
ISO.090.082	90	8.2 / 8.7	11	175
ISO.090.054	90	5.4 / 5.1	17 / 17.6	175
ISO.090.027	90	2.7 / 2.2	41	175
ISO.110.151	110	15.1	7.4	175
ISO.110.100	110	10 / 9.5	11	175
ISO.110.066	110	6.6 / 6.3	17 / 17.6	175
ISO.125.114	125	11.4	11	175
ISO.125.074	125	7.4 / 7.1	17 / 17.6	175
ISO.125.037	125	3.7 / 3.1	41	175
ISO.140.128	140	12.8	11	175
ISO.140.080	140	8	17.6	175
ISO.160.146	160	14.6	11	200
ISO.160.095	160	9.5 / 9.1	17 / 17.6	200
ISO.160.045	160	4.5 / 3.9	41	200
ISO.180.164	180	16.4	11	200
ISO.180.107	180	10.7 / 10.2	17 / 17.6	200
ISO.180.060	180	6	33	200
ISO.200.182	200	18.2	11	200
ISO.200.119	200	11.9 / 11.4	17 / 17.6	200
ISO.200.069	200	6.9	33	200
ISO.225.205	225	20.5	11	225
ISO.225.134	225	13.4 / 12.8	17 / 17.6	225
ISO.225.063	225	6.3 / 5.5	41	225
ISO.250.227	250	22.7	11	225
ISO.250.148	250	14.8 / 14.2	17 / 17.6	225
ISO.280.254	280	25.4	11	225
ISO.280.166	280	16.6 / 15.9	17 / 17.6	225
ISO.315.286	315	28.6	11	225
ISO.315.187	315	18.7	17	225
ISO.315.179	315	17.9	17.6	225
ISO.355.323	355	32.3	11	225
ISO.355.211	355	21.1	17	225
ISO.355.201	355	20.1	17.6	225

# UNI-FIRE Ø 21 - 425 MM

## Fire protective housing

- + Suitable for any type of coupling
- + Stainless steel 1.4571 (W5) quality
- + Transforms regular couplings into fire protective couplings
- + Other dimensions on request

Article Nr.	OD Ø min.	OD Ø max.	Compatible with coupling range
1-V-W5-21-29	21	29	21-24 / 26-29
1-V-W5-29-36	29	36	29-32 / 33-36
1-V-W5-36-43	36	43	36-39 / 39-43
1-V-W5-43-52,5	43	52.5	43-47.5 / 47,5-52,5
1-V-W5-52,5-64	52.5	64	52,5-58 / 58-64
1-V-W5-64-80	64	80	64-72 / 72-80
1-V-W5-80-96	80	96	80-88 / 88-96
1-V-W5-97-113	97	113	97-105 / 104-112
1-V-W5-113-130	113	130	112-120 / 122-130
1-V-W5-130-138	130	138	129-137
1-V-W5-138-146	138	146	137-145
1-V-W5-149-157	149	157	149-157
1-V-W5-157-165	157	165	157-165
1-V-W5-164-172	164	172	164-172
2-V-W5-175-185	175	185	175-185
2-V-W5-188-198	188	198	188-198
2-V-W5-201-211	201	211	201-211
2-V-W5-213-223	213	223	213-223
2-V-W5-224-234	224	234	224-234
2-V-W5-237-247	237	247	237-247
2-V-W5-250-260	250	260	250-260
2-V-W5-266-276	266	276	266-276
2-V-W5-280-290	280	290	280-290
2-V-W5-291-301	291	301	291-301
2-V-W5-304-314	304	314	304-314
2-V-W5-318-328	318	328	318-328
2-V-W5-330-340	330	340	330-340
2-V-W5-343-353	343	353	343-353
2-V-W5-353-363	353	363	353-363
2-V-W5-364-374	364	374	364-374
2-V-W5-377-387	377	387	377-387
2-V-W5-390-400	390	400	390-400
2-V-W5-403-413	403	413	403-413
2-V-W5-415-425	415	425	415-425



# CHECKLIST FOR INFORMATION REQUEST

Criteria:	Pipe 1:	Pipe 2:
Employed pipe materials acc. DIN / AISI		
Strength of the pipe materials to be joined		
Pipe outside diameters (OD)		
Wall thickness		
Working pressure		
Test pressure		
Connecting technique used		
Medium to be conveyed		
Temperature of medium in °C, min./max.		
Surrounding medium		
Surrounding temperature		
Pipe laying (open, in shaft or buried)		
Type approval desired		
Estimated quantity of joints		

## NOTES

[illegible]



Handwriting practice lines consisting of 20 horizontal lines. Each line is preceded by a small vertical tick mark on the left side.

## NOTES

[illegible]



Handwriting practice lines consisting of 20 horizontal rows. Each row is defined by two parallel lines, with the top line being a thin grey line and the bottom line being a slightly thicker purple line.

