


Työntömuhvi (PECB) Express liitoksella DN60-1200

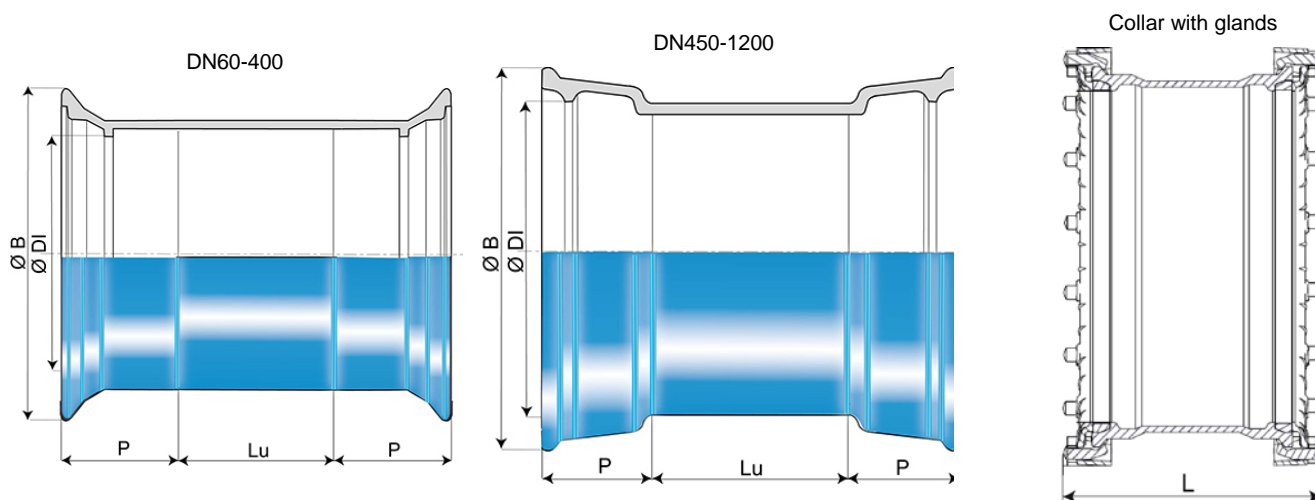

DN	L	Lu	P	Ø DI	Ø B	Paino	Tuotenumero
mm	mm	mm	mm	mm	mm	kg	
60	454	156	76	80.3	143.5	6.9	SEA60MN00TT
80	466	158	79	101.4	167.5	8.8	SEA80MN00TT
100	472	160	80	121.4	187.5	7.1	SEB10MN00TT
125	481	165	83	147.4	214.5	8.7	SEB12MN00TT
150	487	165	86	173.4	241.5	10.4	SEB15MN00TT
200	496	170	92	225.5	294.5	14.5	SEB20MN00TT
250	517	175	100	276.8	351.0	24.3	SEB25MN00TT
300	532	180	105	328.8	408.2	30.2	SEB30MN00TT
350	547	185	110	380.8	463.2	55.0	SEB35MN00TT
400	552	190	110	432.0	515.2	67.0	SEB40MN00TT
450	624	195	120	483.0	575.0	76.0	SEB45MN00TT
500	629	200	120	535.0	628.2	100.0	SEB50MN00TT
600	669	210	135	638.6	737.5	131.0	SEB60MN00TT
700	691	220	140	742.0	861.0	183.0	SEB70MN00TT
800	701	230	140	846.0	972.0	226.0	SEB80MN00TT
900	711	240	140	949.0	1080.0	274.0	SEB90MN00TT
1000	721	250	140	1052.0	1189.0	325.0	SEC10MN00TT
1100	851	260	200	1155.0	1298.0	500.0	SEC11MN00TT
1200	785	270	162	1259.0	1411.0	470.0	SEC12MN00TT

Käyttökohde

- Juomavedelle ja jätevesille
- Aggressiivisiin maaperiin

Ominaisuudet

- Ulko- ja sisäpinnoite: Sininen epoksipulveri 250 µm keskimääräinen paksuus 200 µm EN 14901 mukaisesti
- EN 545:2010 ja ISO 2531:2009 standardien mukainen